

BLACKJACK[®]
L I G H T I N G

PROFESSIONAL CATALOG • 2019



ABOUT BLACKJACK LIGHTING

Blackjack Lighting leads the industry in innovative decorative lighting design. Winner of multiple awards, Blackjack Lighting's pendant, surface and table fixtures make the most of LED light sources.

Engineering expertise, design ingenuity and elegant artistry feed every Blackjack Lighting design. Created from the highest quality materials you would expect from the decorative LED lighting leader including: tightly binned LEDs, custom optics, commercial-grade components and more.

Contemporary at its core, Blackjack Lighting adds shape, color, dimension and scale to both residential and commercial spaces. Stephen Blackman brings over 30 years design experience to our offering of unique chandeliers, pendants, surface fixtures and table lamps. Visit blackjacklighting.com to see all of these products.

HIGHLIGHTS

NEW Chandeliers and Pendants: Continued evolution of fixtures that are hallmarks of the Blackjack name. Our Prism series (p. 10) grows both horizontally and vertically to accommodate the needs of your space. Geodome (p. 18) plays on the idea of negative space as functionally decorative.

NEW Pendant Shapes and Sizes: From the sleek contemporary lines of Aero (p. 20) to the pleasing circular forms of Circuit (p. 24) to the architectural sensibility of Domos (p. 64), our latest forms add modern style and sophistication to a range of commercial and residential environments.

NEW Surface Mounts: Pairing versatility with a clean aesthetic, the Milo series (p. 92) offers a pleasing, even glow in both vanity and sconce form.

NEW Task Light: A great combination of flexibility, value and style, Flexi (p. 116) brings light right where you need it. Rotate, position, illuminate.

NEW Decorative Multi-Lights: We have expanded our offering of multi-light canopy (p. 120-147) and pendant (p. 124-127) options. Mix and match and enjoy.

NEW Modular Systems: (p. 148-169) More flexibility in size and scale from Quatro, Duo and Solo modular systems. They offer great options for practically any space.

Duo Modular System/ Linear 9L
Frosted Globe pendant
Matte Black, Random

BLACKJACK®

CHANDELIERS AND LARGE PENDANTS



Prism pg. 10




Facets pg. 14



Geodome pg. 18



Aero pg. 20



Spectra pg. 22



Circuit pg. 24



Kona pg. 26



Iridium pg. 28



Dot pg. 30



Starburst pg. 32



Wedge pg. 38



Swirl pg. 40



Staxx pg. 44



Steelos pg. 48



Seraph pg. 52

LINEAR PENDANTS



Float pg. 56



Flair pg. 58



Quadra pg. 60



Over-Counter pg. 62

SMALL PENDANTS



Domos pg. 64



Pill Box pg. 66



Cirq pg. 68



Double Quadra pg. 70



Tria pg. 72



Boxer pg. 74



Glass Sphere pg. 76



Velo pg. 78



Bullet pg. 80



Novo Short pg. 82



Novo Tall pg. 83



Globe pg. 84



Color Gel pg. 86



Artisan Ring pg. 87



Light Guide pg. 88



Light Guide pg. 89

VANITIES



Milo pg. 92



Nano pg. 94



Lino pg. 96



Frost pg. 98



Equis pg. 100



Cube pg. 102



Quadra pg. 104



Bounce pg. 105

FLUSH MOUNTS



Nano pg. 94



Frost pg. 98



Equis pg. 100



Cube pg. 102



Halos pg. 106



Quadra pg. 108



Grid pg. 110

SCONCES



Milo pg. 112



Nano pg. 113



Lino pg. 114



Equis pg. 115

TABLE OF CONTENTS

08 SUSPENDED

- 10 PRISM CHANDELIER
- 14 FACETS CHANDELIER
- 18 GEODOME PENDANT
- 20 AERO PENDANT
- 22 SPECTRA PENDANT
- 24 CIRCUIT PENDANT
- 26 KONA PENDANT
- 28 IRIIDIUM PENDANT
- 30 DOT CHANDELIER
- 32 STARBURST CHANDELIER
- 38 WEDGE PENDANT
- 40 SWIRL PENDANT
- 42 SWIRL RGBW PENDANT
- 44 STAXX PENDANT
- 48 STEELOS PENDANT
- 52 SERAPH PENDANT
- 56 FLOAT LINEAR PENDANT
- 58 FLAIR LINEAR PENDANT
- 60 QUADRA LINEAR PENDANT
- 62 OVER-COUNTER PENDANT
- 64 DOMOS PENDANT
- 66 PILLBOX PENDANT
- 68 CIRQ PENDANT
- 70 QUADRA DOUBLE PENDANT
- 72 TRIA PENDANT
- 74 BOXER PENDANT
- 76 GLASS SPHERE PENDANT
- 78 VELO GLASS PENDANT
- 80 BULLET PENDANT
- 82 NOVO PENDANT
- 84 GLOBE PENDANT
- 86 COLOR GEL PENDANT
- 87 ARTISAN RING PENDANT
- 88 LIGHT GUIDE PENDANT

90 SURFACE

- 92 MILO SERIES
- 94 NANO SERIES
- 96 LINO SERIES
- 98 FROST SERIES
- 100 EQUIS SERIES
- 102 CUBE SERIES
- 104 QUADRA VANITY
- 105 BOUNCE VANITY
- 106 HALOS FLUSH MOUNT
- 108 QUADRA FLUSH MOUNT
- 110 GRID FLUSH MOUNT
- 112 MILO SCONCE
- 113 NANO SCONCE
- 114 LINO SCONCE
- 115 EQUIS SCONCE



Solo Modular System/ Grid
Frosted Globe Pendants
Polished Chrome

TASK LAMPS



Flexi pg. 116



Flexi pg. 116



Edge2 pg. 118

MULTI-PORT CANOPIES + PENDANTS



10" Round/ 3 Port
pg. 128



20" Round/ 3 Port
pg. 132



24" Square/ 9 Port
pg. 136



38" Rectangle/ 10 Port
pg. 140



22" Linear/ 5 Port
pg. 144



10" Round/ 9 Port
pg. 130



20" Round/ 12 Port
pg. 134



24" Square/ 25 Port
pg. 138



38" Rectangle/ 18 Port
pg. 142



48" Linear/ 11 Port
pg. 146

MODULAR SYSTEMS



Quatro System
pg. 152



Duo System
pg. 158



Solo System
pg. 160

TABLE OF CONTENTS

116 TASK LAMPS

116 FLEXI TASK LAMP

118 EDGE2 TASK LAMP

120 MULTI-PORT CANOPIES+PENDANTS

124 MULTI-PORT PENDANTS

128 ROUND MULTI-PORT CANOPY

136 SQUARE MULTI-PORT CANOPY

140 RECTANGLE MULTI-PORT CANOPY

144 LINEAR MULTI-PORT CANOPY

148 MODULAR SYSTEMS

152 QUATRO MODULAR SYSTEM

158 DUO MODULAR SYSTEM

160 SOLO MODULAR SYSTEM

32" Prism 5-Tier
Satin Nickel





SUSPENDED

28" Prism 3-Tier
Satin Nickel






32" PRISM 3-TIER



32" PRISM 5-TIER

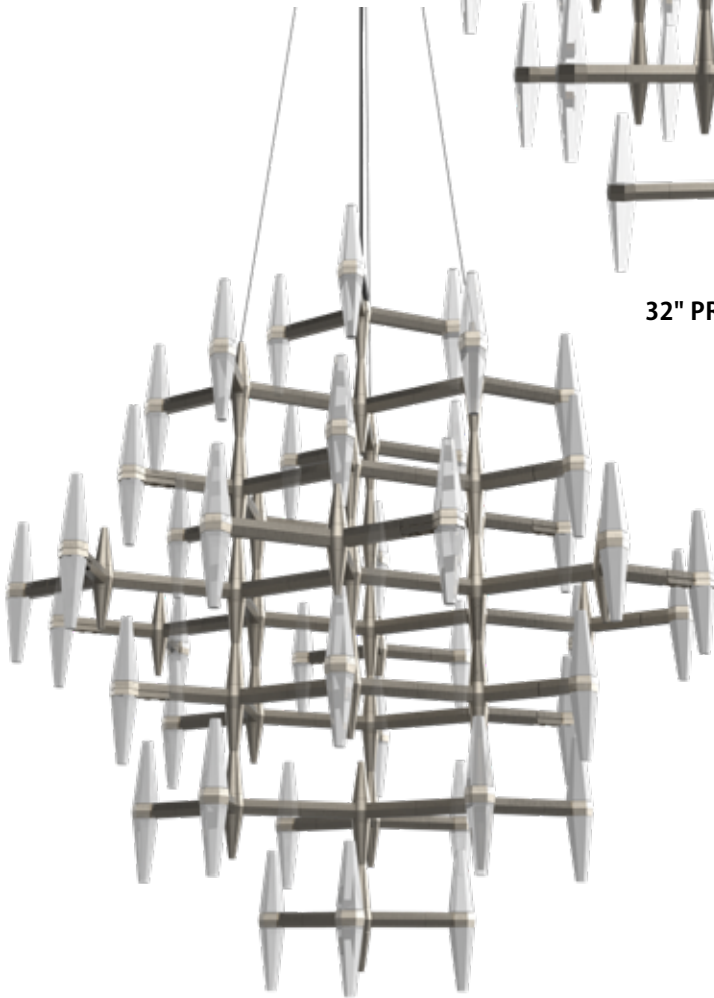

43" PRISM 7-TIER

Prism is a modern, geometric execution of the traditional chandelier. Optical acrylic forms are cut on sharp angles to provide visual excitement and pleasing ambient LED up- and down-light throughout a space. Available in a variety of horizontal and vertical sizes.

PRISM MULTI-TIER CHANDELIER

Features


- Available in Satin Nickel finish
- Faceted frosted acrylic light guides
- Includes 12' electrical wire length
- Adjustable 12' of aircraft suspension wire (42" length adjustable stem kit on select sizes)
- Replaceable light sources
- Driver located in canopy housing
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120-277VAC 50/60Hz
- Dimming: TRIAC, ELV or 0-10V dimmable
- For recommended dimmers and downloadable IES & LM79 files see Blackjacklighting.com

Custom

- Upgradable to 4000K/ 90 CRI
- Extension stems available for 28" Prism (see below)

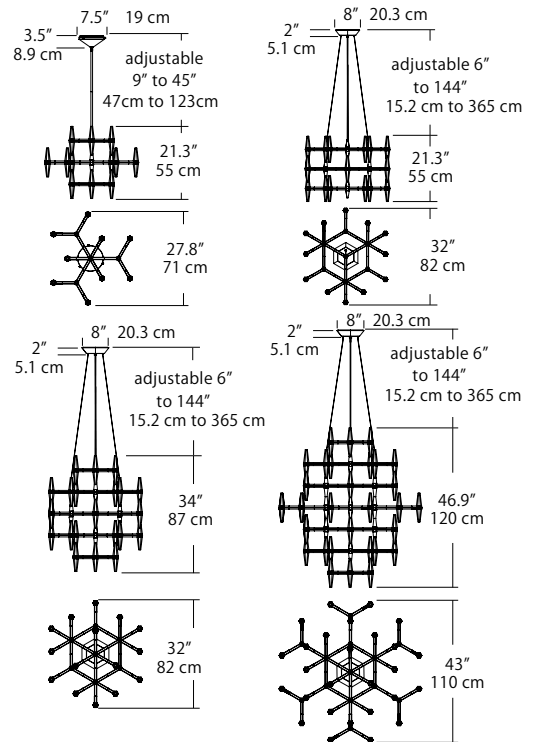

28" PRISM 3-TIER

Model No. PSM -283-SN-27U-30K

Fixture Wattage: 24 Watts

Fixture Output: 1400 Lumens

32" PRISM 3-TIER

Model No. PSM -323-SN-27U-30K

Fixture Wattage: 36 Watts

Fixture Output: 2100 Lumens

32" PRISM 5-TIER

Model No. PSM -325-SN-27U-30K

Fixture Wattage: 48 Watts

Fixture Output: 2800 Lumens

43" PRISM 7-TIER

Model No. PSM -437-SN-27U-30K

Fixture Wattage: 84 Watts

Fixture Output: 4900 Lumens

OPTIONAL ACCESSORIES

24" Extension Stem

Model No: 92002-SN

43" Prism Single-Tier
Satin Nickel



PRISM SINGLE-TIER CHANDELIER

Features

- Available in Satin Nickel finish
- Faceted frosted acrylic light guides
- Includes 12' electrical wire length
- Adjustable 12' of aircraft suspension wire (42" length adjustable stem kit on select sizes)
- All other pendants include 12' of aircraft suspension wire and 12' of electrical wire
- Replaceable light sources
- Driver located in canopy housing
- Damp location rated


Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120-277VAC 50/60Hz
- Dimming: TRIAC, ELV or 0-10V dimmable
- For recommended dimmers and downloadable IES & LM79 files see Blackjacklighting.com

Custom

- Upgradable to 4000K / 90CRI
- Extension stems can be purchased for 28" Prism (see below)

32" PRISM SINGLE-TIER

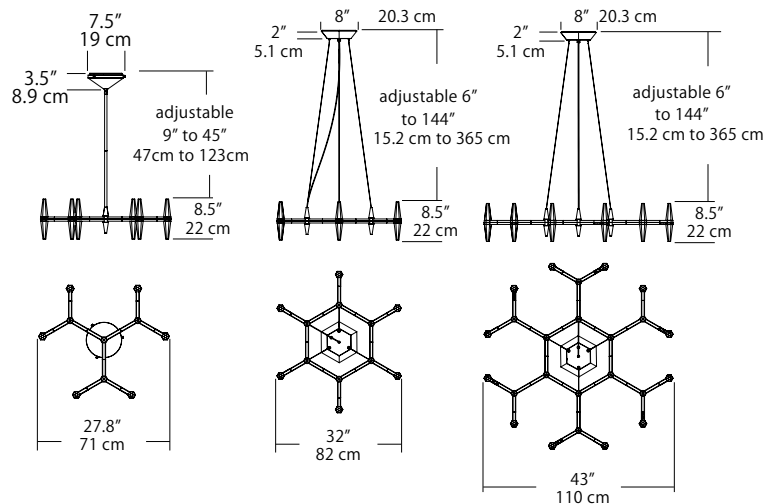

28" PRISM SINGLE TIER

Model No. PSM-281-SN-27U-30K

Fixture Wattage: 12 Watts

Fixture Output: 700 Lumens

32" PRISM SINGLE TIER

Model No. PSM-321-SN-27U-30K

Fixture Wattage: 12 Watts

Fixture Output: 700 Lumens

43" PRISM SINGLE TIER

Model No. PSM-431-SN-27U-30K

Fixture Wattage: 24 Watts

Fixture Output: 1400 Lumens

OPTIONAL ACCESSORIES

24" Extension Stem

Model No: 92002-24-SN (Satin Nickel)

Prism is a modern, geometric execution of the traditional chandelier. Optical acrylic forms are cut on sharp angles to provide visual excitement and pleasing ambient LED up- and down-light throughout a space. Available in a variety of horizontal and vertical sizes.

32" Facets
Polished Chrome



FACETS CHANDELIER

Features


- Available in Polished Chrome finish
- Includes 42" length adjustable stem kit and 12' wire length
- Fixture can accept up to four extension stem sections for a maximum stem length of 11'6"
- Driver located in canopy housing
- Hang straight swivel attaches to top of stem
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120-277VAC 50/60Hz
- Dimming: TRIAC/ ELV or 0-10V dimmable
- For recommended dimmers and downloadable IES & LM79 files see Blackjacklighting.com

Custom

- See below for extension stems and sloped ceiling swivel
- Consult factory for color temperature upgrades

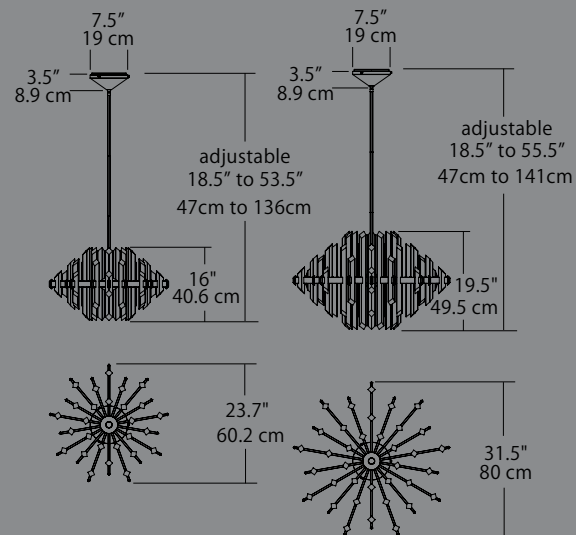

24" FACETS CHANDELIER

Model No. FAC-24P-PC-27U-30K

(Polished Chrome)

Fixture Wattage: 29 Watts

Fixture Output: 1155 Lumens

32" FACETS CHANDELIER

Model No. FAC-32P-PC-27U-30K

(Polished Chrome)

Fixture Wattage: 45 Watts

Fixture Output: 1740 Lumens



OPTIONAL ACCESSORIES

24" Extension Stem

Model No: 92002-24- PC (Polished Chrome)

Sloped Ceiling Swivel (0-90 degrees)

Model No: 92004-PC (Polished Chrome)

Sparkling chandeliers are a lighting tradition. Executed in optical acrylic, Facets Chandelier uses integrated LED light sources that make the most of its sharp angles and diamond-shaped frosted tips.

45" Facets Oval
Polished Chrome



FACETS CHANDELIER

Features



- Available in Polished Chrome finish
- Includes 42" length adjustable stem kit and 12' wire length
- Fixture can accept up to four extension stem sections for a maximum stem length of 11'6"
- Driver located in canopy housing
- Hang straight swivel attaches to top of stem
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120-277VAC 50/60Hz
- Dimming: TRIAC/ ELV or 0-10V dimmable
- For recommended dimmers and downloadable IES & LM79 files see Blackjacklighting.com

Custom

- See below for extension stems and sloped ceiling swivel
- Consult factory for color temperature upgrades

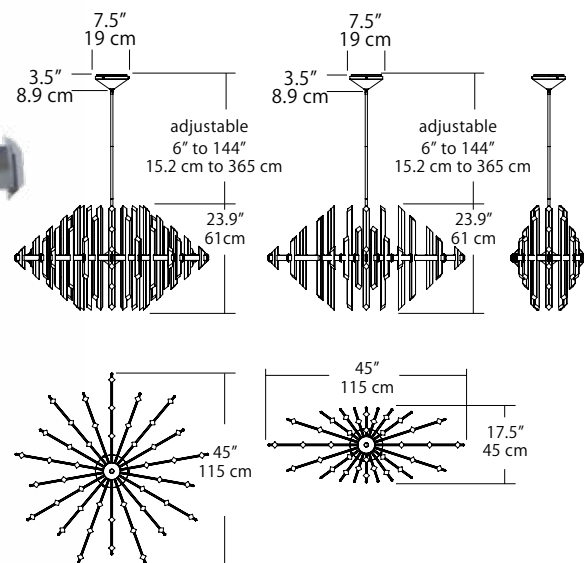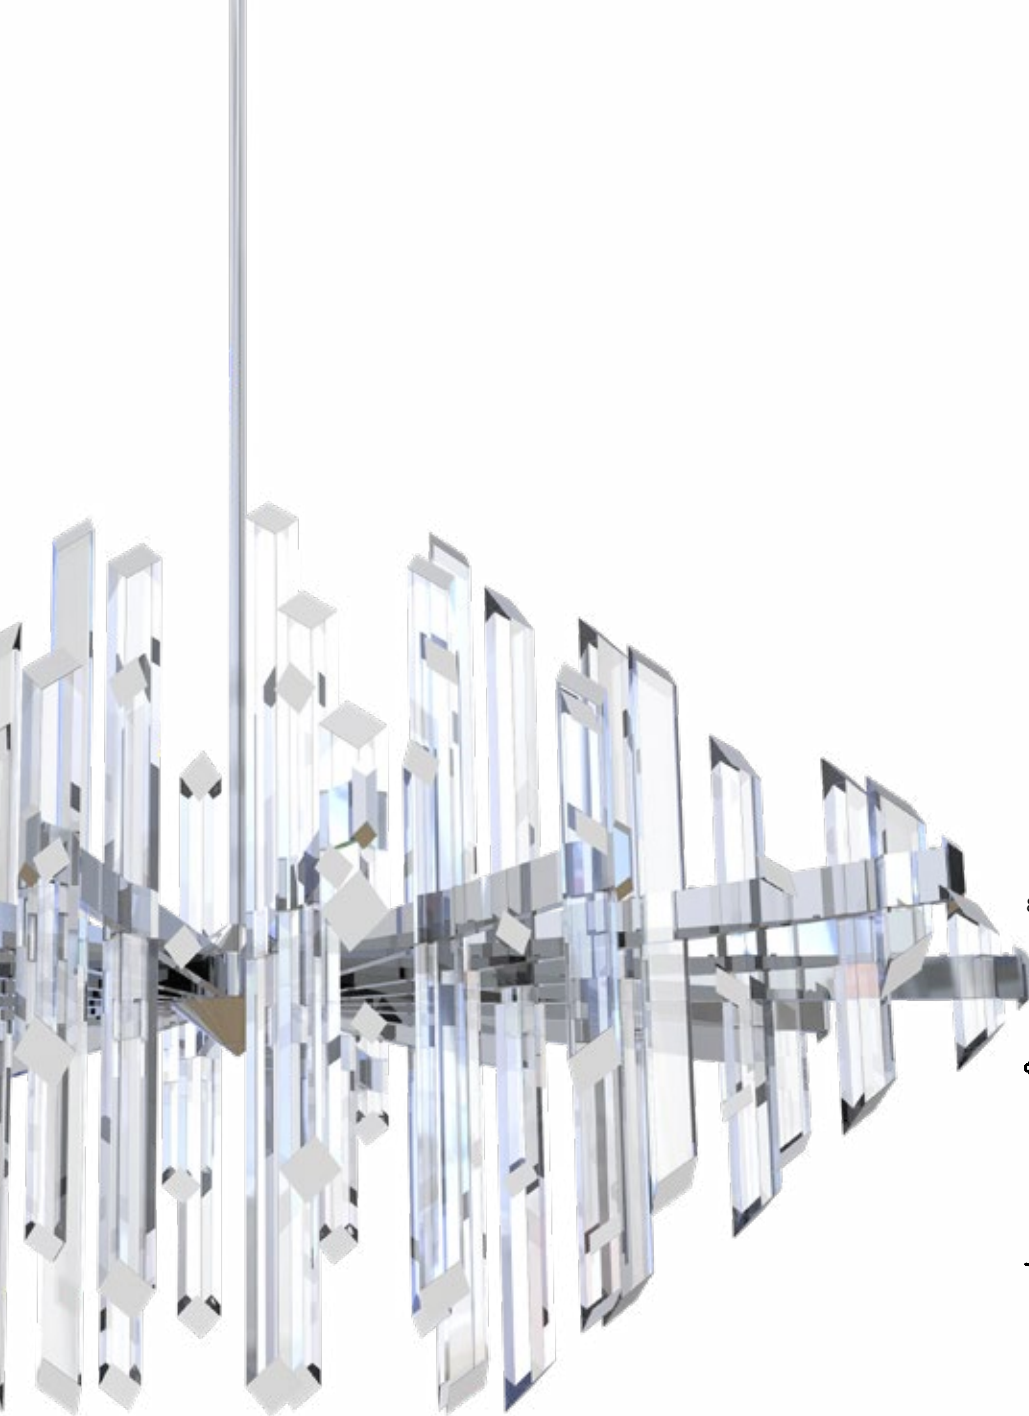

45" FACETS ROUND CHANDELIER

Model No. FAC-45P-PC 27U-30K

(Polished Chrome)

Fixture Wattage: 26 Watts

Fixture Output: 1660 Lumens

45" FACETS OVAL CHANDELIER

Model No. FAC-45A-PC 27U-30K

(Polished Chrome)

Fixture Wattage: 48 Watts

Fixture Output: 3000 Lumens



OPTIONAL ACCESSORIES

24" Extension Stem

Model No: 92002-24-PC (Polished Chrome)


Sloped Ceiling Swivel (0-90 degree)

Model No: 92004-PC (Polished Chrome)

Sparkling chandeliers are a lighting tradition. Executed in optical acrylic, Facets Chandelier uses integrated LED light sources that make the most of its sharp angles and diamond-shaped frosted tips.

32" Geodome
Black with White Interior



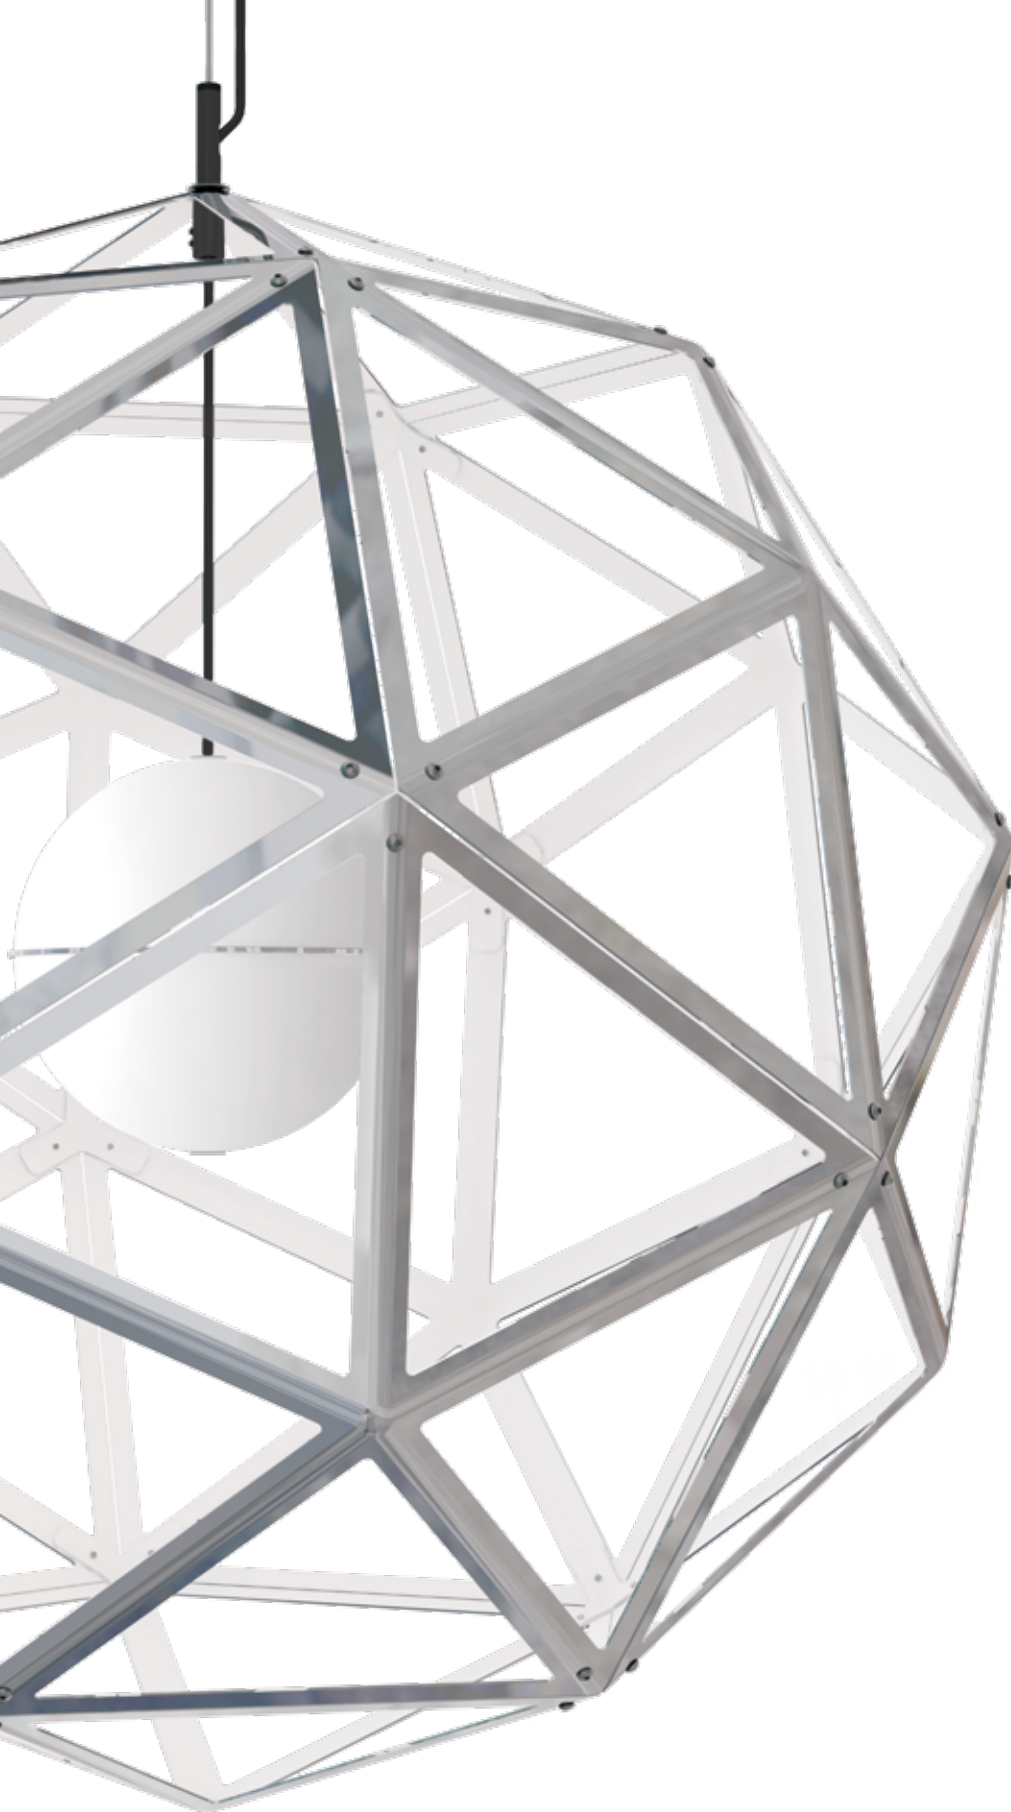

GEODOME PENDANT

Features


- Available in contrasting polished chrome with white interior or black with white interior
- Stainless steel construction
- Available with standard E26 socket (lamp not provided) or integrated LED light kit
- Suspends 12' from the ceiling with a black power cord and an aircraft suspension cable
- Comes comes knocked down with 12 stamped stainless steel sections that screw together in the field
- Damp location rated

Specifications

- Color Rendering Index: (90CRI for LED light kit)
- LED Color Temperature: (3000K for LED light kit)
- Input Voltage: 120-220VAC 50/60Hz (120-277VAC for integrated LED light kit option)
- Dimming: No dimming options for E26 socket.
- Integrated LED light kit comes with universal dimming (TRIAC/ ELV/ 0-10V)
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Available integrated LED light kit; includes 120-277VAC driver with universal Dimming (TRIAC/ ELV/0-10V)
- Integrated LED light kit (standard in 3000K) upgradable to 4000K/ 90CRI

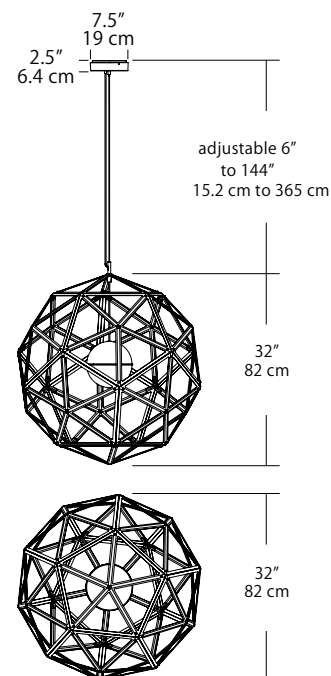

32" GEODOME PENDANT

Model No. GDM-32P-PW-12E-NAK
(Polished Chrome Exterior/ White Interior)
E26 Screw-In socket

Model No. GDM-32P-PW-27U-30K
(Polished Chrome Exterior/ White Interior)
Integrated LED Light Kit

Model No. GDM-32P-BW-12E-NAK
(Black Exterior/ White Interior)
E26 Screw-In socket


Model No. GDM-32P-BW-27U-30K
(Black Exterior/ White Interior)
Integrated LED Light Kit


Integrated LED Light Kit Specifications

Fixture Wattage: 42 Watts
Fixture Output: 2500 Lumens

Making the most of what isn't there is what Geodome is all about. Constructed negative space gives a nod to the traditional shade form whilst making a statement all its own. Illumination via screw-in bulb or integrated, highly-efficient LEDs.

25" Aero
Matte Black with Brushed Gold Interior

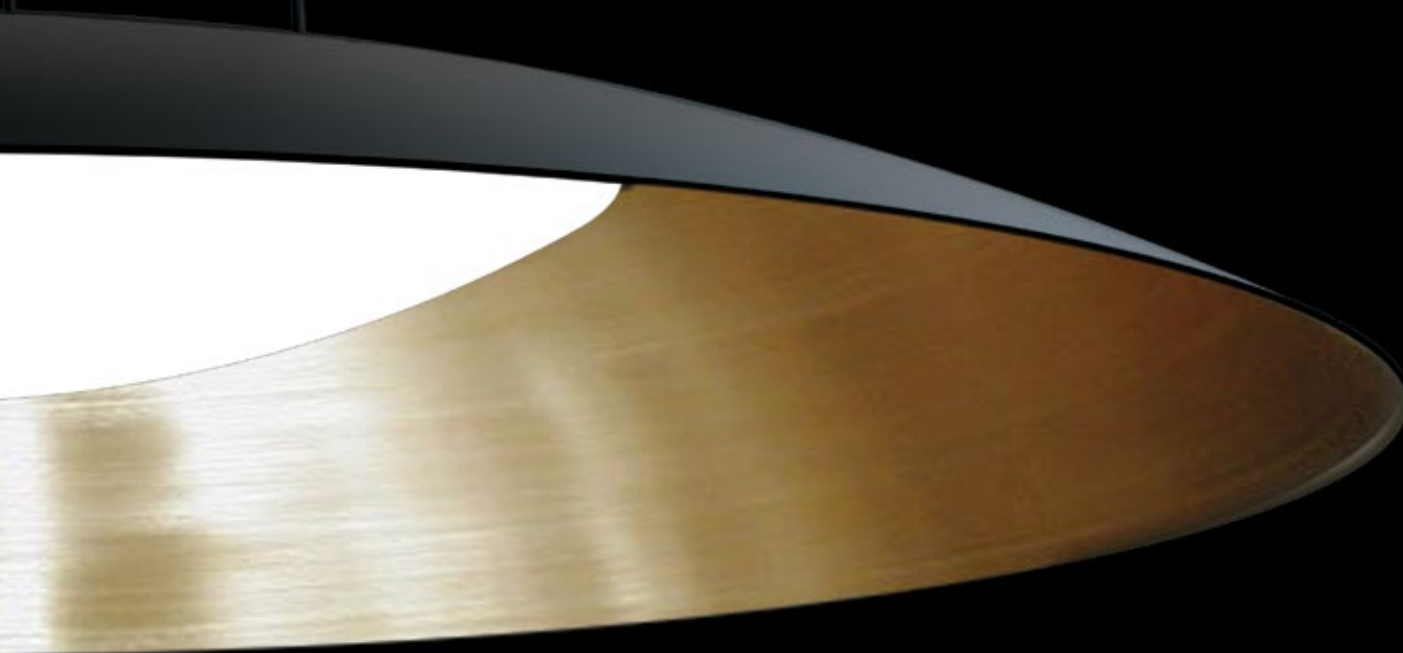

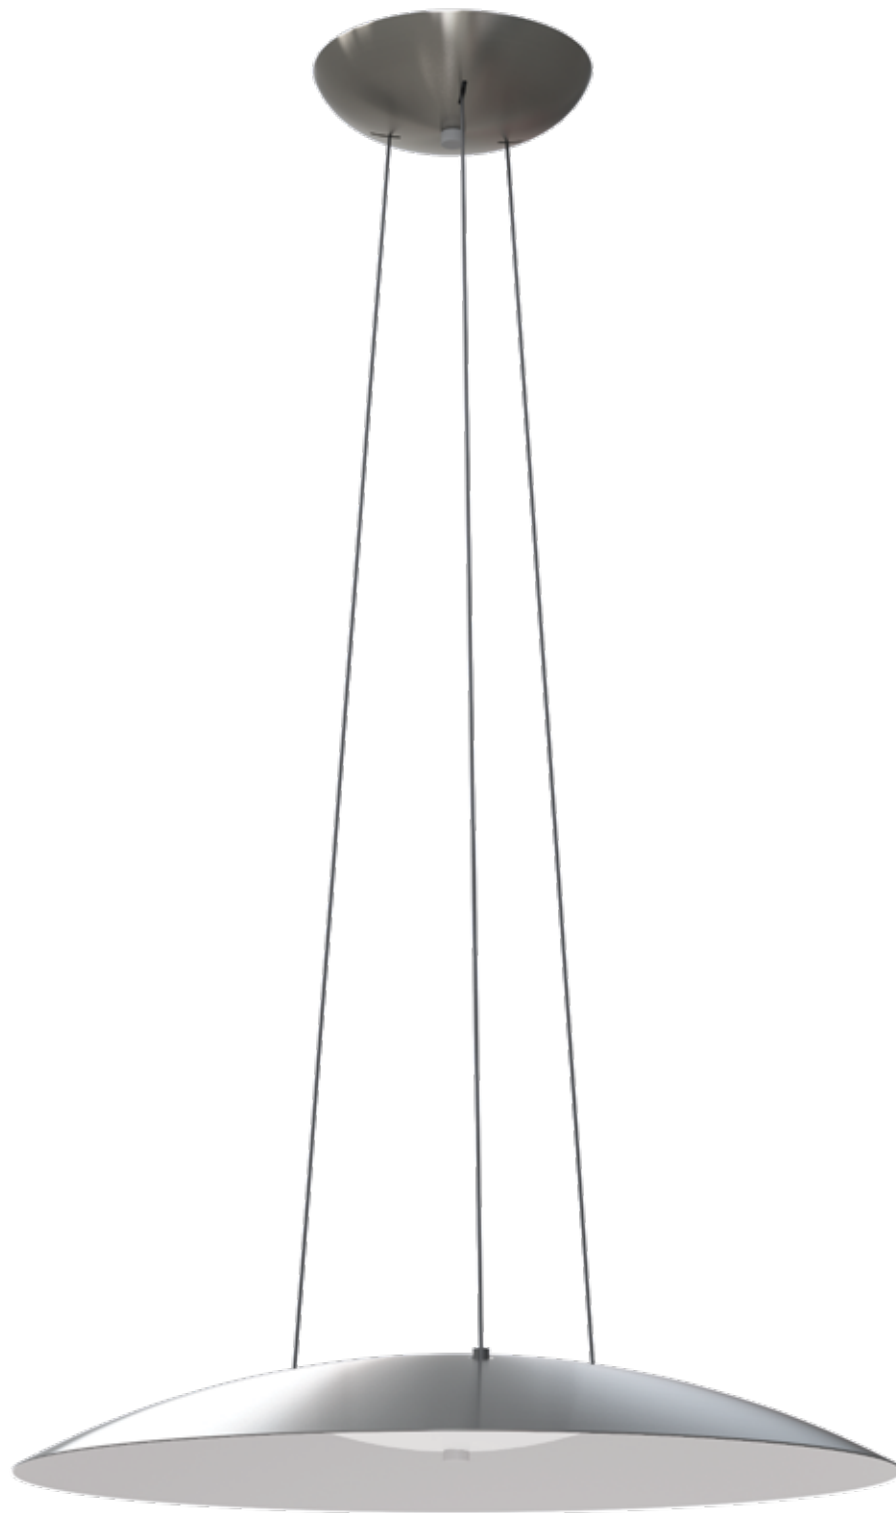

Familiar shape, striking style. Aero's sleek lines, slim profile and array of design options deliver modern style and a sophisticated aesthetic.

AERO PENDANT

Features


- Available in Black (brushed gold interior) and Satin Nickel (white interior)
- Three adjustable 72' black support cables
- Spun steel shade with powder coated finish
- Replaceable light source
- Frosted glass diffuser
- Driver located in canopy housing
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120-277VAC 50/60Hz
- Dimming: TRIAC, ELV or 0-10V dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to 4000K/ 90CRI

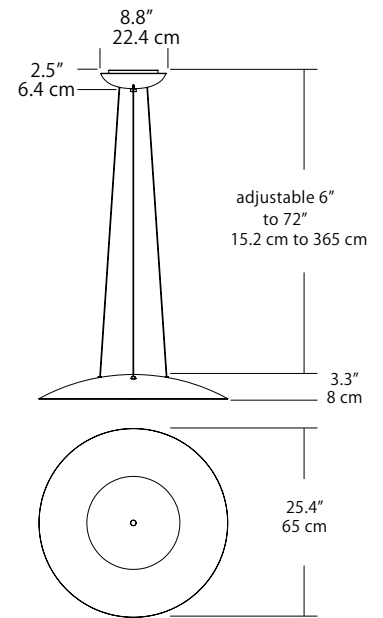

25" AERO PENDANT

Model No. ARO-25P-BG-27U-30K

(Black with brushed gold interior)

Fixture Wattage: 26.7 Watts

Fixture Output: 1895 Lumens

Model No. ARO-25P-SW-27U-30K

(Satin nickel with white interior)

Fixture Wattage: 26.7 Watts

Fixture Output: 1895 Lumens



38" Spectra Linear
Autumn Reds



Aqua Blues



Autumn Reds



Spring Greens

SPECTRA ROUND AND LINEAR PENDANT

Features

- Available in Matte Black or Polished Chrome (special order)
- Individual pendants suspended from coaxial cable that adjusts from 9" to 144"
- Cables are field-adjustable; cutting and splicing are not required
- Driver located in canopy housing
- Replaceable light source
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 100-277VAC 50/60Hz
- Dimming: TRIAC, ELV or 0-10V dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com


Custom

- Available in Polished Chrome finish
- Upgradable to 4000K/ 90CRI
- Linear canopy gangable/joinable on long or short side




10" Round with Aqua Blues

38" Linear Pendant / 18 light

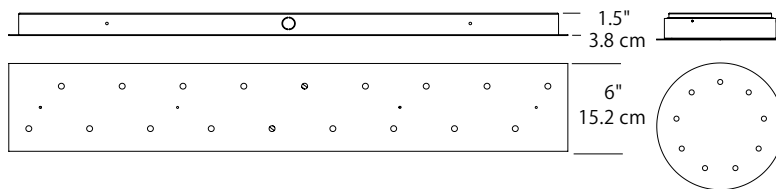

10" Round

38" Linear Pendant / 10 light

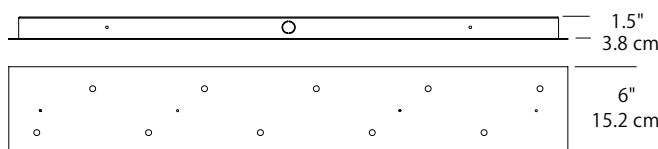

Spectra adds a splash of colorful interest to any room. Made from a solid saturated color resin ring that displays a beautiful mixed bouquet of colors from the side but directs useful white light to the surface below

38" SPECTRA LINEAR PENDANT/ 18 Light

- Model No. SPC-3818-BL-27U-AR-30K**
(Matte Black with Autumn Reds Spectrum)
- Model No. SPC-3818-BL-27U-AB-30K**
(Matte Black with Aqua Blues Spectrum)
- Model No. SPC-3818-BL-27U-SG-30K**
(Matte Black with Spring Greens Spectrum)

Fixture Wattage: 30 Watts
Fixture Output: 1948 Lumens

38" SPECTRA LINEAR PENDANT/ 10 Light

- Model No. SPC-3810-BL-27U-AR-30K**
(Matte Black with Autumn Reds Spectrum)
- Model No. SPC-3810-BL-27U-AB-30K**
(Matte Black with Aqua Blues Spectrum)
- Model No. SPC-3810-BL-27U-SG-30K**
(Matte Black with Spring Greens Spectrum)

Fixture Wattage: 18 Watts
Fixture Output: 1045 Lumens

10" SPECTRA ROUND PENDANT/ 9 Light

- Model No. SPC-1009-BL-27U-AR-30K**
(Matte Black with Autumn Reds Spectrum)
- Model No. SPC-1009-BL-27U-AB-30K**
(Matte Black with Aqua Blues Spectrum)
- Model No. SPC-1009-BL-27U-SG-30K**
(Matte Black with Spring Greens Spectrum)

Fixture Wattage: 16 Watts
Fixture Output: 941 Lumens



OPTIONAL JOINER ASSEMBLY

- Model No. 95062**
(Black)

24" Circuit
Matte Black





CIRCUIT PENDANT

Features


- Available in: Matte Black or Matte White exterior with white diffuser
- Adjustable (up to 72") aircraft support cables with separate electrical cord
- Steel exterior shade, acrylic diffuser
- Driver located in canopy housing
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120-277VAC 50/60Hz
- Dimming: TRIAC, ELV, or 0-10V dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Consult Blackjack Lighting for custom upgrades

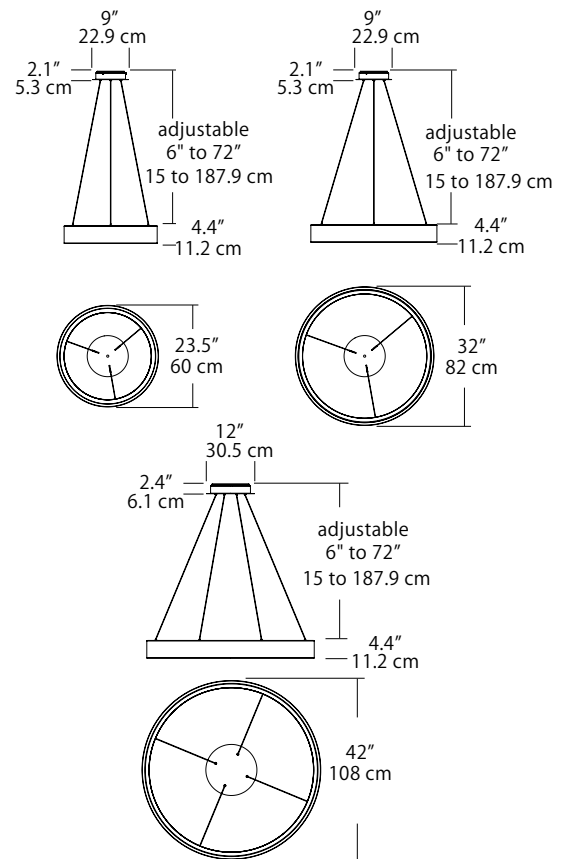

The most recognizable, familiar and pleasing of geometric forms – the circle. Three size variations and two finish options augment Circuit's heightened profile. Integrated LEDs around the circuit deliver powerful and pleasing ambient illumination in a variety of environments.

CIRCUIT PENDANT

Model No. CIR-43P-WH-27U-30K (White)
Model No. CIR-43P-BL-27U-30K (Black)
 Fixture Wattage: 120 Watts
 Fixture Output: 7680 Lumens

Model No. CIR-32P-WH-27U-30K (White)
Model No. CIR-32P-BL-27U-30K (Black)
 Fixture Wattage: 92 Watts
 Fixture Output: 4680 Lumens

Model No. CIR-24P-WH-27U-30K (White)
Model No. CIR-24P-BL-27U-30K (Black)
 Fixture Wattage: 42 Watts
 Fixture Output: 3280 Lumens



**Black with Brushed
Copper Interior**



**White with
Gold Interior**

KONA PENDANT

Features


- White Shade with Gold interior comes with silver cable
- Polished Chrome socket and canopy
- Matte Black shades with Brushed Copper interior comes with black cable
- Matte Black socket and canopy
- Suspends from adjustable 144" cable
- No cutting or splicing required
- Excess cable stays coiled inside aluminum canopy
- Ships with approx. 8' of exposed cable
- Driver located inside canopy
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120-277VAC 50/60Hz
- Dimming: TRIAC, ELV or 0-10V dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to 4000K/ 90CRI

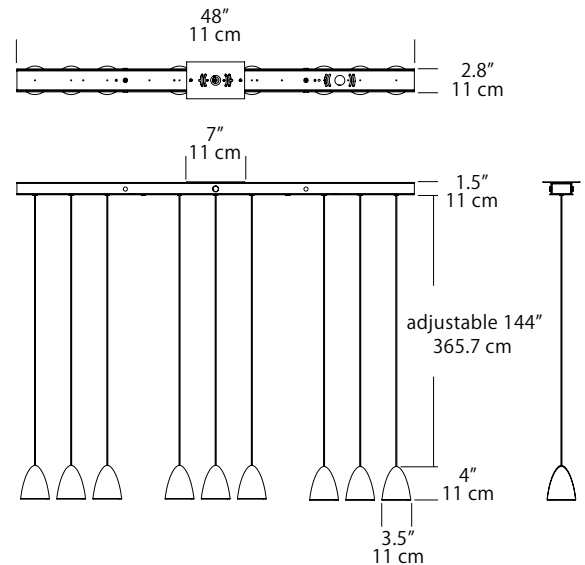

CUTTING
SPLICING
**NOT
REQUIRED**

48" KONA LINEAR PENDANT

Model No. KNA-48P-BL-27U-30K

(Black with brushed copper interior)

Fixture Wattage: 20 Watts

Fixture Output: 1530 Lumens

Model No. KNA-48P-WH-27U-30K

(Whitel with gold interior)

Fixture Wattage: 20 Watts

Fixture Output: 1530 Lumens


Kona brings a geometric elegance to any island or long table. Multiple small bullet shades evenly light up the surfaces below



27" Iridium
Polished Chrome



Available Finishes



Polished
Chrome



Etched
Gold



IRIDIUM PENDANT

Features


- Available in Polished Chrome or Etched Gold finish
- Diffused illumination fills the room with pleasing ambient light
- Includes 42" length adjustable stem kit and 12' wire length
- Fixture can accept up to four extension stem sections for a maximum stem length of 11'6"
- Driver located in canopy housing
- Hang straight swivel attaches to top of stem
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120-277VAC 50/60Hz
- Dimming: 27"= TRIAC/ ELV and 0-10v dimming
36"= 0-10v dimming
- For recommended dimmers and downloadable IES & LM79 files see Blackjacklighting.com

Custom

- Consult Blackjack Lighting for custom upgrades

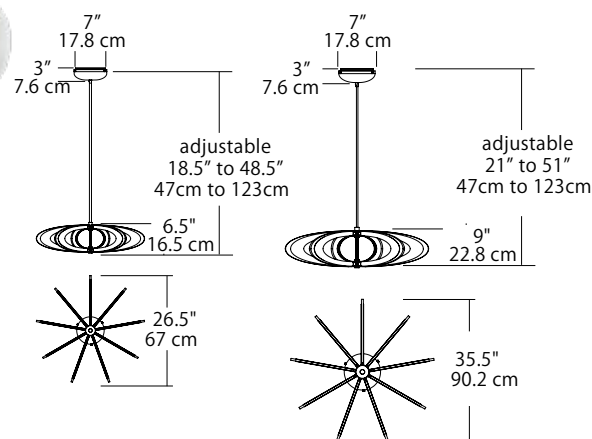

27" IRIDIUM PENDANT

Model No. IRD-27C-EG-27U-30K
(Etched Gold)

Model No. IRD-27C-PC-27U-30K
(Polished Chrome)

Fixture Wattage: 42 Watts
Fixture Output: 2100 Lumens

36" IRIDIUM PENDANT

Model No. IRD-36C-PC-27Z-30K
(Polished Chrome)

Fixture Wattage: 60 Watts
Fixture Output: 3200 Lumens



OPTIONAL ACCESSORIES

24" Extension Stem

Model No: 92002-24- EG (Etched Gold)

Model No: 92002-24- PC (Polished Chrome)

Sloped Ceiling Swivel (0-90 degrees)

Model No: 92004-EG (Etched Gold)

Model No: 92004-PC (Polished Chrome)



Winner of the 2017 Lighting For Tomorrow Award in the Decorative Lighting category. Named one of the "30 Most Innovative Products" for 2018 by Beautiful Kitchens & Baths magazine editors.

27" Dot
Polished Chrome



Available Finishes



Polished
Chrome

Etched
Gold



Each of Dot's 24 arms ends in a shallow reflector with its own center metal dot. A ring of LEDs behind the dots bounces light off the reflector's interior surface evenly and in all directions, without shadows or glare.

BLACKJACK®

DOT CHANDELIER

Features


- Available in Etched Gold and Polished Chrome
- Includes 42" length adjustable stem kit and 12' wire length
- Fixture can accept up to four 24" extension stem sections for a maximum stem length: 11'6"
- Replaceable light source
- Driver located in canopy housing
- Hang straight swivel
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120-277VAC 50/60Hz
- Dimming: 27"= TRIAC dimmable
36"= TRIAC/ ELV and 0-10V dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Consult Blackjack Lighting for custom upgrades

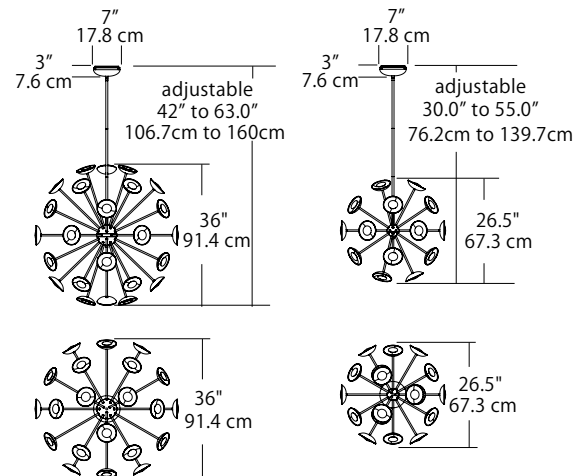

27" DOT PENDANT

Model No. DOT-27C-EG-12T-30K
(Etched Gold)

Model No. DOT-27C-PC-12T-30K
(Polished Chrome)

Fixture Wattage: 40 Watts
Fixture Output: 2400 Lumens

36" DOT PENDANT

Model No. DOT-36C-EG-27U-30K
(Etched Gold)

Model No. DOT-36C-PC-27U-30K
(Polished Chrome)

Fixture Wattage: 60 Watts
Fixture Output: 3600 Lumens



OPTIONAL ACCESSORIES

24" Extension Stem

Model No. 92002-24-EG (Etched Gold)

Model No. 92002-24-PC (Polished Chrome)

Sloped Ceiling Swivel (0-90 degrees)

Model No. 92004-EG (Etched Gold)

Model No. 92004-PC (Polished Chrome)

29" Starburst
Satin Nickel



29" Starburst
Brushed Brass





29" Starburst
Polished Chrome

US Patent D731,105 S

Starburst works well in a variety of applications once dominated by incandescent fixtures. Select from three finishes. Opt for an upgrade to 4000K light sources. Here's a design that looks outstanding and performs brilliantly whether on or off.

STARBURST CHANDELIER

Features


- Available in three different finishes.
- Diffused illumination fills the room with pleasing ambient light
- Includes 42" length extension stem kit and 12' wire length
- Fixture can accept up to four additional stem sections for a maximum stem length of 11'6"
- Driver located in canopy housing
- Hang straight swivel attaches to top of stem
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120-277 VAC 50/60Hz
- Dimming: TRIAC/ ELV and 0-10v dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Consult Blackjack Lighting for custom upgrades
- Upgradable to 4000K/ 90CRI

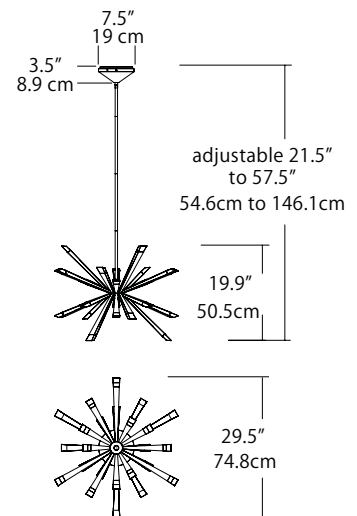

29" STARBURST CHANDELIER

Model No. STB-29C-BB-27U-30K

(Brushed Brass)

Model No. STB-29C-PC-27U-30K

(Polished Chrome)

Model No. STB-29C-SN-27U-30K

(Satin Nickel)

Fixture Wattage: 29 Watts

Fixture Output: 2018 Lumens



OPTIONAL ACCESSORIES

24" Extension Stem

Model No: 92002-24- ☐ ☐

Sloped Ceiling Swivel (0-90 degrees)

Model No: 92004- ☐ ☐

Finish Options

PC (Polished Chrome)


BB (Brushed Brass)

SN (Satin Nickel)


29" Triple Starburst
Polished Chrome



Available Finishes



Brushed
Brass



Polished
Chrome



Satin
Nickel

TRIPLE STARBURST CHANDELIER

A triple canopy option for the Starburst Pendant creates a powerful lighting statement. Here's a simple solution when large scale, dramatic design and an abundance of bright illumination are required.

Features


- Available in three different finishes
- Diffused illumination fills the room with light
- Includes 42" length adjustable stem kit and 12' wire length
- Fixture can accept up to four extension stem sections for a maximum stem length of 11'6" for each pendant
- Driver located in canopy housing
- Hang straight swivel attaches to top of stem
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120-277VAC 50/60Hz
- Dimming: TRIAC/ ELV and 0-10v dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Consult ordering guide below for custom options
- Upgradable to 4000K/ 90CRI

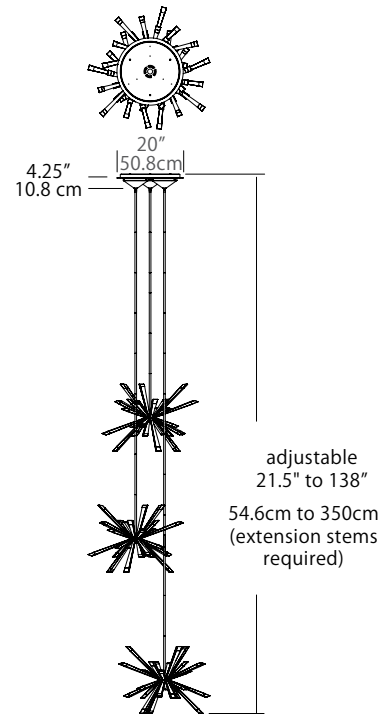

29" TRIPLE STARBURST CHANDELIER

Model No. STB-T29-BB-27U-30K

(Brushed Brass)

Model No. STB-T29-PC-27U-30K

(Polished Chrome)

Model No. STB-T29-SN-27U-30K

(Satin Nickel)

Fixture Wattage: 87 Watts

Fixture Output: 6720 Lumens



OPTIONAL ACCESSORIES

24" Extension Stem

Model No: 92002-24- ☐ ☐

39" Extension Stem

Model No: 92002-39- ☐ ☐

Finish Options

PC (Polished Chrome)

BB (Brushed Brass)

SN (Satin Nickel)

SPECIAL
ORDER

BLACKJACK®

40" Starburst
Polished Chrome



STARBURST LARGE CHANDELIER

Features

- Available in Polished Chrome finish
- Diffused illumination fills the room with light
- Includes 42" length adjustable stem kit and 12' wire length
- Fixture can accept up to four extension stem sections for a maximum stem length up to 11'6"
- Driver located in canopy housing
- Hang straight swivel attaches to top of stem
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120-277VAC 50/60Hz
- Dimming: TRIAC/ ELV and 0-10V dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com


Custom

- Consult Blackjack Lighting for custom upgrades
- Upgradable to 4000K/ 90CRI



US Patent D731,105 S

Available in Polished Chrome, our Starburst 40" Chandelier brings dazzling beauty to very large spaces.

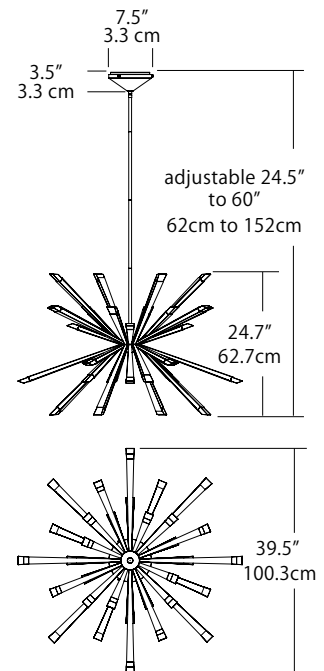

40" STARBURST CHANDELIER

Model No. STB-40C-PC-27U-30K

(Polished Chrome)

Fixture Wattage: 40 Watts

Fixture Output: 2900 Lumens



OPTIONAL ACCESSORIES

24" Extension Stem

Model No: 92002-24-PC

39" Extension Stem

Model No: 92002-39-PC

Sloped Ceiling Swivel (0-90 degrees)

Model No: 92004-PC

26" Wedge
Polished Chrome



WEDGE PENDANT

Features


- Constructed from die-cast aluminum with Polished Chrome finish
- Adjustable fabric-wrapped black cord suspends fixture 10" to 144" from ceiling
- Replaceable light source
- Driver located in canopy housing
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120-277VAC 50/60Hz
- Dimming: TRIAC/ ELV and 0-10V dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Consult Blackjack Lighting for custom upgrades

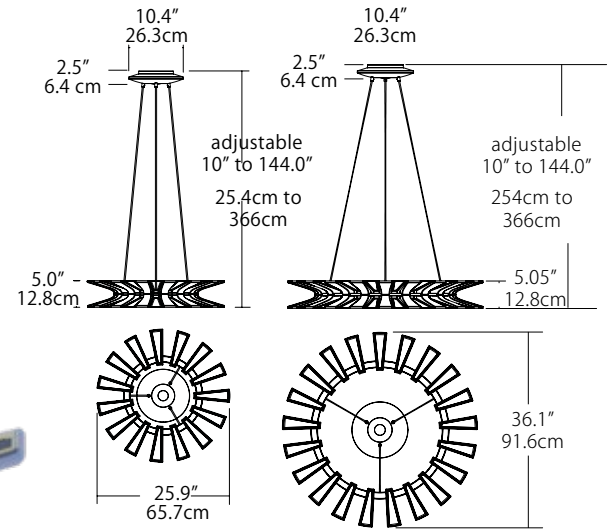

26" WEDGE PENDANT

Model No. WEG-26C-PC-27U-30K

(Polished Chrome)

Fixture Wattage: 34 Watts

Fixture Output: 2380 Lumens

36" WEDGE PENDANT

Model No. WEG-36C-PC-27U-30K

(Polished Chrome)

Fixture Wattage: 48 Watts

Fixture Output: 2811 Lumens



Award-winning Wedge Pendant fills a room with up and down light from a double row of trapezoidal forms attached to a center ring. Available in two sizes.

23" Swirl
Satin Nickel



16" Swirl
Satin Nickel



SWIRL PENDANT

Features


- Stamped and fabricated steel construction with Satin Nickel finish
- Diffused illumination evenly fills the room with light
- Includes 42" length adjustable stem kit and 12' wire length
- Fixture can accept up to four extension stem sections for a maximum stem length of 11'6"
- Replaceable light source
- Driver located in canopy housing
- Hang straight swivel attaches to top of stem
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120-277VAC 50/60Hz
- Dimming: 16"/23"= TRIAC/ELV and 0-10V dimmable
32"= 0-10V dimming
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Consult Blackjack Lighting for custom upgrades

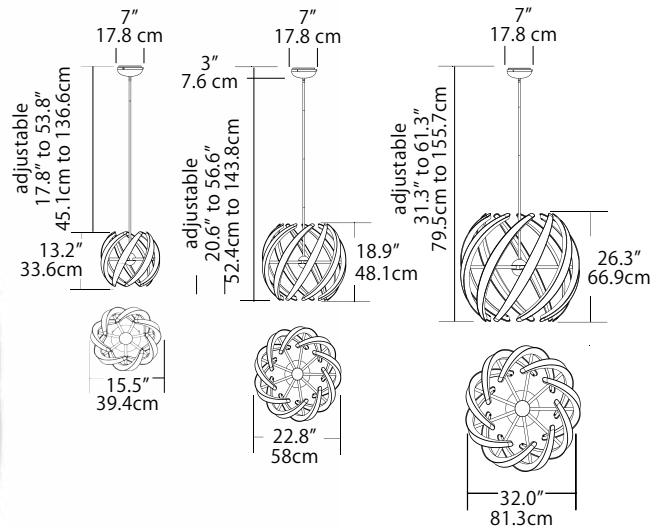

16" SWIRL PENDANT

Model No. SWL-16P-SN-27U-30K
(Satin Nickel)

Fixture Wattage: 24 Watts
Fixture Output: 1969 Lumens

23" SWIRL PENDANT

Model No. SWL-23P-SN-27U-30K
(Satin Nickel)

Fixture Wattage: 38 Watts
Fixture Output: 3577 Lumens

32" SWIRL PENDANT

Model No. SWL-32P-SN-27Z-30K
(Satin Nickel)

Fixture Wattage: 92 Watts
Fixture Output: 7043 Lumens



OPTIONAL ACCESSORIES

24" Extension Stem

Model No. 92001-24-SN
(Satin Nickel)

Sloped Ceiling Swivel (0-90 degrees)

Model No. 92004-SN
(Satin Nickel)

US Patent Number D730,562 S



Winner of three major design awards, patented Swirl Pendant exemplifies Blackjack's luminous form approach to LED lighting. Thoroughly tested in the lab and field, Swirl has significantly more performance than the incandescent or fluorescent fixture it replaces.

BLACKJACK®

32" Swirl RGBW
Satin Nickel



SWIRL RGBW PENDANT

Features

- Stamped steel with plated Satin Nickel finish
- Includes 42" maximum length adjustable stem kit
- Fixture can be ordered with extension stem
- Available in three sizes. For fixture dimensions see pg. 41

Specifications

- RGBW color-controllable Swirl Pendant enables infinite color combinations and white light
- Lighting features can be manually controlled or use the many programmed color changing routines available pre-loaded in the controller

Custom

- **Wireless WIFI controller** allows control of all color changing features through a cell phone and other devices with downloadable app (IOS and Android OS). (Requires installer to remote mount the supplied driver near to the fixture canopy. Remote splice box not included)
- **Wireless hand-held controller** provides a hand-held remote controller (with wall-mounted holder) that allows control of all color changing features. (Requires installer to remote mount the supplied LED driver near to fixture canopy. Remote splice box not included)
- **Hardwired wall-mounted controller** provides an easy to use touch control panel that operates all color changing features. Comes with wall-mounted multi-function color control panel, 12' of five-conductor cable and terminal block. (Requires installer to remote mount the supplied LED driver near to control panel location. Remote splice box not included)
- **Hardwired DMX controller** provides a cable connection to most DMX color changing controllers. Includes 12' of five-conductor cable and terminal block for connection to cable from remote mounted DMX controller (Requires installer to remote mount the supplied LED driver near DMX controller. Remote splice box not included)

16" RGBW COLOR CHANGING SWIRL

Model No: SWL-16P-SN-RGB-☐☐ **
(Satin Nickel)
Fixture Wattage: 55W

**SPECIAL
ORDER**

23" RGBW COLOR CHANGING SWIRL

Model No: SWL-23P-SN-RGB-☐☐ **
(Satin Nickel)
Fixture Wattage: 95W

**SPECIAL
ORDER**

32" RGBW COLOR CHANGING SWIRL

Model No: SWL-32P-SN-RGB-☐☐ **
(Satin Nickel)
Fixture Wattage: 174W

**SPECIAL
ORDER**

Control Options **

- W1** (Wireless Wifi control)
- W2** (Wireless hand-held control)
- H1** (Hardwired wall-mount control)
- H2** (Hardwired DMX control)


OPTIONAL ACCESSORIES

24" Extension Stem

Model No: 92001-24-SN
(Satin Nickel)

Sloped Ceiling Swivel (0-90 degrees)

Model No. 92004-SN

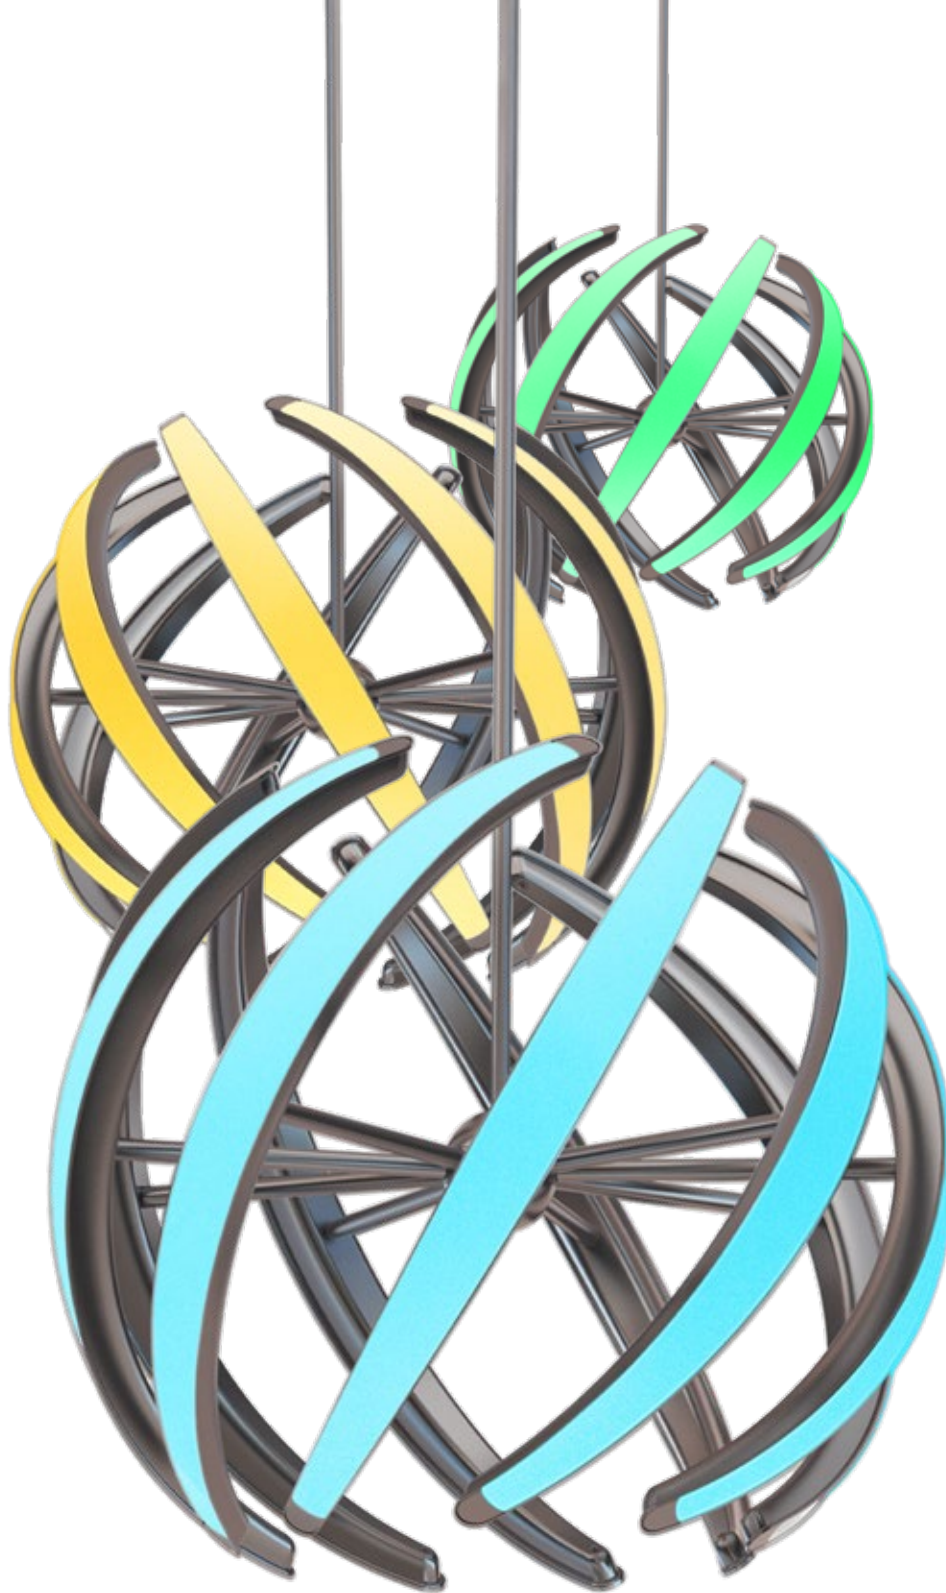

US Patent Number D730,562 S

Custom light source options and high-tech controllers completely transform our 16", 23", and 32" Swirl fixtures. Go for brighter whites, a rainbow of color or hundreds of patterns of color synchronization, sequencing, advancing, rolling and more.

21" Staxx Single Tier
Satin Nickel



STAXX PENDANT

Features

- Available in Satin Nickel finish
- Proprietary light guide materials heighten the aesthetics and evenly distribute the light
- Includes an adjustable 12' stainless steel aircraft cable suspension
- Suspension cable adjusts easily with grippers
- Driver located in canopy housing
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120VAC 50/60Hz
- Dimming: TRIAC dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom


- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)

13" STAXX SINGLE TIER PENDANT

13" STAXX THREE TIER PENDANT

21" STAXX SINGLE TIER PENDANT

Edge-lit rings in three sizes and a variety of spacers create striking modern pendants that are small, medium and tall. Standard 12' cable adjusts with grippers.

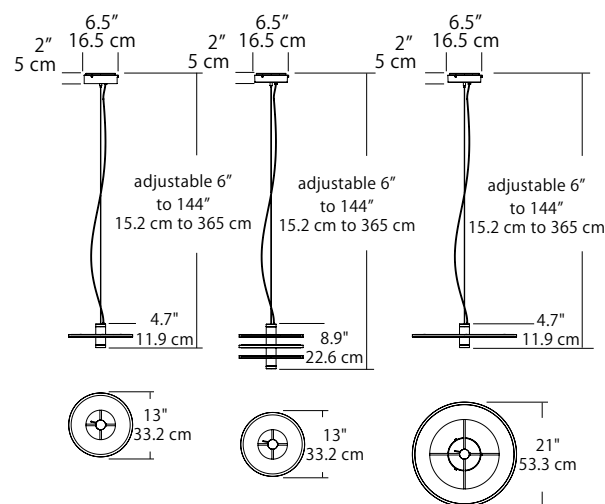

13" STAXX SINGLE TIER PENDANT

Model No. STX-13P-SN-1T-12T-30K

(Satin Nickel)

Fixture Wattage: 14 Watts

Fixture Output: 987 Lumens

13" STAXX THREE TIER PENDANT

Model No. STX-13P-SN-3T-12T-30K

(Satin Nickel)

Fixture Wattage: 42 Watts

Fixture Output: 2780 Lumens

21" STAXX SINGLE TIER PENDANT

Model No. STX-21P-SN-1T-12T-30K

(Satin Nickel)

Fixture Wattage: 29 Watts

Fixture Output: 2200 Lumens





28" Staxx Six Tier Pendant
Satin Nickel

STAXX PENDANT

Features

- Available in Satin Nickel finish
- Proprietary light guide materials heighten the aesthetics and evenly distribute the light
- Includes a double 12' stainless steel aircraft cable suspension
- Suspension cable adjusts easily with grippers
- Driver located in canopy housing
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120-277VAC 50/60Hz
- Dimming: 0-10V dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com


Custom

- Consult Blackjack Lighting for custom upgrades

28" STAXX SIX TIER PENDANT

13" STAXX FIVE TIER PENDANT

28" STAXX THREE TIER PENDANT

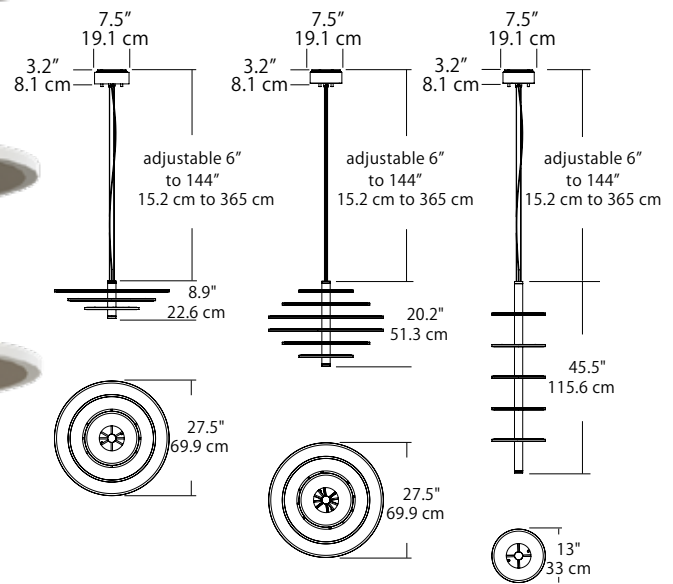

Multiple rings in various sizes and combinations make Staxx a lighting solution for many situations. Compelling shapes and a choice of scale and light output earn this lighting collection high marks.

13" STAXX FIVE TIER PENDANT

Model No. STX-13P-SN-5L-27Z-30K

(Satin Nickel)

Fixture Wattage: 62 Watts

Fixture Output: 4229 Lumens

28" STAXX THREE TIER PENDANT

Model No. STX-28P-SN-3C-27Z-30K

(Satin Nickel)

Fixture Wattage: 88 Watts

Fixture Output: 5950 Lumens

28" STAXX SIX TIER PENDANT

Model No. STX-28P-SN-6S-27Z-30K

(Satin Nickel)

Fixture Wattage: 170 Watts

Fixture Output: 11500 Lumens


38" Steelos Linear
Matte Black



Available Finishes



Polished
Chrome



Matte
Black

STEELOS PENDANT

Features


- Available in Polished Chrome and Matte Black
- Comes with 144" of field adjustable cable
- Cutting and splicing not required
- Steel housing
- Fixtures ship preconfigured with random pattern
- Driver located in canopy housing
- Damp location rated

Specifications


- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120-277VAC 50/60Hz
- Dimming: TRIAC, ELV, or 0-10V dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom


- Upgradable to 4000K/ 90CRI

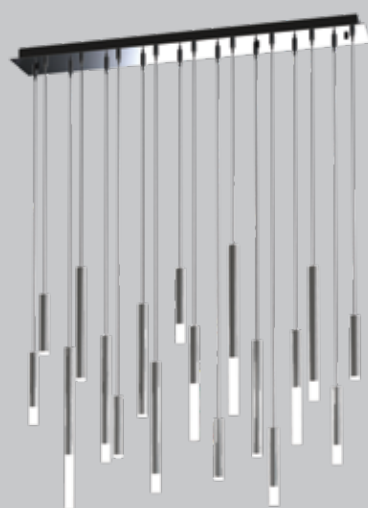

**STEELOS 38" LINEAR
PENDANT (18 LIGHT)**

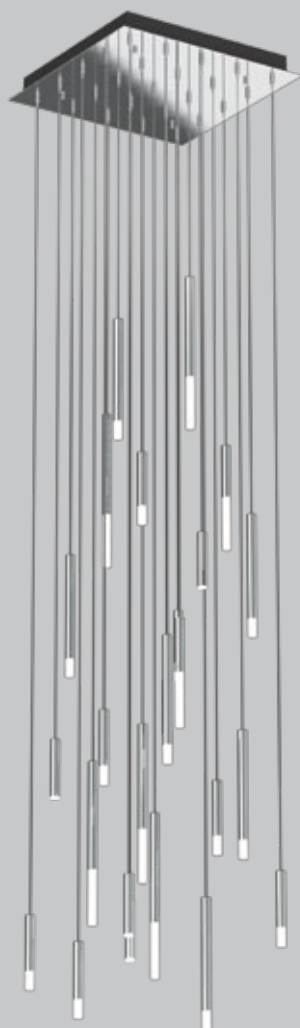

**STEELOS 24" SQUARE
PENDANT (25 LIGHT)**

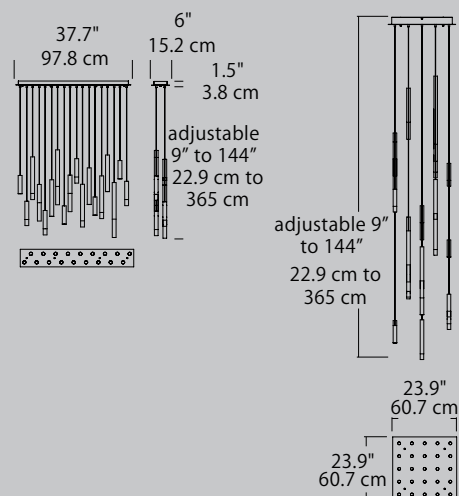

Steeleos feature a complete out-of-the-box random aesthetic ready for installation. Comprised of a thoughtful arrangement with different tube and acrylic lengths, it delivers a timeless look with powerfull performance.

38" STEELOS LINEAR PENDANT (18 LIGHT)

Model No: STL-38P-PC-27U-30K

(Polished Chrome)

Model No: STL-38P-BL-27U-30K

(Matte Black)

Fixture Wattage: 30W

Fixture Output: 1948 Lumens

24" STEELOS SQUARE PENDANT (25 LIGHT)

Model No: STL-24P-PC-27Z-30K
(Polished Chrome)

**SPECIAL
ORDER**

Model No: STL-24P-BL-27Z-30K
(Matte Black)

Fixture Wattage: 36W

Fixture Output: 2379 Lumens



OPTIONAL JOINER ASSEMBLY (38" LINEAR)

Model No. 95062

(Black)

96" Steelos
Matte Black




Available in Two Finishes




Polished
Chrome




Matte
Black

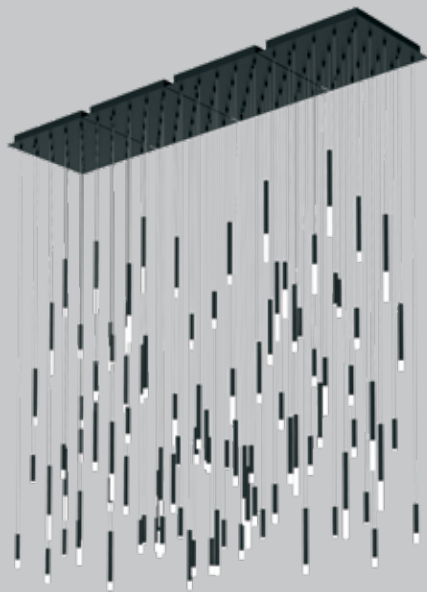

96" STEELOS PENDANT

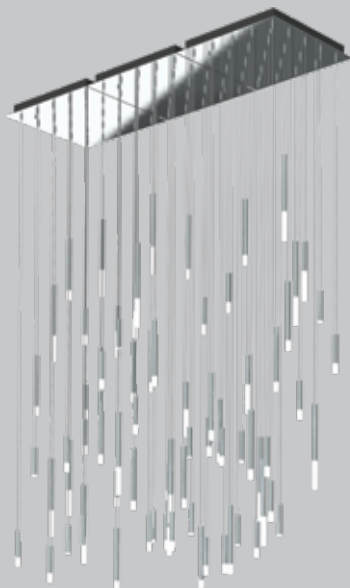

72" STEELOS PENDANT

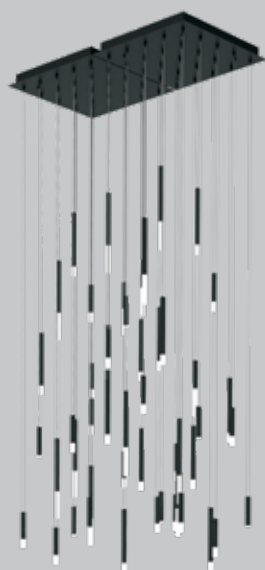

48" STEELOS PENDANT

Looking to make a dramatic visual impact with out-of-the-box ease of installation? Steelos Large pendants hit the mark. Join together multiple 2'x2' canopies to create a stunning work of art through light.

STEELOS LARGE PENDANT

Features


- Available in Polished Chrome and Matte Black
- Comes with 144" of field adjustable cable
- Cutting and splicing not required
- Fixtures ship preconfigured with random pattern
- Steel housing
- Driver located in canopy housing
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120-277VAC 50/60Hz
- Dimming: TRIAC, ELV, or 0-10V dimmable

Custom

- Upgradable to 4000K/ 90CRI

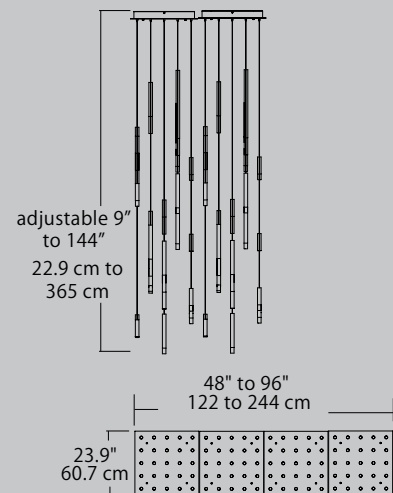

96" STEELOS PENDANT

Model No: STL-72P-PC-27U-30K
(Polished Chrome)

Model No: STL-72P-BL-27U-30K
(Matte Black)

Fixture Wattage: 144W

Fixture Output: 9,516 Lumens

**SPECIAL
ORDER**

72" STEELOS PENDANT

Model No: STL-72P-PC-27U-30K
(Polished Chrome)

Model No: STL-72P-BL-27U-30K
(Matte Black)

Fixture Wattage: 108W

Fixture Output: 7,137 Lumens

**SPECIAL
ORDER**

48" STEELOS PENDANT

Model No: STL-48P-PC-27U-30K
(Polished Chrome)

Model No: STL-8P-BL-27U-30K
(Matte Black)

Fixture Wattage: 72W

Fixture Output: 4,758 Lumens

**SPECIAL
ORDER**



24" Seraph Square
Short Frosted Light Guides
Matte Black



Available in Two Finishes



Polished
Chrome




Matte
Black

Design Ideas


(Field-adjustable suspension cables)



SHORT FROSTED LIGHT GUIDE
POLISHED CHROME FINISH




SHORT FROSTED LIGHT GUIDE
POLISHED CHROME FINISH

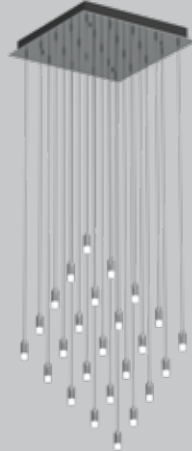


SHORT FROSTED LIGHT GUIDE
POLISHED CHROME FINISH



TALL CLEAR LIGHT GUIDE
MATTE BLACK FINISH



TALL CLEAR LIGHT GUIDE
MATTE BLACK FINISH



TALL CLEAR LIGHT GUIDE
MATTE BLACK FINISH

Create stunning light sculptures that perform. Select from design ideas above, or create your own.

SERAPH SQUARE PENDANT

Features


- Available in Polished Chrome and Matte Black
- Choose from Short Frosted or Tall Clear light guides
- Includes 25 pendant light guides, with 144" of field adjustable cable, cutting and splicing not required
- Steel housing
- Driver located in canopy housing

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120-277VAC 50/60Hz
- Dimming: TRIAC, ELV, or 0-10V dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to 4000K/ 90CRI
- Gangable/joinable
- Additional Light guides are available consult customer service

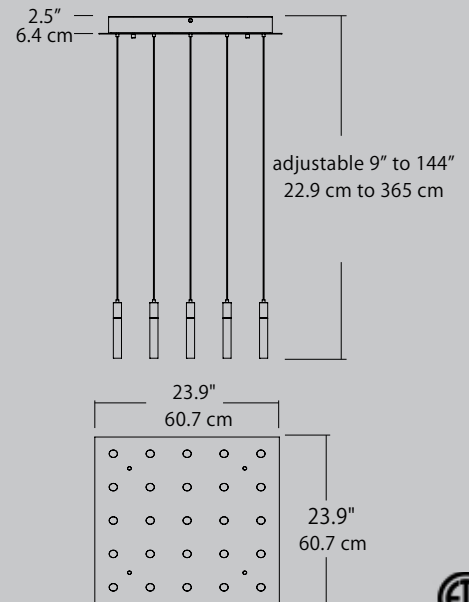

24" SERAPH SQUARE PENDANT (25 Light)

Model No: SER-24P-PC-LSF-27U-30K
(Polished Chrome/ Short Frosted Light Guide)

Model No: SER-24P-PC-LTC-27U-30K
(Polished Chrome/ Tall Clear Light Guide)

Model No: SER-24P-BL-LSF-27U-30K
(Matte Black/ Short Frosted Light Guide)


Model No: SER-24P-BL-LTC-27U-30K
(Matte Black/ Tall Clear Light Guide)

Fixture Wattage: 37W
Fixture output: 2050 lumens

38" Seraph Linear
Gradient Light Guide
Polished Chrome Finish



Available Finishes




Polished
Chrome



Matte
Black

Design Ideas

(Field-adjustable suspension cables)

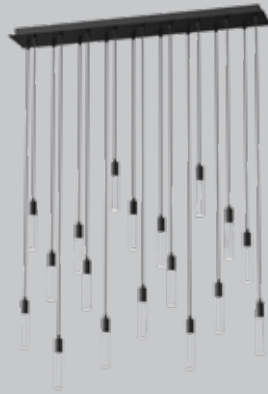

GRADIENT LIGHT GUIDE
MATTE BLACK FINISH



TALL CLEAR LIGHT GUIDE
MATTE BLACK FINISH



TALL CLEAR LIGHT GUIDE
MATTE BLACK FINISH

Seraph pendants hang downward 9" to 144" from the ceiling. Optional ceiling-mounted swag supports offer custom variations.

SERAPH LINEAR PENDANT

Features

- Available in Polished Chrome and Matte Black
- Choose from Tall Clear or Gradient light guides
- Includes 18 pendant light guides, with 144" of field adjustable cable, cutting and splicing not required
- Steel housing
- Damp location rated
- Driver located in canopy housing


Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120-277VAC 50/60Hz
- Dimming: TRIAC, ELV, or 0-10V dimmable

• For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to 4000K/ 90CRI
- Gangable/joinable on either long or short side
- Additional Light guides options available

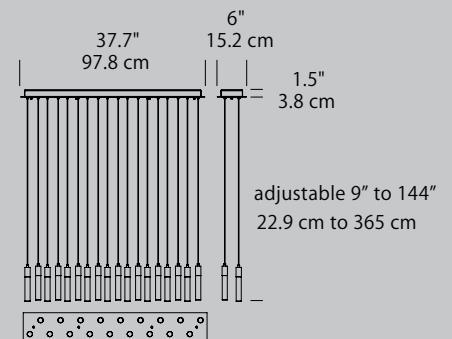

38" SERAPH LINEAR PENDANT (18 LIGHT)

Model No: SER-38P-PC-LTC-27U-30K
(Polished Chrome/ Tall Clear Light Guide)

Model No: SER-38P-PC-LGR-27U-30K
(Polished Chrome/ Gradient Light Guide)

Model No: SER-38P-BL-LTC-27U-30K
(Matte Black/ Tall Clear Light Guide)

Model No: SER-38P-BL-LGR-27U-30K
(Matte Black/ Gradient Light Guide)

Fixture Wattage: 31W
Fixture Output: 1948 lumens




CUTTING
SPLICING
**NOT
REQUIRED**

OPTIONAL ACCESSORIES

Ceiling Mounted Swag Supports

Model No: 92043-PC
(Polished Chrome)


Model No: 92043-BL
(Matte Black)



48" Float Linear
Satin Nickel



Available in Two Finishes



Polished
Chrome



Satin
Nickel

FLOAT LINEAR PENDANT

Features


- Available in Polished Chrome and Satin Nickel
- Two 72" black support cables
- Stamped steel construction
- Extruded opal white diffuser
- Driver located in canopy housing
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120VAC 50/60Hz
- Dimming: TRIAC dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to 120-277VAC driver with Universal Dimming (TRIAC/ ELV/0-10V)

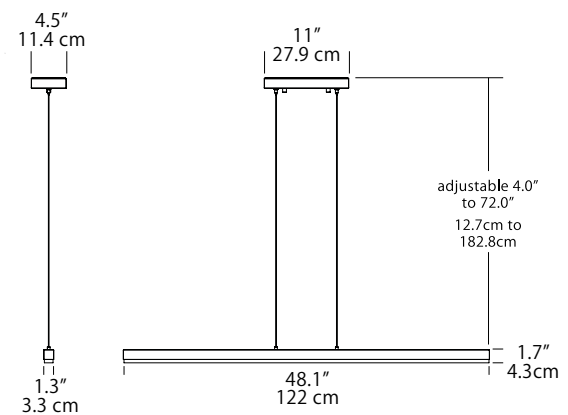

Beauty in the basics. Simple rectangular geometry delivering ambient illumination of high quality and quantity. Acrylic diffuser spreads light evenly into a space and reduces glare.

48" FLOAT LINEAR PENDANT

Model No. FLT-48P-PC-12T-30K
(Polished Chrome)

Model No. FLT-48P-SN-12T-30K
(Satin Nickel)


Fixture Wattage: 44.1 Watts
Fixture Output: 2859 Lumens



48" Flair Linear
White with Satin Nickel end cap
and joiner assembly (Two Shown)




Available in Three Finishes



Satin
Nickel



Matte
White



Matte
Black

FLAIR LINEAR PENDANT

Features

- Available in three finishes
- Diffuse polycarbonate lens
- Formed steel housing
- Steel or wood endcaps
- Driver located in canopy housing
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120VAC 50/60Hz
- Dimming: TRIAC dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)



48" FLAIR LINEAR PENDANT

Model No. FLR-48L-WH-12T-30K

(Matte White with Satin Nickel endcap)

Model No. FLR-48L-WH-MP-12T-30K

(Matte White with Maple endcap)

Model No. FLR-48L-WH-WN-12T-30K

(Matte White with Walnut endcap)

Model No. FLR-48L-BL-12T-30K

(Matte Black with Satin Nickel endcap)

Model No. FLR-48L-BL-MP-12T-30K

(Matte Black with Maple endcap)

Model No. FLR-48L-BL-WN-12T-30K

(Matte Black with Walnut endcap)

Model No. FLR-48L-SN-12T-30K

(Satin Nickel with Matte White endcap)

Model No. FLR-48L-SN-MP-12T-30K

(Satin Nickel with Maple endcap)

Model No. FLR-48L-SN-WN-12T-30K

(Satin Nickel with Walnut endcap)

Fixture Wattage: 21 Watts
Fixture Output: 2000 Lumens

OPTIONAL ACCESSORIES

Optional Joiner Assembly

Model No. 92075-SN

(Satin Nickel)

Slim and trim yet designed for maximum lighting output, our Flair linear pendant washes work surfaces with bright, LED illumination. Choose from three finishes. Optional wood endcaps are available in Maple or Walnut.

48" Quadra
(Up/ Down Light)



QUADRA LINEAR PENDANT

Features


- Available in Polished Chrome finish
- Diffused illumination fills the room with light
- Fabricated stainless steel housing
- Replaceable thin edge-lit LED panels
- Driver located in canopy housing
- Damp location rated

Specifications


- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120VAC 50/60Hz
- Dimming: TRIAC dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)

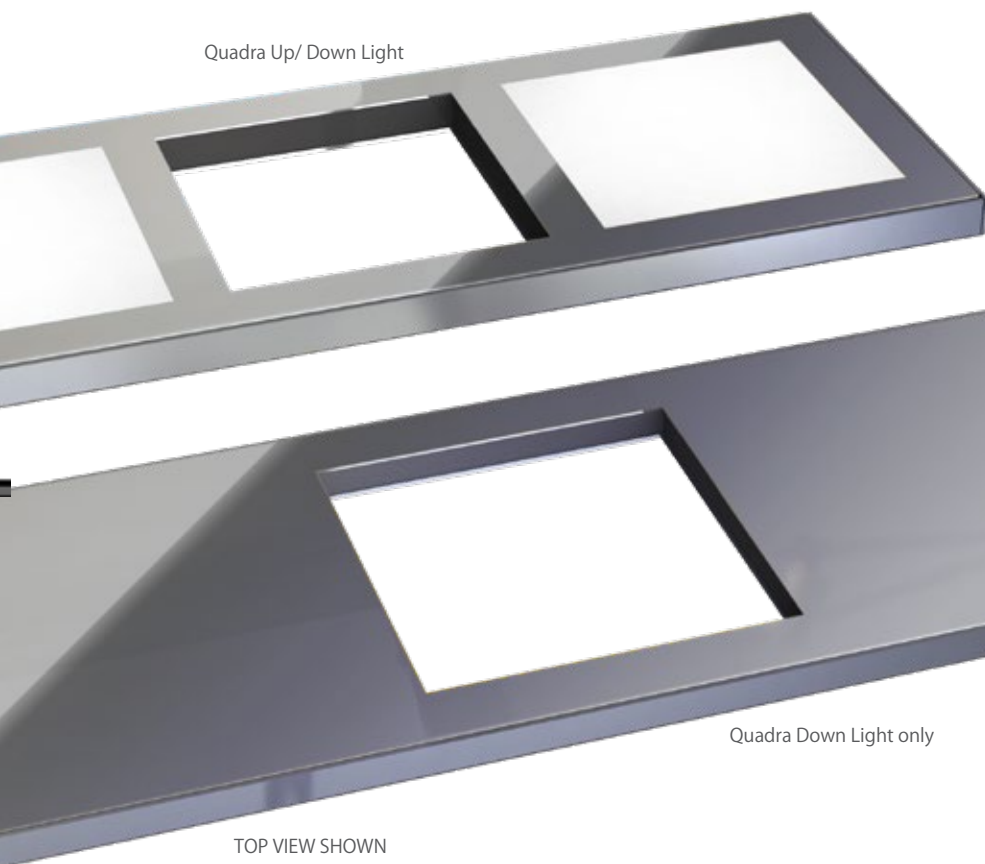

Airy Quadra Linear pendant floats from four nearly invisible cables and is so thin that it almost disappears when viewed from the side. Available as a down light or up/down light.

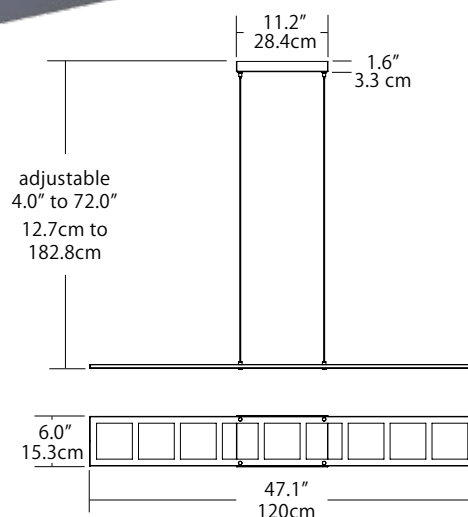

48" QUADRA PENDANT (Down Light only)

Model No. QDR-48P-PC-12T-30K

(Polished Chrome)

Fixture Watts: 30 Watts

Fixture Output: 1827 Lumens

48" QUADRA PENDANT (Up/ Down Light)

Model No. QDR-D48-PC-12T-30K

(Polished Chrome)

Fixture Wattage: 41 Watts

Fixture Output: 2469 Lumens

LED Ready Over-Counter
Red



Available in Three Finishes



White

Grey

Red

BLACKJACKLIGHTING.COM

LED READY OVER-COUNTER

Features



- Available in Red, White or Grey finish
- Baked gloss enamel paint
- Fitted with frosted prismatic lens
- Adjustable aircraft cable suspension
- Cord length: 6.5 feet (198cm)

Specifications

- Input Voltage: 120-277VAC 50/60Hz
- Requires two 48" Type B /T8 LED bypass lamps (lamps not included)
- Fixture accepts 120 to 277VAC input
- Does not accept T8 Fluorescent lamps or T8 LED Retrofit lamps
- Contact customer service for additional information about the required lamps and where to purchase them

Custom

- Consult Blackjack Lighting for custom upgrades

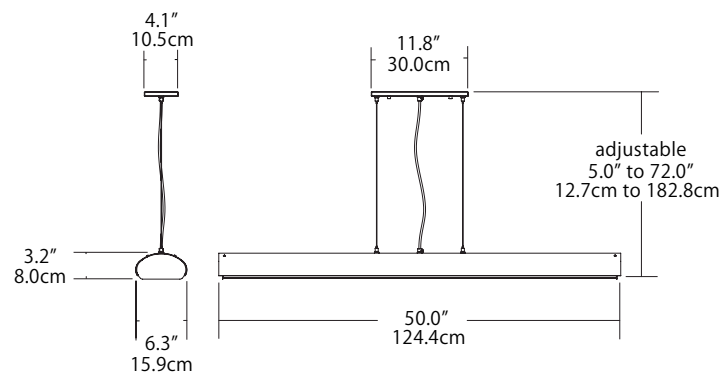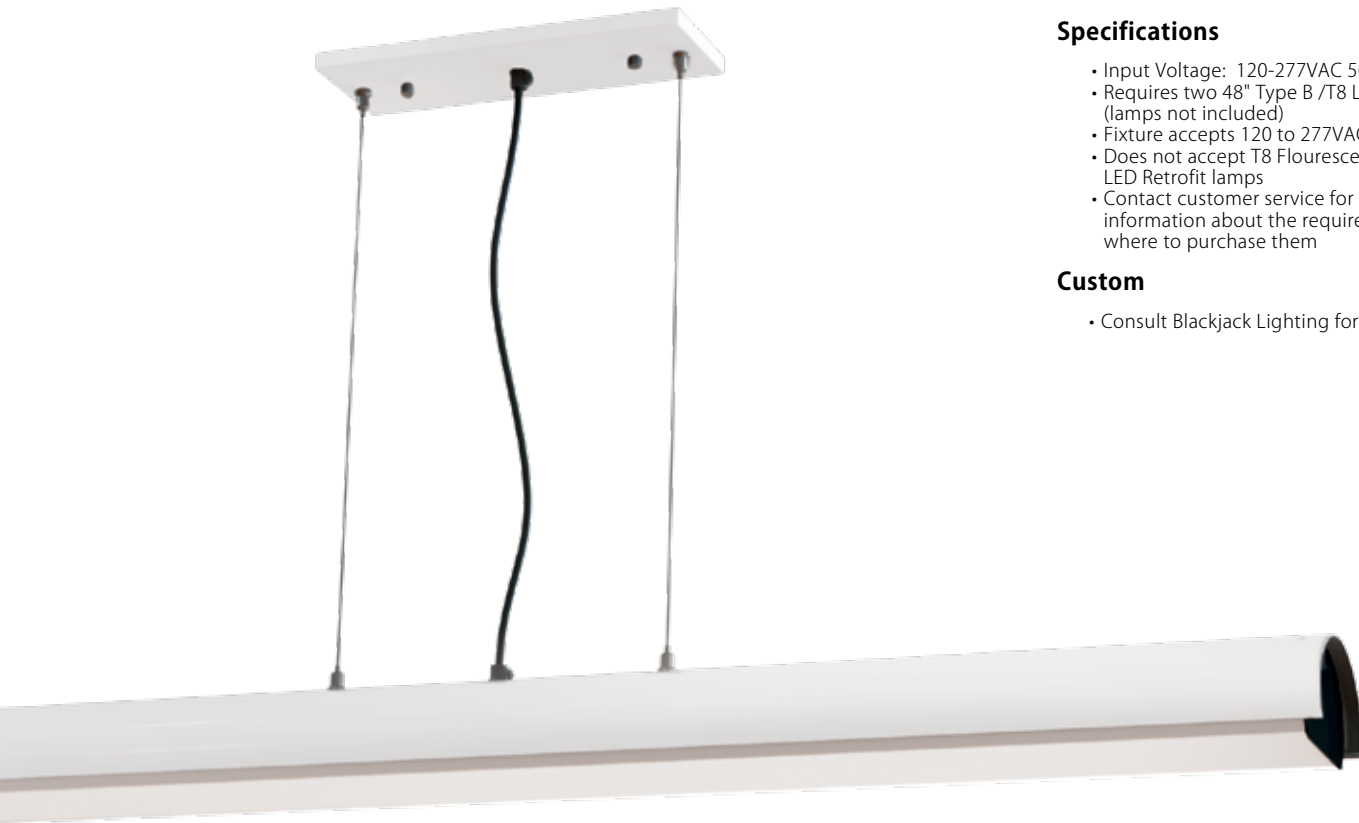

A great looking fixture at a great price, this linear pendant directs bright, glare-free light over work surfaces without shadows or pesky dark spots. Required T8 LED bypass lamps sold separately.



LED READY OVER-COUNTER PENDANT

Model No. LCL-49L-WH (White)

Model No. LCL-49L-RD (Red)

Model No. LCL-49L-GR (Grey)



32" Domos
Matte Black exterior, Brushed Gold interior



**Matte Black exterior,
Brushed Gold interior**



**Matte White exterior,
Brushed Gold interior**



**Brass exterior,
White interior**



**Satin Nickel exterior,
White interior**



Subtle, arching geometric forms with color and scale. Quality illumination delivered via screw-in bulb or integrated, highly-efficient LEDs.

DOMOS PENDANT

Features


- Available in four exterior finish options, each with complementary interior finishes
- E26 socket Standard (lamp not provided)
- Optional integrated LED light kit with glass diffuser comes with a 12' black power cord. (32" and 20" LED light kits also come with aircraft suspension cable)
- Suspends 72" from the ceiling with a black power cord (white shade comes with white cord)
- Spun steel construction with a powder coated paint finish
- Damp location rated

Specifications

- Color Rendering Index: 90CRI for all light kit options
- LED Color Temperature: 3000K for all light kit options
- Input Voltage: 120VAC 50/60Hz (120V- 277VAC for integrated LED light kit options only)
- Dimming: No dimming options for E26 socket. Integrated LED light kit upgrade features Universal Dimming (TRIAC/ ELV/ 0-10V)
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to integrated LED light kit; includes 120-277VAC driver with Universal Dimming (TRIAC/ ELV/ 0-10V)
- Integrated LED light kit upgradable to 4000K/ 90CRI

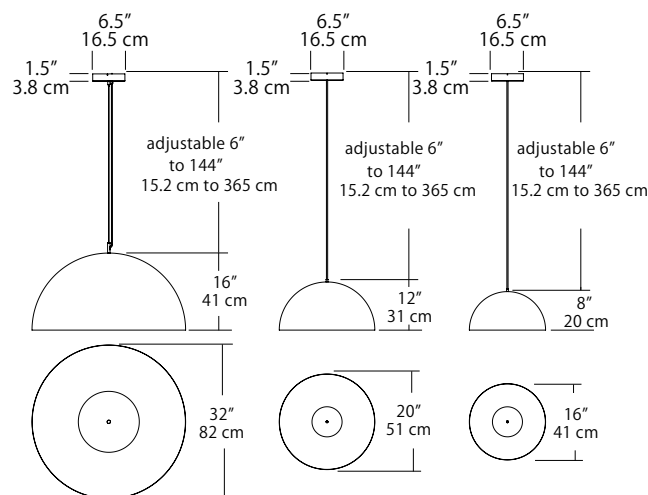

32" DOMOS PENDANT

Model No. DOM-32P-WG-12E-NAK

(White Exterior/ Brushed Gold Interior) E-26 Screw-In socket

Model No. DOM-32P-WG-12U-30K

(White Exterior/ Brushed Gold Interior) Integrated LED Light Kit

Model No. DOM-32P-BG-12E-NAK

(Black Exterior/ Brushed Gold Interior) E-26 Screw-In socket

Model No. DOM-32P-BG-12U-30K

(Black Exterior/ Brushed Gold Interior) Integrated LED Light Kit

Optional LED Light Kit

Fixture Wattage: 23 Watts

Fixture Output: 1800 Lumens

20" DOMOS PENDANT

Model No. DOM-20P-WG-12E-NAK

(White Exterior/ Brushed Gold Interior) E-26 Screw-In socket

Model No. DOM-20P-WG-12U-30K

(White Exterior/ Brushed Gold Interior) Integrated LED Light Kit

Model No. DOM-20P-BG-12E-NAK

(Black Exterior/ Brushed Gold Interior) E-26 Screw-In socket

Model No. DOM-20P-BG-12U-30K

(Black Exterior/ Brushed Gold Interior) Integrated LED Light Kit

Optional LED Light Kit

Fixture Wattage: 16 Watts

Fixture Output: 900 Lumens

16" DOMOS PENDANT

Model No. DOM-16P-WG-12E-NAK

(White Exterior/ Brushed Gold Interior) E-26 Screw-In socket

Model No. DOM-16P-WG-12U-30K

(White Exterior/ Brushed Gold Interior) Integrated LED Light Kit

Model No. DOM-16P-BG-12E-NAK

(Black Exterior/ Brushed Gold Interior) E-26 Screw-In socket

Model No. DOM-16P-BG-12U-30K

(Black Exterior/ Brushed Gold Interior) Integrated LED Light Kit

Model No. DOM-16P-SW-12E-NAK

(Satin Nickel Exterior/ White Interior) E-26 Screw-In socket

Model No. DOM-16P-SW-12U-30K

(Satin Nickel Exterior/ White Interior) Integrated LED Light Kit

Model No. DOM-16P-RW-12E-NAK

(Brass Exterior/ White Interior) E-26 Screw-In socket

Model No. DOM-16P-RW-12U-30K

(Brass Exterior/ White Interior) Integrated LED Light Kit

Optional LED Light Kit


Fixture Wattage: 16 Watts

Fixture Output: 900 Lumens



BLACKJACK®

10" Pill Box
White exterior, Satin Nickel interior

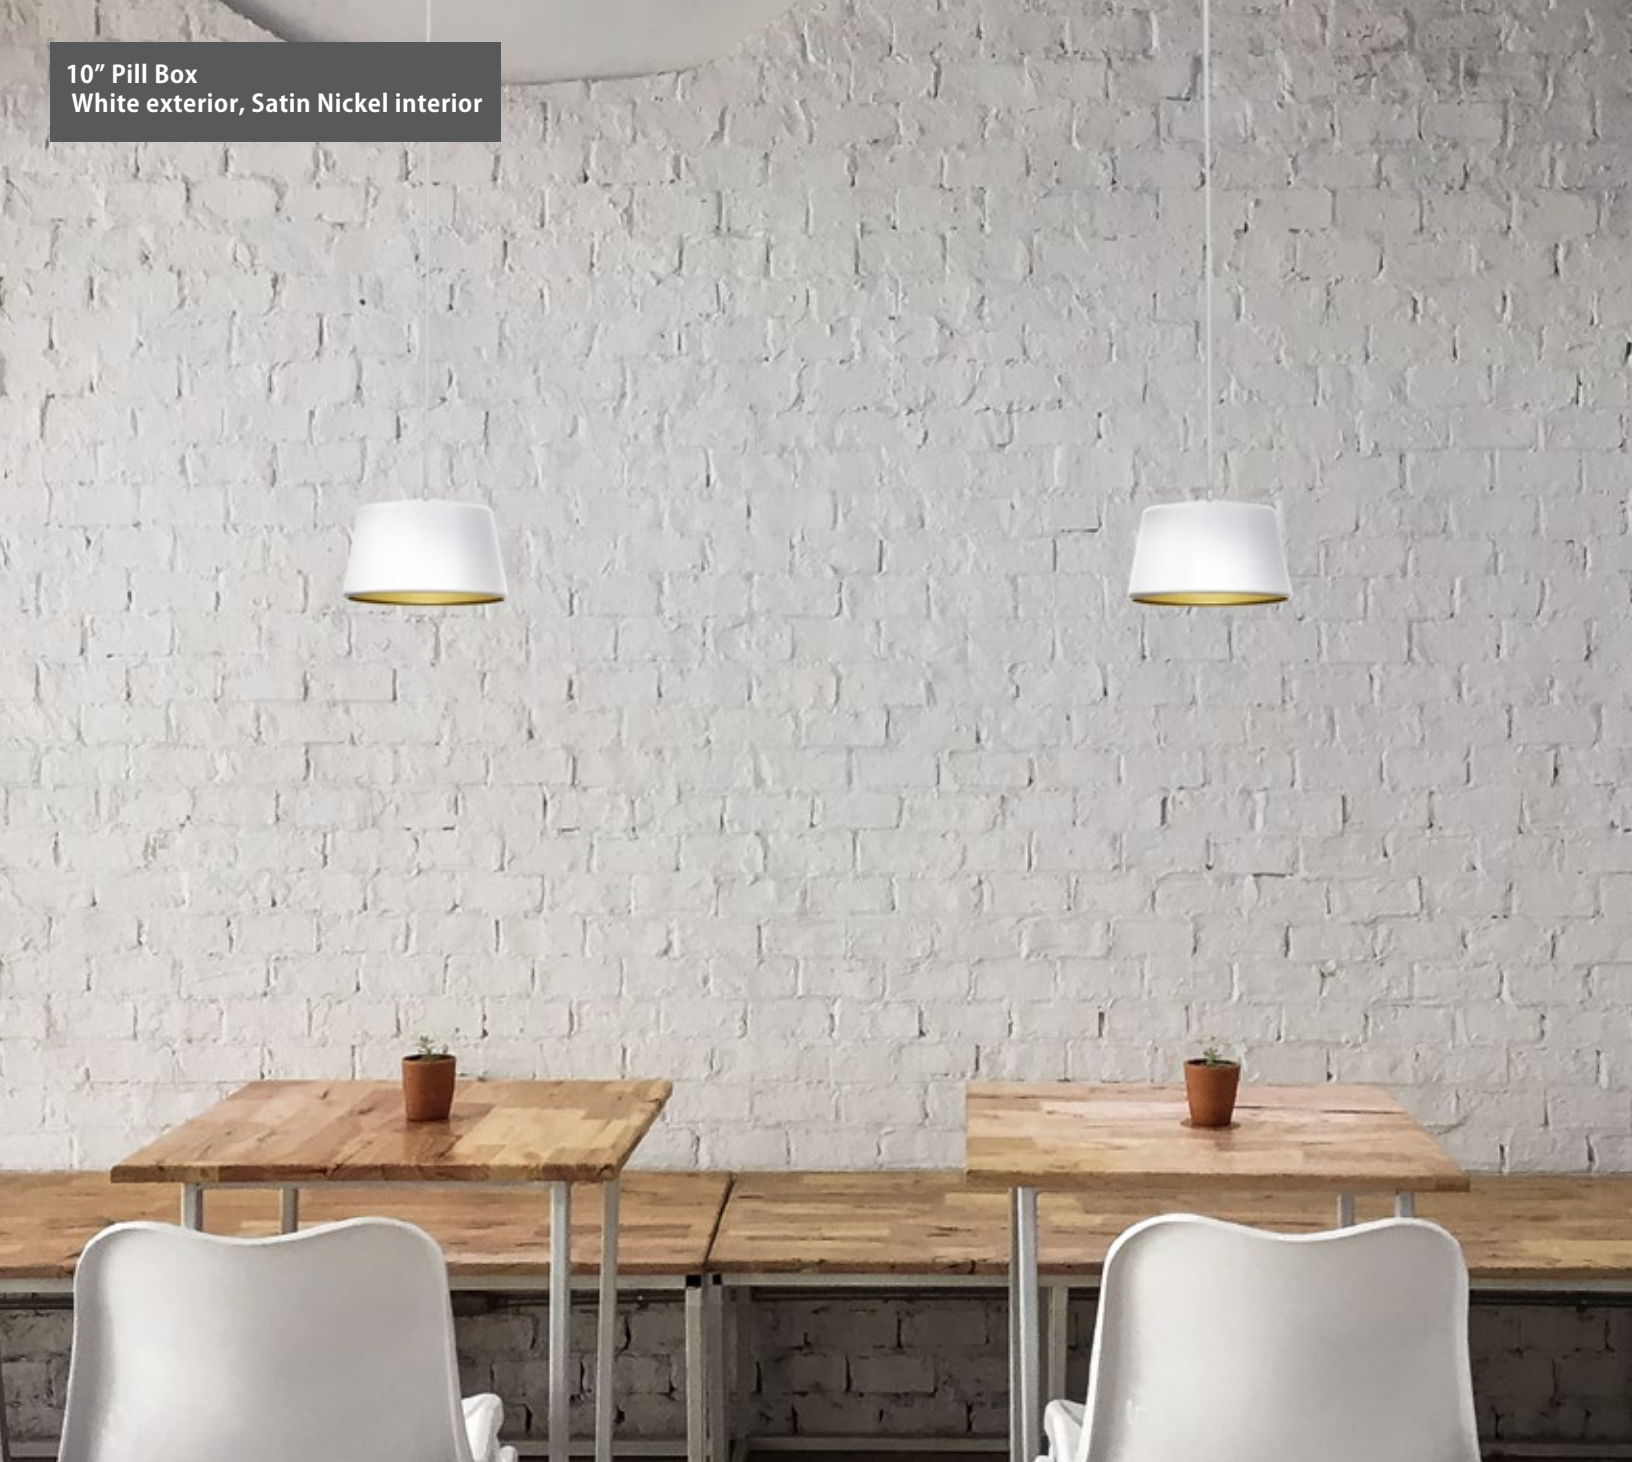

**Matte Black exterior,
Brushed Gold interior**



**Matte White exterior,
Brushed Gold interior**



**Brass exterior,
White interior**



**Satin Nickel exterior,
White interior**

Classic tapered form with playful additions of color and scale. Quality Illumination delivered via screw-in bulb or integrated, highly-efficient LEDs.

PILLBOX PENDANT

Features


- Available in four exterior finish options, each with complementary interior finishes
- E26 socket standard (lamp not provided)
- Suspends 72" from the ceiling with a black power cord (white shade comes with white cord)
- Optional integrated LED light kit with glass diffuser comes with a 12' black power cord. (20" LED light kit also come with aircraft suspension cable)
- Spun steel construction with a powder coated paint finish
- Damp location rated

Specifications

- Color Rendering Index: 90CRI for all light kit options
- LED Color Temperature: 3000K for all light kit options
- Input Voltage: 120VAC 50/60Hz (120V- 277VAC for integrated LED light kit options only)
- Dimming: No dimming options for E26 socket, Integrated LED light kit upgrade comes with Universal Dimming (TRIAC/ ELV/ 0-10V)
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to integrated LED light kit; includes 120- 277VAC driver with Universal Dimming (TRIAC/ ELV/0-10V)
- Integrated LED light kit (comes standard in 3000K) upgradable to 4000K/ 90CRI

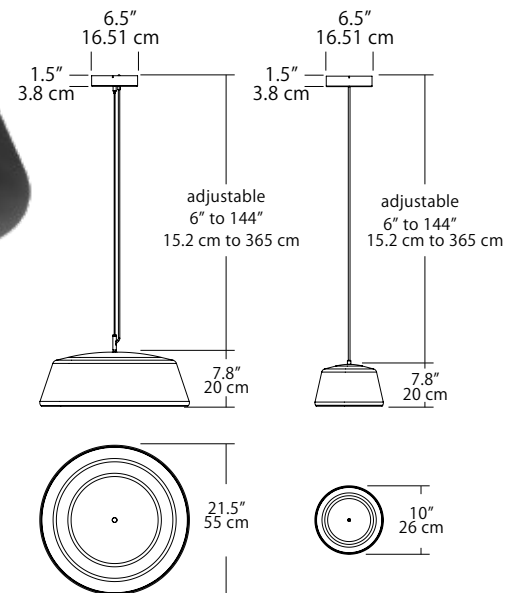

10" PILLBOX PENDANT

Model No. PBX-10P-WG-12E-NAK

(White Exterior/ Brushed Gold Interior) E-26 Screw-In socket

Model No. PBX-10P-WG-12U-30K

(White Exterior/ Brushed Gold Interior) Integrated LED Light Kit

Model No. PBX-10P-BG-12E-NAK

(Black Exterior/ Brushed Gold Interior) E-26 Screw-In socket

Model No. PBX-10P-BG-12U-30K

(Black Exterior/ Brushed Gold Interior) Integrated LED Light Kit

Model No. PBX-10P-SW -12E-NAK

(Satin Nickel Exterior/ White Interior) E-26 Screw-In socket

Model No. PBX-10P-SW-12U-30K

(Satin Nickel Exterior/ White Interior) Integrated LED Light Kit

Model No. PBX-10P-RW -12E-NAK

(Brass Exterior/ White Interior) E-26 Screw-In socket

Model No. PBX-10P-RW-12U-30K

(Brass Exterior/ White Interior) Integrated LED Light Kit

Optional LED Light Kit

Fixture Wattage: 16 Watts

Fixture Output: 900 Lumens

BLACKJACK®

20" PILLBOX PENDANT

Model No. PBX-20P-BG-12E-NAK

(Black Exterior/ Brushed Gold Interior) E-26 Screw-In socket

Model No. PBX-20P-BG-12U-30K

(Black Exterior/ Brushed Gold Interior) Integrated LED Light Kit

Model No. PBX-20P-SW-12E-NAK

(Satin Nickel Exterior/ White Interior) E-26 Screw-In socket

Model No. PBX-20P-SW-12U-30K

(Satin Nickel Exterior/ White Interior) Integrated LED Light Kit

Optional LED Light Kit

Fixture Wattage: 23 Watts

Fixture Output: 1800 Lumens



13" Cirq
Satin Nickel





CIRQ PENDANT

Features


- Available in Satin Nickel
- Two thin black 72" suspension wires can be easily adjusted to any height with no cutting or splicing
- Driver located in canopy housing
- Steel fabricated construction
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120VAC 50/60Hz
- Dimming: TRIAC dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)

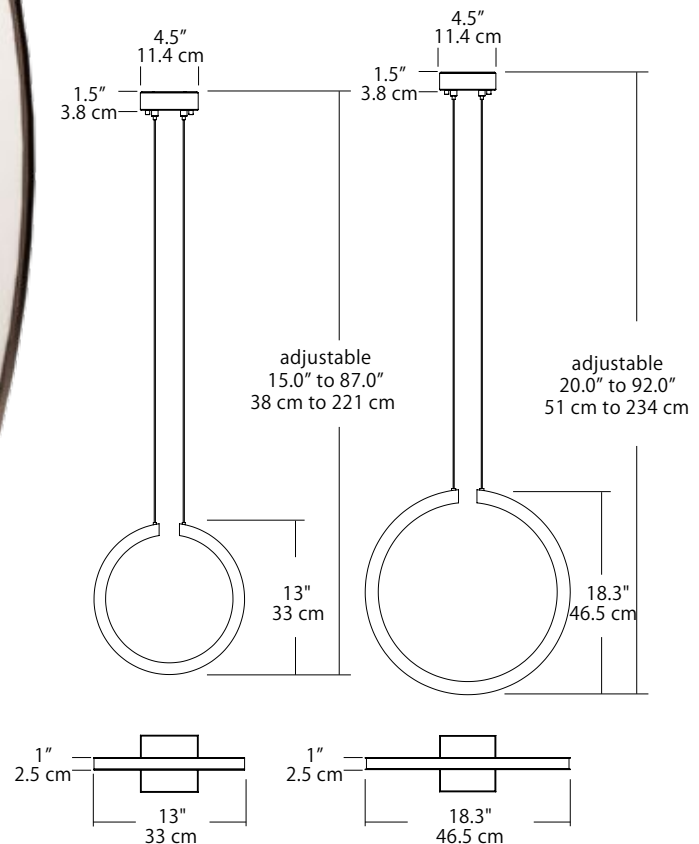

An open ring of light turned on its side offers task and ambient lighting in a single fixture. The custom acrylic light guide sends illumination in all directions.

13" CIRQ PENDANT

Model No. CRQ-13P-SN-12T-30K

(Satin Nickel)

Fixture Watts: 13 Watts

Fixture Output: 570 Lumens

18" CIRQ PENDANT

Model No. CRQ-18P-SN-12T-30K

(Satin Nickel)

Fixture Watts: 31 Watts

Fixture Output: 1405 Lumens

11" Double Quadra
Polished Chrome



DOUBLE QUADRA PENDANT

Features


- Extraordinary light output from a single, compact and unique pendant
- Two suspension cables precisely hold the fixture in any desired orientation and prevent twisting and turning
- Replaceable light source
- Driver located in canopy housing
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120VAC 50/60Hz
- Dimming: TRIAC dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)

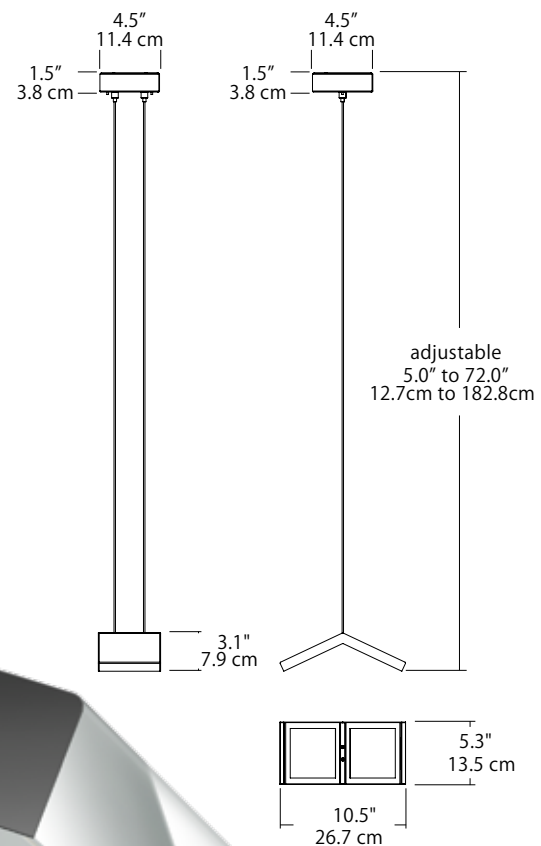

Practical and powerful, this pendant has a slim profile that creates visual interest from any angle.

11" QUADRA DOUBLE PENDANT

Model No. QDR-11P-PC-12T-30K

(Polished Chrome)

Fixture Wattage: 18 Watts

Fixture Output: 993 Lumens

8" Tria
Polished Chrome



Available Finishes



Polished
Chrome



White

TRIA PENDANT

Features

- Available in two finishes
- Stamped stainless steel housing
- Two thin black 72" suspension wires can be easily adjusted to any height with no cutting or splicing
- Replaceable light source
- Driver located in canopy housing
- Damp location rated

Specifications


- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120VAC 50/60Hz
- Dimming: TRIAC dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)



An LED edge-lit panel inside a compact stainless steel form allows the Tria Pendant to deliver superior illumination. Open interior on two sides contrasts two finished sides

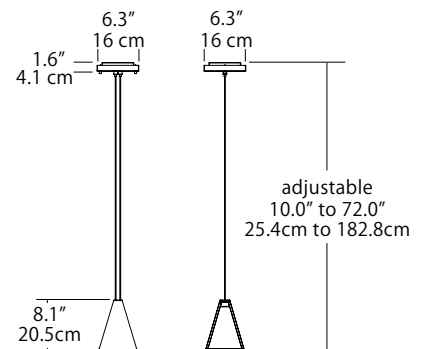

8" TRIA PENDANT

Model No. TRI-05P-PC-12T-30K
(Polished Chrome)

Model No. TRI-05P-WH-12T-30K
(White)

Fixture Wattage: 9 Watts
Fixture Output: 321 Lumens



6" Boxer
Polished Chrome



BOXER PENDANT

Features


- Welded Stainless Steel frame
- Thin black suspension wires adjust fixture 10" to 72" from ceiling
- Replaceable light source
- Driver located in canopy housing
- Damp location rated

Specifications


- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120VAC 50/60Hz
- Dimming: TRIAC dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)

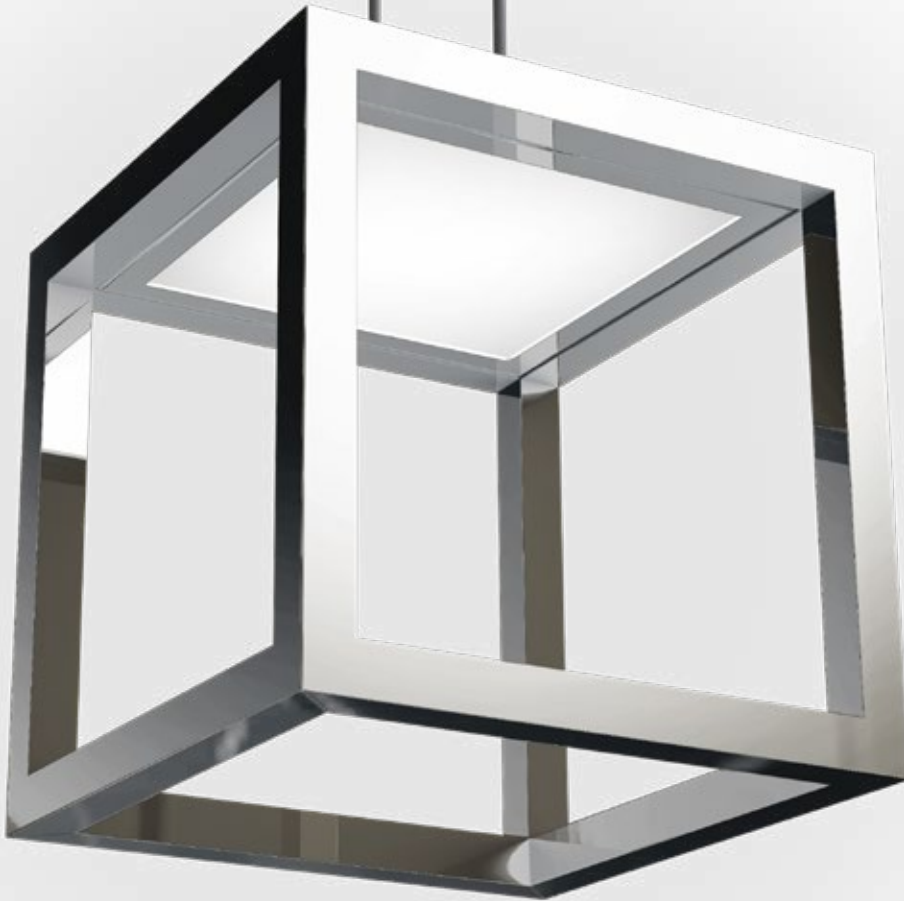

Simple squared rods transform your favorite doodle into a super high-efficiency LED ceiling pendant. Open sides and bottom fill a room with bright, low-glare illumination emitted from an edge lit panel at the top.

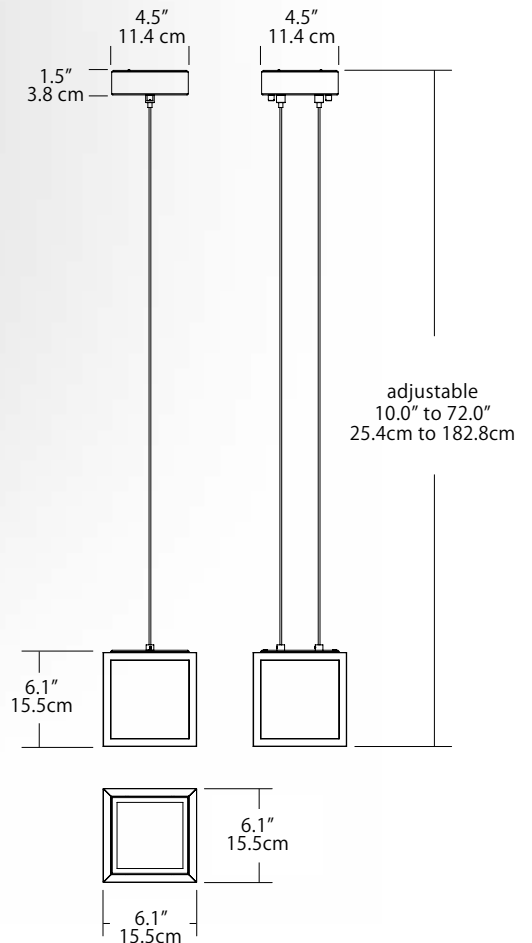

6" BOXER PENDANT

Model No. BOX-06P-PC-12T-30K
(Polished Chrome)

Fixture Wattage: 9 Watts
Fixture Output: 466 Lumens

12" Glass Sphere
White Frosted
Polished Chrome



**8" CLEAR GLASS
SPHERE**
Model No.
MSSC-08P-PC-12P-30K



**8" SMOKED GLASS
SPHERE**
Model No.
MSSS-08P-BL-12P-30K



**8" WHITE FROSTED
GLASS SPHERE**
Model No.
MSSF-08P-PC-12P-30K

GLASS SPHERE PENDANT

Features


- Available in three hand blown glass finishes
- Canopy with cable and socket are available in either Matte Black or Polished Chrome finishes
- Includes frosted acrylic light guide diffuser
- Suspends from adjustable 144" cable
- Cutting and splicing are not required
- Excess cable stays coiled inside stamped steel canopy
- Driver located on top of canopy and mounts inside junction box.
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120VAC 50/60Hz
- Dimming: Phase dimming (TRIAC or ELV)
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to 4000K/ 90CRI
- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)

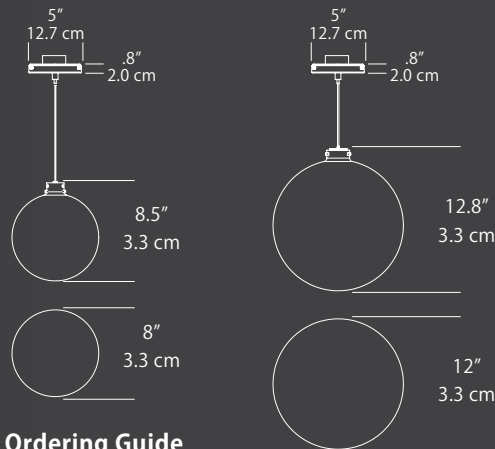

Ordering Guide

8" GLASS SPHERE PENDANT

Series	Size	Finish	Volts/ Dimming	Color Temp.
MSSC	08P	BL	12P	30K
Clear Glass	8" Dia.	Black	120V Phase Dimming	3000K
MSSF		PC	27U	40K
White Frosted		Chrome	120-277V Universal Dimming	4000K
MSSS				(30K Standard)
Smoked Glass				(12P Standard)

Fixture Wattage: 10 Watts
 Fixture Output: 170 Lumens

12" GLASS SPHERE PENDANT

Series	Size	Finish	Volts/ Dimming	Color Temp.
MSLC	12 P	BL	12P	30K
Clear Glass	12" Dia.	Black	120V Phase Dimming	3000K
MSLF		PC	27U	40K
White Frosted		Chrome	120-277V Universal Dimming	4000K
MSLS				(30K Standard)
Smoked Glass				(12P Standard)

Fixture Wattage: 5 Watts
 Fixture Output: 400 Lumens

12" CLEAR GLASS
 SPHERE
 Model No.
 MSLC-12P-PC-12P-30K

8" CLEAR GLASS
 SPHERE
 Model No.
 MSSC-08P-PC-12P-30K

To use these pendants with Multi-Port Canopies and Systems, use model numbers on pgs. 124-127



5" Velo Clear Glass
Filament light guide
Polished Chrome



VELO GLASS PENDANT

Features


- Available in two hand blown glass finishes
- Canopy, with cable and socket are available in either Matte Black or Polished Chrome finishes
- Choose between three acrylic light guide options
- Suspends from adjustable 144" cable
- Cutting and splicing are not required
- Excess cable stays coiled inside stamped steel canopy
- Driver located on top of canopy and mounts inside junction box.
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120VAC 50/60Hz
- Dimming: Phase dimming (TRIAC or ELV)
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to 4000K/ 90CRI
- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)

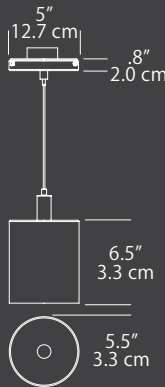

Ordering Guide

5" VELO CLEAR GLASS PENDANT

Series	Size	Finish	Volts/ Dimming	Color Temp.
	– 05P –		–	
MVCB Bubble	05P 5" Dia.	BL Black	12P 120V Phase Dimming	30K 3000K
MVCF Filament		PC Chrome	27U 120-277V Universal Dimming	40K 4000K
MVCC Clear				(30K Standard)
				(12P Standard)

Fixture Wattage: 10 Watts
 Fixture Output: 170 Lumens

5" VELO SMOKED GLASS PENDANT


Series	Size	Finish	Volts/ Dimming	Color Temp.
	– 05P –		–	
MVSB Bubble	05P 5" Dia.	BL Black	12P 120V Phase Dimming	30K 3000K
MVSF Filament		PC Chrome	27U 120-277V Universal Dimming	40K 4000K
MVSC Clear				(30K Standard)
				(12P Standard)

Fixture Wattage: 5 Watts
 Fixture Output: 170 Lumens

To use these pendants with Multi-Port Canopies and Systems, use model numbers on pgs. 124-127




4" Small Bullet
Matte Black finish
Brushed Copper interior

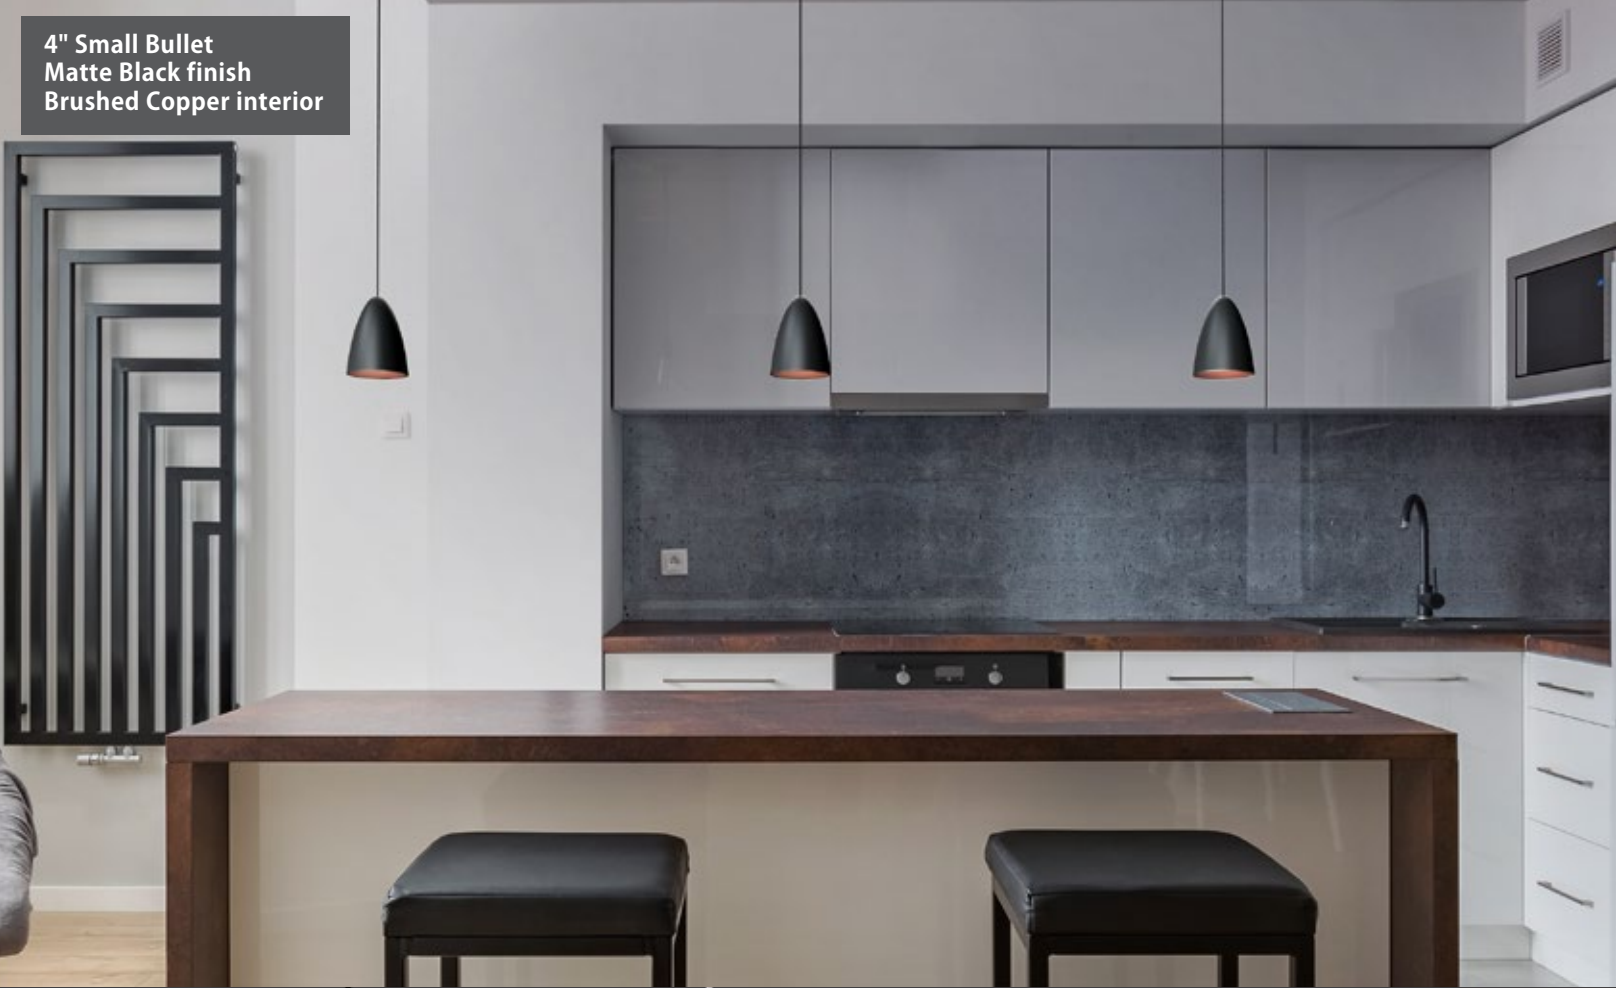

4" SMALL BULLET
Model No.
MBSB-04P-BL-12P-30K



4" SMALL BULLET
Model No.
MBSW-04P-PC-12P-30K

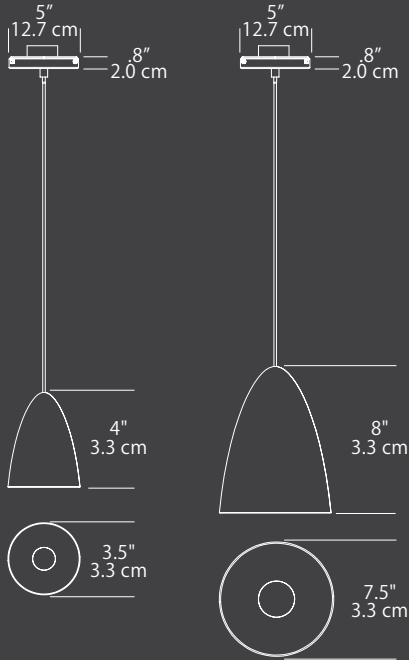

Ordering Guide

4" SMALL BULLET PENDANT

Series	Size	Finish	Volts/ Dimming	Color Temp.
MBSB Black	04P 4" Dia.	BL Black	12P 120V Phase Dimming	30K 3000K
MBSW White		PC Chrome	27U 120-277V Universal Dimming	40K 4000K (30K Standard)

(12P Standard)

Fixture Wattage: 3 Watts
Fixture Output: 170 Lumens



To use these pendants with Multi-Port Canopies and Systems, use model numbers on pgs. 124-127

8" Large Bullet
White finish
Brushed Gold interior



8" LARGE BULLET
Model No.
MBLW-08P-PC-12P-30K

8" LARGE BULLET
Model No.
MBLB-08P-BL-12P-30K

BULLET PENDANT

Features

- White Shade with Brushed Gold interior comes with silver cable Poished Chrome socket and canopy.
- Matte Black shades with Brushed Copper interior wcomes with Matte Black socket and canopy
- Suspends from adjustable 144" cable
- Cutting and splicing are not required
- Excess cable stays coiled inside stamped steel canopy
- Driver located on top of canopy and mounts inside junction box.
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120VAC 50/60Hz
- Dimming: Phase dimming (TRIAC or ELV)
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to 4000K/ 90CRI
- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)

Ordering Guide

8" LARGE BULLET PENDANT

Series	Size	Finish	Volts/ Dimming	Color Temp.
MBLB Black	08P 8" Dia.	BL Black	12P 120V Phase Dimming	30K 3000K
MBLW White		WH White	27U 120-277V Universal Dimming	40K 4000K (30K Standard)

(12P Standard)

To use these pendants with Multi-Port Canopies and Systems, use model numbers on pgs. 124-127

Fixture Wattage: 5 Watts
Fixture Output: 400 Lumens



Novo Short
Matte Black finish with
Bubble light guide



NOVO SHORT WITH REFLECTOR RING
Model No.
 MNSR-02P-BL-12P-30K


NOVO SHORT WITH LUMINOUS RING
Model No.
 MNSL-02P-BL-12P-30K



NOVO SHORT WITH FROSTED DIFFUSER
Model No.
 MNSF-02P-BL-12P-30K



NOVO SHORT WITH BUBBLE DIFFUSER
Model No.
 MNSB-02P-BL-12P-30K

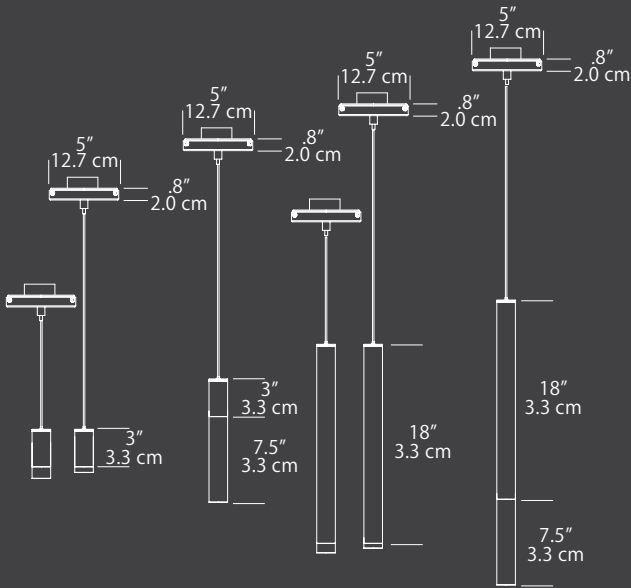

Ordering Guide

NOVO SHORT PENDANT

Series	Size	Finish	Volts/ Dimming	Color Temp.
—	02P	—	—	—
MNSR Reflector Ring	02P 2" Dia.	BL Black	12P 120V Phase Dimming	30K 3000K
MNSL Luminous Ring		PC Chrome	27U 120-277V Universal Dimming	40K 4000K (30K Standard)
MNSF Frosted				(12P Standard)
MNSB Bubble				

To use these pendants with Multi-Port Canopies and Systems, use model numbers on pgs. 124-127

Fixture Wattage: 5 Watts
 Fixture Output: 400 Lumens



Novo Tall
Matte Black finish with
Luminous Ring light guide



NOVO PENDANT

Features

- Pendants come in two sizes and two exterior finishes
- Available with screw-in reflector or optical acrylic light guide diffusers
- Suspends from adjustable 144" cable
- Cutting and splicing are not required
- Excess cable stays coiled inside stamped steel canopy
- Driver located on top of canopy and mounts inside junction box.
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120VAC 50/60Hz
- Dimming: Phase dimming (TRIAC or ELV)
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to 4000K/ 90CRI
- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)

Ordering Guide

NOVO TALL PENDANT

Series	Size	Finish	Volts/ Dimming	Color Temp.
—	02P —	—	—	—
MNTR Reflector Ring	02P 2" Dia.	BL Black	12P 120V Phase Dimming	30K 3000K
MNTL Luminous Ring		PC Chrome	27U 120-277V Universal Dimming	40K 4000K (30K Standard)
MNTF Frosted			(12P Standard)	
MNTB Bubble				

**NOVO TALL WITH
REFLECTOR RING**
Model No.
MNTR-02P-BL-12P-30K

**NOVO TALL WITH
LUMINOUS RING**
Model No.
MNTL-02P-BL-12P-30K

**NOVO TALL WITH
FROSTED DIFFUSER**
Model No.
MNTF-02P-BL-12P-30K

**NOVO TALL WITH
BUBBLE DIFFUSER**
Model No.
MNTB-02P-BL-12P-30K

To use these pendants with Multi-Port Canopies and Systems, use model numbers on pgs. 124-127

3" Globe
Matte Black finish with
Bubble light guide




3" BUBBLE
Model No.
MGSB-05P-PC-12P-30K



3" CLEAR
Model No.
MGSC-05P-PC-12P-30K





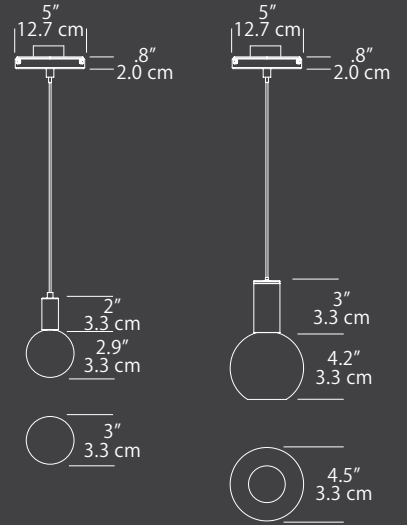

3" FROSTED
Model No.
MGSF-05P-PC-12P-30K



Ordering Guide

3" GLOBE PENDANT

Series	Size	Finish	Volts/ Dimming	Color Temp.
	03P			
MGSB Bubble	03P 3" Dia.	BL Black	12P 120V Phase Dimming	30K 3000K
MGSC Clear		PC Chrome	27U 120-277V Universal Dimming	40K 4000K
MGSF Frosted				(30K Standard)

(12P Standard)

To use these pendants with Multi-Port Canopies and Systems, use model numbers on pgs. 124-127

Fixture Wattage: 3 Watts
Fixture Output: 170 Lumens



5" Globe
Matte Black finish
Clear light guide



5" CLEAR
Model No.
MGLC-05P-BL-12P-30K

GLOBE PENDANT

Features

- Screw-in optical acrylic light guide
- Suspends from adjustable 144" cable
- Cutting and splicing are not required
- Excess cable stays coiled inside stamped steel canopy
- Driver located on top of canopy and mounts inside junction box.
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120VAC 50/60Hz
- Dimming: Phase dimming (TRIAC or ELV)
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to 4000K/ 90CRI
- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)

Ordering Guide

5" GLOBE PENDANT

Series	Size	Finish	Volts/ Dimming	Color Temp.
■	– 05P –	■	– ■ –	■
MGLC Clear	05P 5" Dia.	BL Black	12P 120V Phase Dimming	30K 3000K
		PC Chrome	27U 120-277V Universal Dimming	40K 4000K
				(30K Standard)
				(12P Standard)

Fixture Wattage: 5 Watts
Fixture Output: 400 Lumens



3" Color Gel
Matte Black finish
Red trim ring



COLOR GEL PENDANT

Features

- Hand made of pure translucent colored resin
- Suspends from adjustable 144" cable
- Cutting and splicing are not required
- Excess cable winds up inside stamped steel canopy
- Driver located on top of canopy and mounts inside junction box.
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120VAC 50/60Hz
- Dimming: Phase dimming (TRIAC or ELV)
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to 4000K/ 90CRI
- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)

Ordering Guide

COLOR GEL PENDANT

Series	Size	Finish	Volts/ Dimming	Color Temp.
MCGB	03P	BL	12P	30K
Blue	3" Dia.	Black	120V Phase Dimming	3000K
MCGG		PC	27U	40K
Green		Chrome	120-277V Universal Dimming	4000K
MCGR		Red		(30K Standard)

(12P Standard)

Fixture Wattage: 3 Watts
Fixture Output: 170 Lumens



BLUE
Model No.
MCGB-03P-BL-12P-30K
Height 1"




GREEN
Model No.
MCGG-03P-BL-12P-30K
Height 1"



RED
Model No.
MCGR-03P-BL-12P-30K
Height 1"

To use these pendants with Multi-Port Canopies and Systems, use model numbers on pgs. 124-127

3" Artisan Ring
Matte Black finish
Red trim ring

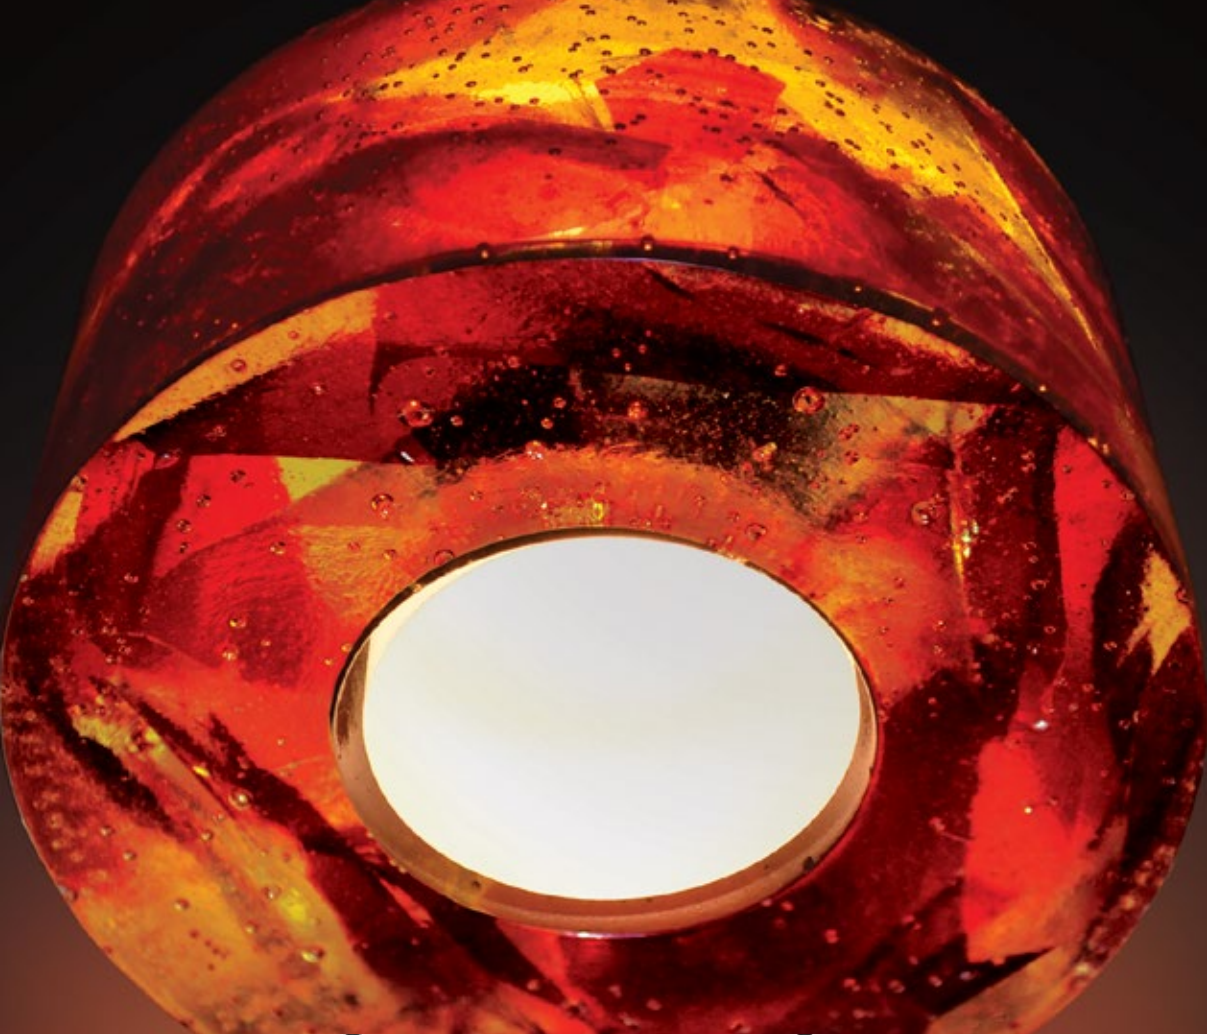

BLUE
Model No.
MARB-03P-BL-12P-30K
Height 1"



RED
Model No.
MARR-03P-BL-12P-30K
Height 1"

ARTISAN RING PENDANT

Features

- Hand made cast multi-colored 3" resin ring
- Suspends from adjustable 144" cable
- Cutting and splicing are not required
- Excess cable stays coiled inside stamped steel canopy
- Driver located on top of canopy and mounts inside junction box.
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120VAC 50/60Hz
- Dimming: Phase dimming (TRIAC or ELV)
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to 4000K/ 90CRI
- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)

Ordering Guide

ARTISAN RING PENDANT

Series	Size	Finish	Volts/ Dimming	Color Temp.
03P	3" Dia.	BL Black	12P 120V Phase Dimming	30K 3000K
MARB Blue		PC Chrome	27U 120-277V Universal Dimming	40K 4000K
MARR Red				(30K Standard)

(12P Standard)

Fixture Wattage: 3 Watts
Fixture Output: 170 Lumens



1" Light Guide
Polished Chrome with
Gradient Light Guide



MUSHROOM

Model No.

MLMU-01P-PC-12P-30K
Light Guide Height 1"



SHORT FROSTED

Model No.

MLSF-01P-PC-12P-30K
Light Guide Height 1"



TALL CLEAR

Model No.

MLTC-01P-PC-12P-30K
Light Guide Height 5"



BUBBLE

Model No.


MLBU-01P-PC-12P-30K
Light Guide Height 5"



FILAMENT

Model No.

MLFL-01P-PC-12P-30K
Light Guide Height 5"

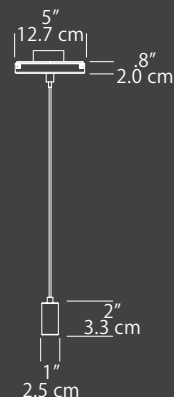

Ordering Guide

LIGHT GUIDE PENDANT

Series	Size	Finish	Volts/ Dimming	Color Temp.
■	01P	■	■	■
MLMU Mushroom	01P 1" Dia.	BL Black	12P 120V Phase Dimming	30K 3000K
MLSF Short Frosted		PC Chrome	27U 120-277V Universal Dimming	40K 4000K (30K Standard)
MLTC Tall Clear			(12P Standard)	
MLBU Bubbles				
MLFL Filament				

Fixture Wattage: 3 Watts
Fixture Output: 170 Lumens



3" Light Guide
Matte Black finish with
A-Lamp Light Guide



GRADIENT
Model No.
MLGR-01P-PC-12P-30K
Light Guide Height 7"



CANDLE
Model No.
MLCA-01P-PC-12P-30K
Light Guide Height 5"



A-LAMP
Model No.
MLAL-03P-PC-12P-30K
Light Guide Height 4"

LIGHT GUIDE PENDANT

Features

- Screw-in, decorative optical acrylic light guides
- Suspends from adjustable 144" cable
- Cutting and splicing are not required
- Excess cable stays coiled inside stamped steel canopy
- Driver located on top of canopy and mounts inside junction box.
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120VAC 50/60Hz
- Dimming: Phase dimming (TRIAC or ELV)
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to 4000K/ 90CRI
- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)

Ordering Guide

LIGHT GUIDE PENDANT

Series	Size	Finish	Volts/ Dimming	Color Temp.
MLGR	01P	BL	12P	30K
Gradient	1" Dia.	Black	120V Phase Dimming	3000K
MLCA	03P	PC	27U	40K
Candle	3" Dia.	Chrome	120-277V Universal Dimming	4000K
MLAL	03P	PC	12P	30K
A-Lamp	(for A-Lamp)	Chrome	120-277V Universal Dimming	3000K (30K Standard)

(12P Standard)

Fixture Wattage: 3 Watts
Fixture Output: 170 Lumens



To use these pendants with Multi-Port Canopies and Systems, use model numbers on pgs. 124-127

14" Nano Sconce
Satin Nickel





SURFACE

36" Milo Vanity
Satin Nickel



MILO

Features


- Stamped Steel construction
- Vanity can mount vertical or horizontal, wall or ceiling
- Frosted acrylic tube diffuser
- Driver behind backplate
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120VAC 50/60Hz
- Dimming: TRIAC dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com




Custom

- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)

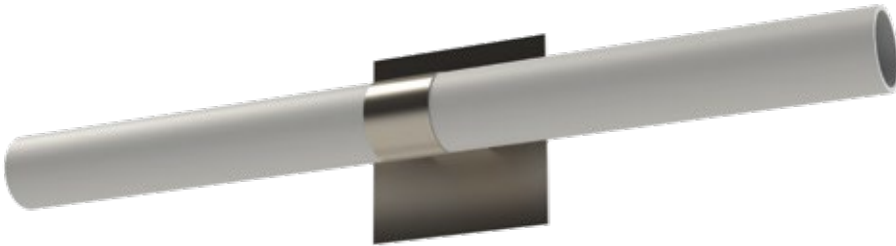

• See pg. 112 for details on the matching Milo Sconce

A tubular frosted acrylic diffuser paired with a stamped steel back plate in Satin Nickel adds contemporary styling with a fracture resistant diffuser and exceptional value.

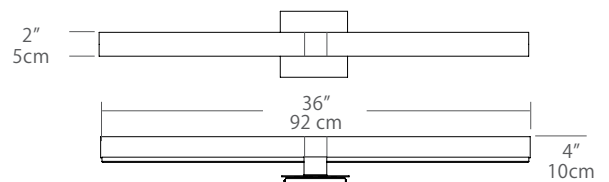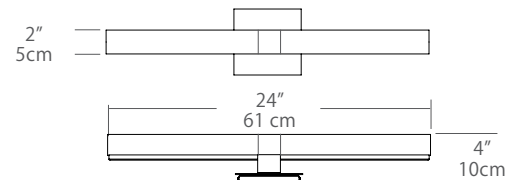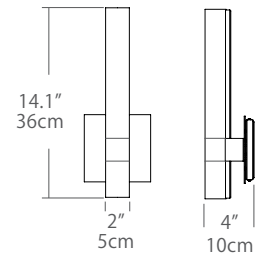

14" MILO SCONCE

Model No. MLO-14S-SN-12T-30K

(Satin Nickel)

Fixture Watts: 10 Watts

Fixture Output: 917 Lumens

24" MILO VANITY

Model No. MLO-24V-SN-12T-30K

(Satin Nickel)

Fixture Watts: 21 Watts

Fixture Output: 1140 Lumens

36" MILO VANITY

Model No. MLO-36V-SN-12T-30K

(Satin Nickel)


Fixture Watts: 21 Watts

Fixture Output: 1300 Lumens

36" Nano Vanity
Polished Chrome



Available Finishes



Polished
Chrome



Satin
Nickel

NANO

Features


- Stamped Steel construction
- Vanity can mount vertical or horizontal, wall or ceiling
- Crystal clear acrylic diffuser with a frosted front face
- Driver located in back plate
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120VAC 50/60Hz
- Dimming: TRIAC dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)

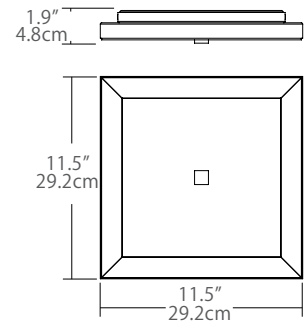



12" NANO FLUSH MOUNT

Model No. NAN-12F-SN-12T-30K
(Satin Nickel)

Model No. NAN-12F-PC-12T-30K
(Polished Chrome)

Fixture Watts: 21 Watts

Fixture Output: 1000 Lumens

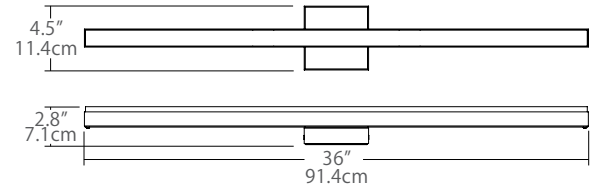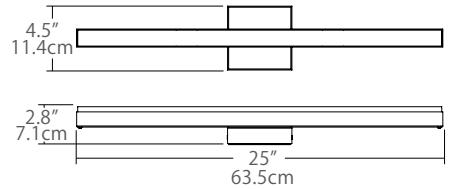

25" NANO VANITY

Model No. NAN-25V-SN-12T-30K
(Satin Nickel)

Model No. NAN-25V-PC-12T-30K
(Polished Chrome)

Fixture Watts: 22 Watts

Fixture Output: 1040 Lumens

36" NANO VANITY

Model No. NAN-36V-SN-12T-30K
(Satin Nickel)

Model No. NAN-36V-PC-12T-30K
(Polished Chrome)

Fixture Watts: 28 Watts

Fixture Output: 1280 Lumens



- See pg.113 for details on the matching Nano Sconce

Nano flush mount and vanity lights represent extraordinary value. Super efficient LED light sources inside minimal geometric forms illuminate white frosted acrylic diffusers. Dimmable and damp location rated.

24" Lino Vanity
Satin Nickel



LINO

Features

- Stamped Steel construction
- Vanity can mount vertical or horizontal, wall or ceiling
- Frosted glass tube diffuser
- Driver behind backplate
- Damp location rated


Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120VAC 50/60Hz
- Dimming: TRIAC dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)

A tubular frosted glass diffuser paired with a stamped steel back plate in Satin Nickel adds contemporary styling to a new value-priced vanity and wall sconce.

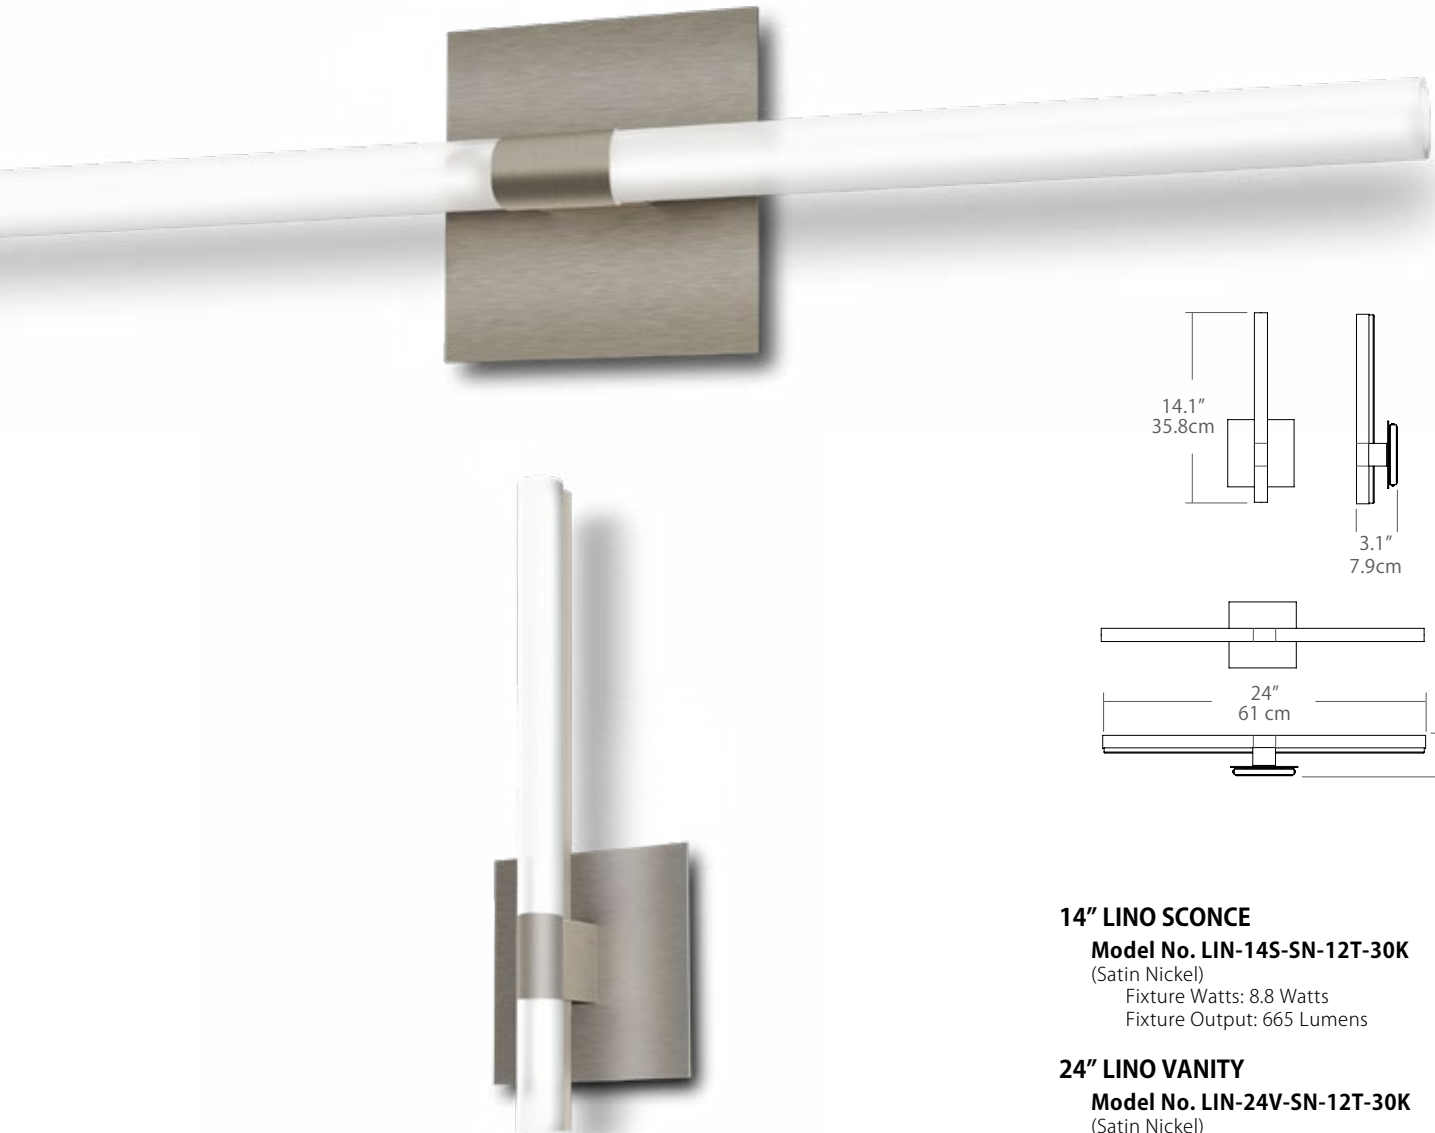

• See pg. 114 for details on the matching Lino Sconce

14" LINO SCNCE

Model No. LIN-14S-SN-12T-30K
(Satin Nickel)

Fixture Watts: 8.8 Watts
Fixture Output: 665 Lumens

24" LINO VANITY

Model No. LIN-24V-SN-12T-30K
(Satin Nickel)

Fixture Watts: 10.4 Watts
Fixture Output: 893 Lumens



25" Frost Vanity
Satin Nickel



FROST

Features


- Stamped Steel construction
- Vanity can mount vertical or horizontal, wall or ceiling
- Textured glass diffuser
- Replaceable light source
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120VAC 50/60Hz
- Dimming: TRIAC dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)

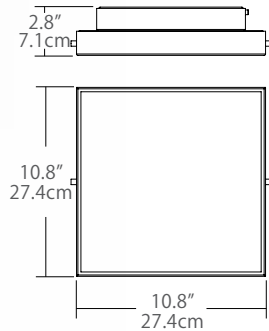


11" FROST FLUSH MOUNT

Model No. FRS-11F-SN-12T-30K

(Satin Nickel)

Fixture Watts: 21 Watts

Fixture Output: 1440 Lumens

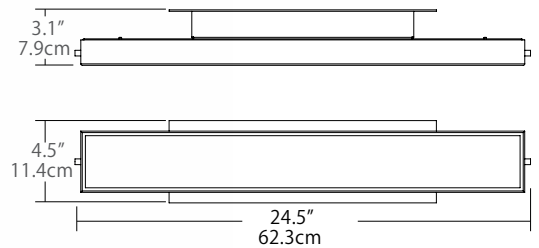

25" FROST VANITY

Model No. FRS-25V-SN-12T-30K

(Satin Nickel)

Fixture Wattage: 22 Watts

Fixture Output: 1807 Lumens

Frost Vanity and Flush Mount are well-priced options with quality features. Sparkling glass diffusers and glistening metal components make the most of super efficient LED light sources.

24" Equis Vanity
Polished Chrome



EQUIS

Features


- Stamped Steel construction
- Mount vertical or horizontal, wall or ceiling
- Real linen embedded in acrylic diffuser
- Replaceable light source
- Driver inside backplate
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120VAC 50/60Hz
- Dimming: TRIAC dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)

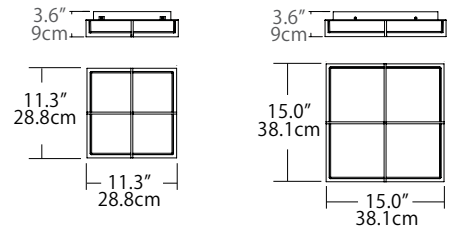

11" EQUIS FLUSH MOUNT


Model No. EQS-11F-PC-12T-30K
(Polished Chrome)

Fixture Wattage: 22.7 Watts
Fixture Output: 1386 Lumens

15" EQUIS FLUSH MOUNT

Model No. EQS-15F-PC-12T-30K
(Polished Chrome)

Fixture Wattage: 43.2 Watts
Fixture Output: 2863 Lumens

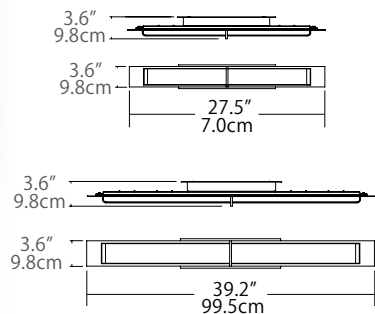

28" EQUIS VANITY

Model No. EQS-28V-PC-12T-30K
(Polished Chrome)

Fixture Wattage: 22 Watts
Fixture Output: 1383 Lumens

39" EQUIS VANITY

Model No. EQS-39V-PC-12T-30K
(Polished Chrome)

Fixture Wattage: 29 Watts
Fixture Output: 2173 Lumens

• See pg. 115 for details on the matching Equis Sconce

Simple geometry can create memorable forms. Sleek laser-cut metal bands intersect the flush mount or vertically "divide" the vanity up the middle. Linen-embedded diffusers ensure bright, glare-free light.

36" Cube Vanity
Polished Chrome



CUBE

Features


- Chrome plated steel housing and trim ring
- Mount vertical or horizontal, wall or ceiling
- Opal white acrylic diffuser
- Replaceable light source
- Damp location rated
- Driver located in canopy housing

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120VAC 50/60Hz
- Dimming: TRIAC dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)

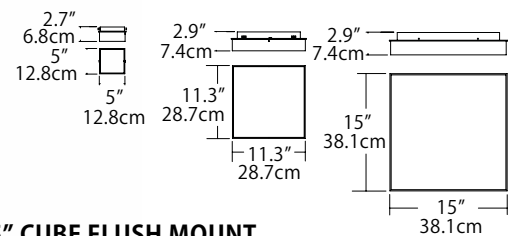

5" CUBE FLUSH MOUNT

Model No. CUB-05F-PC-12T-30K

(Polished Chrome)

Fixture Wattage: 16 Watts

Fixture Output: 786 Lumens (83 CRI)

11" CUBE FLUSH MOUNT

Model No. CUB-11F-PC-12T-30K

(Polished Chrome)

Fixture Wattage: 22 Watts

Fixture Output: 1336 Lumens


15" CUBE FLUSH MOUNT

Model No. CUB-15F-PC-12T-30K

(Polished Chrome)

Fixture Wattage: 43 Watts

Fixture Output: 2687 Lumens

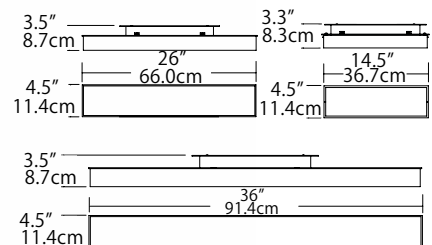

12" CUBE VANITY

Model No. CUB-12V-PC-12T-30K

(Polished Chrome)

Fixture Wattage: 22 Watts

Fixture Output: 914 Lumens

24" CUBE VANITY

Model No. CUB-24V-PC-12T-30K

(Polished Chrome)

Fixture Wattage: 22 Watts

Fixture Output: 1450 Lumens

36" CUBE VANITY

Model No. CUB-36V-PC-12T-30K

(Polished Chrome)

Fixture Wattage: 29 Watts

Fixture Output: 2629 Lumens

An ideal choice for any space that calls for a minimal, neutral design, the versatile Cube Series offers unlimited lighting solutions.



QUADRA VANITY

Features


- Stamped Polished Stainless Steel construction
- Mount vertical or horizontal, wall or ceiling
- Replaceable light source
- Damp location rated

Specifications


- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120VAC 50/60Hz
- Dimming: TRIAC dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)

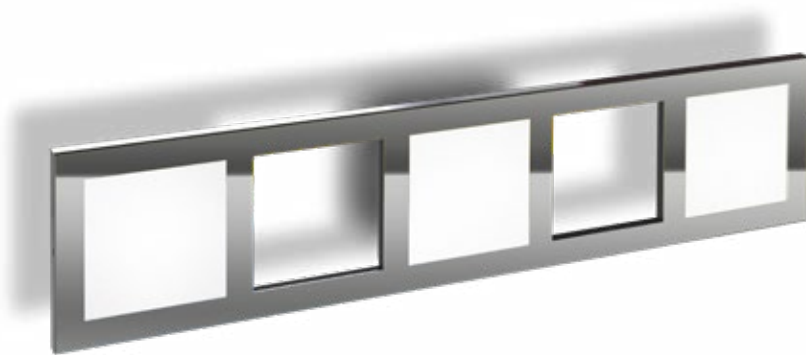

Following in the footsteps of our Quadra Linear Pendant, this super-slim vanity pumps out warm, glare-free light.

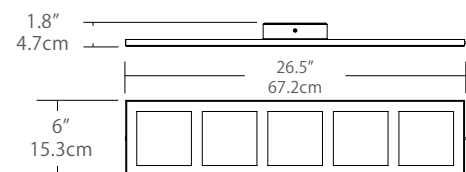

26" QUADRA VANITY

Model No. QDR-26V-PC-12T-30K
(Polished Chrome)

Fixture Wattage: 26 Watts
Fixture Output: 1591 Lumens





BOUNCE VANITY

Features


- Stamped Steel construction
- Mount vertical or horizontal, wall or ceiling
- Highly reflective curved steel back plate behind
- LEDs creates wide-spread, low-glare illumination
- Damp location rated
- Driver partially located in junction box behind fixture

Specifications


- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120VAC 50/60Hz
- Dimming: TRIAC dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)

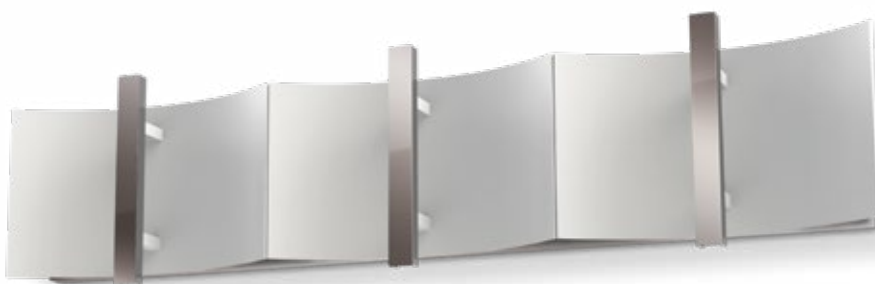

Our Bounce Vanity is our new design concept. A curved, highly reflective back plate behind rows of LEDs sends a wide spread of reflected illumination that's just the right color temperature and brightness.

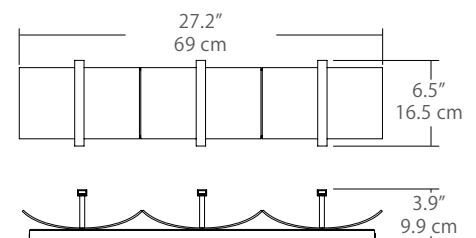

27" BOUNCE VANITY

Model No. BNC-27V-SN-12T-30K

(Satin Nickel)

Fixture Watts: 21 Watts

Fixture Output: 1815 Lumens

15" Halos
Satin Nickel



HALOS FLUSH MOUNT

Features


- Stamped Steel construction
- Mount wall or ceiling
- Frosted Glass front diffuser
- Sleek minimal design complements most décor
- Driver located behind housing
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120VAC 50/60Hz
- Dimming: TRIAC dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)

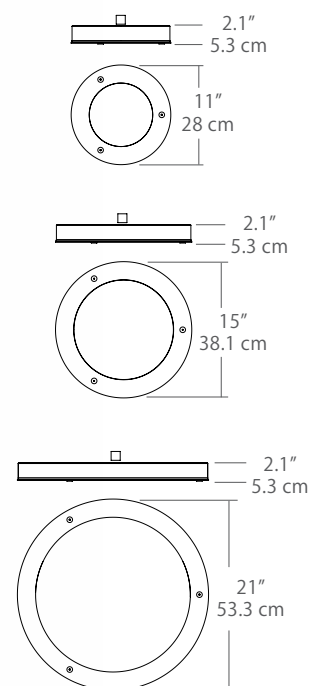

A practical flush mount has a pleasing shape and simple, clean lines. This modern design provides brilliant, even illumination ranging from 820 to 1750 Lumens. Available in three sizes.

11" HALOS ROUND FLUSH MOUNT

Model No. HAL-11F-SN-12T-30K
(Satin Nickel)

Fixture Watts: 16 Watts
Fixture Output: 820 Lumens

15" HALOS ROUND FLUSH MOUNT

Model No. HAL-15F-SN-12T-30K
(Satin Nickel)

Fixture Watts: 21 Watts
Fixture Output: 1125 Lumens

21" HALOS ROUND FLUSH MOUNT

Model No. HAL-21F-SN-12T-30K
(Satin Nickel)

Fixture Watts: 30 Watts
Fixture Output: 1750 Lumens



12" Quadra Flush Mount
Polished Chrome



QUADRA FLUSH MOUNT

Features


- Polished Chrome with Stamped Stainless Steel trim
- Mount wall or ceiling
- White Diffuser
- Replaceable edge-lit panel light source
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120VAC 50/60Hz
- Dimming: TRIAC dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)

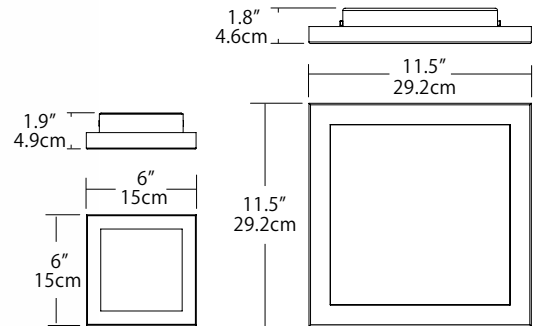

12" Quadra Flush Mount
Polished Chrome

6" Quadra Flush Mount
Polished Chrome

Size and style options make our Quadra Flush Mount as versatile as it gets. A choice of two sizes creates different looks from one great edge lit design.

6" QUADRA FLUSH MOUNT

Model No. QDR-06F-PC-12T-30K
(Polished Chrome)

Fixture Wattage: 9.5 Watts
Fixture Output: 508 Lumens

12" QUADRA FLUSH MOUNT

Model No. QDR-12F-PC-12T-30K
(Polished Chrome)

Fixture Wattage: 31 Watts
Fixture Output: 1651 Lumens



16" Grid Flush Mount
Brushed Aluminium



GRID FLUSH MOUNT

Features


- Brushed Aluminium finish
- Mount wall or ceiling
- 1/4" thick glossy high-grade acrylic trim with integrated white diffuser on back
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 4000K OR 2700K
- Input Voltage: 120VAC 50/60Hz
- Dimming: TRIAC dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Available in 2700K or 4000K color temperatures

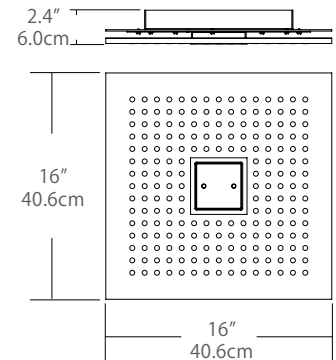

Grid's super slim design features rows of LEDs that form a pleasing pattern and fill a room with bright, even illumination.

16" GRID FLUSH MOUNT

Model No: GRD-16F-BA-12T-40K
(4000K Cool White/ 90 CRI)

Model No: GRD-16F-BA-12T-27K
(2700K Warm White/ 90 CRI)

Fixture Wattage: 47 Watts
Fixture Output: 3000 Lumens (4000K)





• See pg. 93 for details on the matching Milo Vanity

MILO SCONCE

Features


- Stamped Steel construction
- Frosted acrylic tube diffuser
- Driver behind backplate
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120VAC 50/60Hz
- Dimming: TRIAC dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)

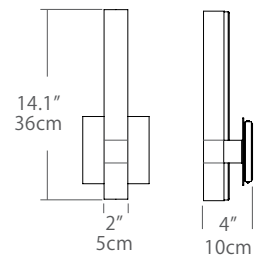

14" MILO SCONCE

Model No. MLO-14S-SN-12T-30K

(Satin Nickel)

Fixture Watts: 12 Watts

Fixture Output: 890 Lumens





NANO SCONCE

Features

- Stamped Steel construction
- Crystal clear acrylic diffuser with a frosted front face
- Driver located in back plate
- Damp location rated

Specifications


- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120VAC 50/60Hz
- Dimming: TRIAC dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)



• See pg. 95 for details on the matching Nano series

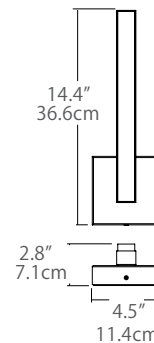

14" NANO SCONCE

Model No. NAN-14S-SN-12T-30K
(Satin Nickel)

Model No. NAN-14S-PC-12T-30K
(Polished Chrome)

Fixture Watts: 14 Watts
Fixture Output: 757 Lumens





• See pg. 97 for details on the matching Lino series

LINO SCNCE

Features


- Stamped Steel construction
- Frosted glass tube diffuser
- Driver behind backplate
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120VAC 50/60Hz
- Dimming: TRIAC dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)

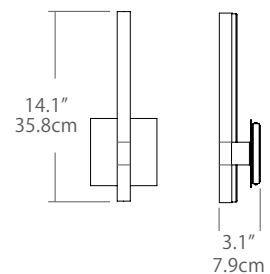

14" LINO SCNCE

Model No. LIN-14S-SN-12T-30K
(Satin Nickel)

Fixture Watts: 10 Watts
Fixture Output: 917 Lumens





EQUIS SCONCE

Features

- Stamped Steel construction
- Real linen embedded in acrylic diffuser
- Replaceable light source
- Driver inside backplate
- Damp location rated

Specifications


- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120VAC 50/60Hz
- Dimming: TRIAC dimmable
- For recommended dimmers and downloadable IES & LM 79 files, see blackjacklighting.com

Custom

- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)



• See pg. 101 for details on the matching Equis series

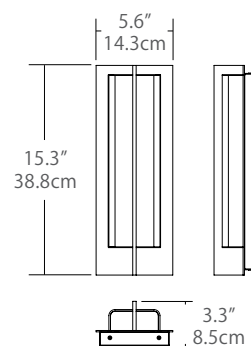

15" EQUIS SCONCE

Model No. EQS-15S-PC-12T-30K
(Polished Chrome)

Fixture Wattage: 14 Watts
Fixture Output: 715 Lumens





FLEXI TASK LAMP

Features

- Finishes include black or white
- 6" diameter round edge-lit panel
- Head swivels vertically and rotates 350 degrees
- Plug in driver located on end of cord set


Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Input Voltage: 120V- 277VAC
- Dimming: three level dimming

Custom

- Can be special ordered with USB charging port in base
- Table clamp base available as special order, consult factory for details.

Perfect for home, or office, or home-office. Flexi's head and joints rotate and move to virtually any location required, bringing light right where you need it. Strong connections ensure that once in place, Flexi stays until you want to change position.

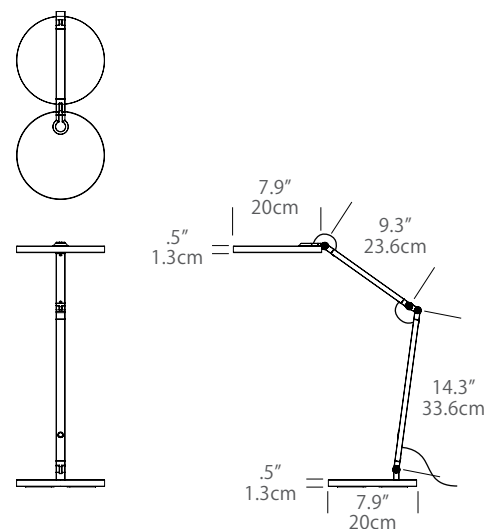

FLEXI TASK LAMP

Model No. FLX-06T-BK-22D-30K
(Black)

Model No. FLX-06T-WH-22D-30K
(White)

Fixture Wattage: 8 Watts
Fixture Output: 480 Lumens



BLACKJACK®

Edge2 Task Lamp
Satin Nickel



Available in Two Finishes

Matte Black Satin Nickel

Edge2 Task Lamp
Matte Black





EDGE2 TASK LAMP

Features


- Made of super-lightweight magnesium alloy with plated Matte Black or Satin Nickel finish
- Infinitely adjustable. A gentle touch up and down directs light exactly where it is needed
- Cord length: 6' (183cm)
- Comes with front facing USB port in base

Specifications

- Chip on board LED technology produces wide, even lumen distribution
- LED color temperature: 4000K
- Color Rendering Index: 85 CRI
- 3-position high/low switch
- 120 - 240 VAC 50/60Hz

Custom

- Consult Blackjack Lighting for custom upgrades

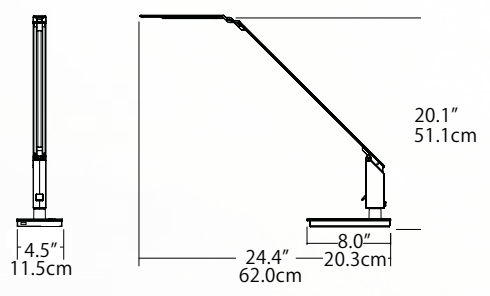

EDGE2 TASK LAMP W/ USB PORT

Model No: EG2-24T-BL

(Matte Black)

Model No: EG2-24T-SN

(Satin Nickel)

Fixture Wattage: 8 Watts

Fixture Output: 630 Lumens

EDGE2 with USB port provides wide and even lumen distribution. The Edge2's head and arm are infinitely adjustable with a light touch of a finger. Available in plated Matte Black and plated Satin Nickel.







MULTI-PORT CANOPIES + PENDANTS

MULTI-PORT ORDERING GUIDE

ORDERING STEPS:

1. Select your canopy
2. Select a faceplate finish color
3. Select the type and number of pendants to match with the selected canopy

Note that all the 2W pendants will work with any canopy.

When using 5W pendants, some canopies may require a higher wattage driver. Check the compatibility chart on each page to confirm the correct canopy model number to be ordered

The fixture will be built to your specifications

ORDERING EXAMPLE:

10" ROUND CANOPY/ 9 Port
C-MCR-1009-BL-27U-20W
(Quantity 1)

PLUS

COLOR GEL RED
P-CGR-03-BL-30K
(Quantity 9)

FIELD ADJUSTMENTS:

The custom built Multi-Port Pendant comes with a 12' length of cable secured to an adjustable gripper on the faceplate. The gripper makes it easy to adjust the cable length so that there is no cutting or splicing required during installation

CUTTING
SPlicing
**NOT
REQUIRED**



Step 1: Select your canopy

Pendants are suspended from round, linear and square ceiling canopies. Select the size, shape and number of ports of the canopy best suited to your application.



10" ROUND





20" ROUND

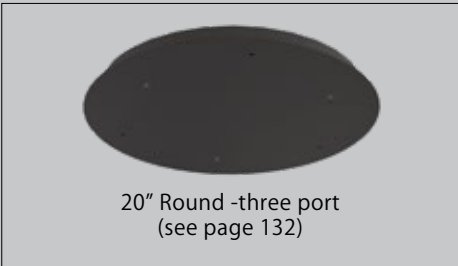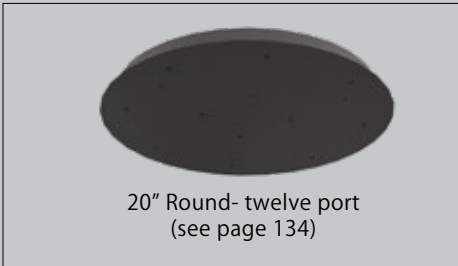



38" RECTANGLE

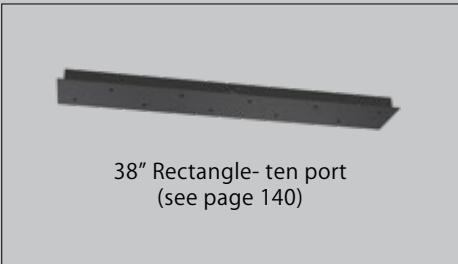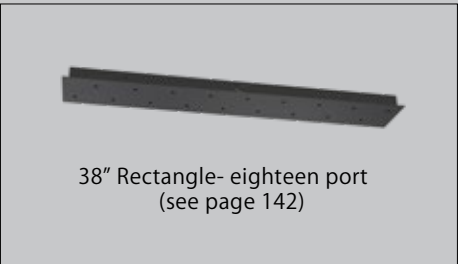

24" SQUARE

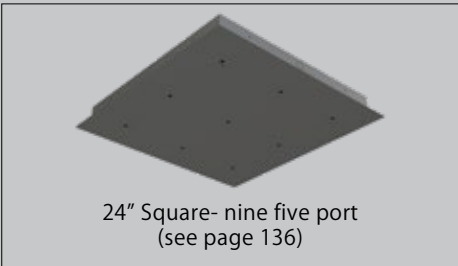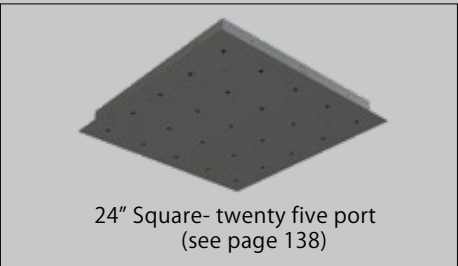



48" / 22" LINEAR

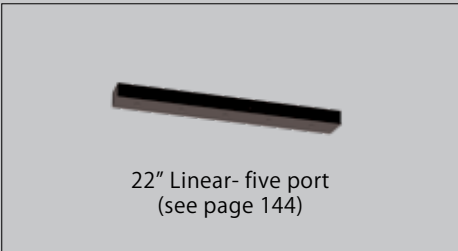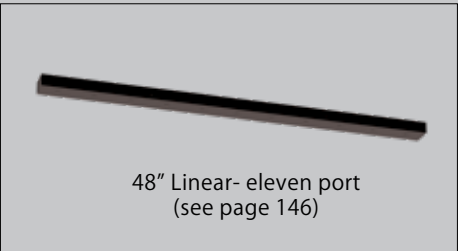


Step 2: Select your finish

Multi-port canopies are finished in Matte Black and come standard with a Polished Chrome (PC) or Matte Black (BL) faceplate.

Standard Faceplate Finishes

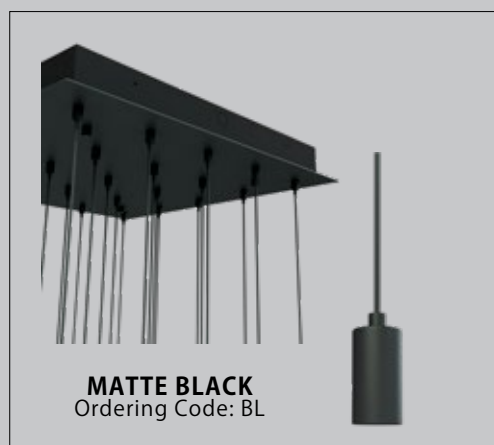
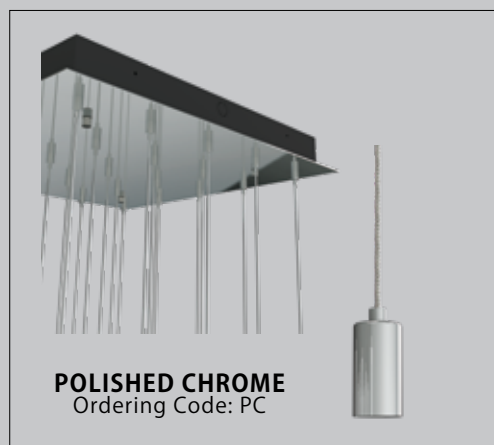


Optional Faceplate Finish

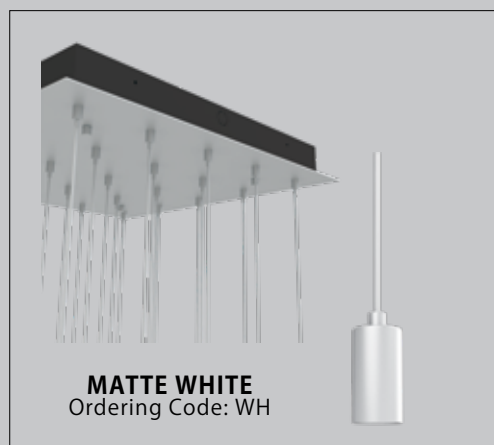

Step 3: Select your pendant

See the wide assortment of styles and sizes in the pendant families below (details are on pages 124-127). Many come in 2W (90 Lumens) and larger sizes are available in 5W (400 lumens).

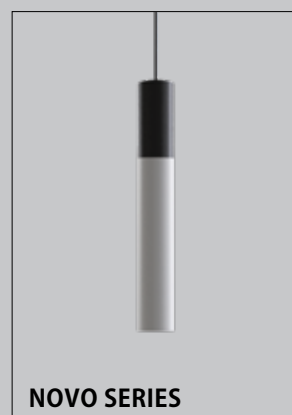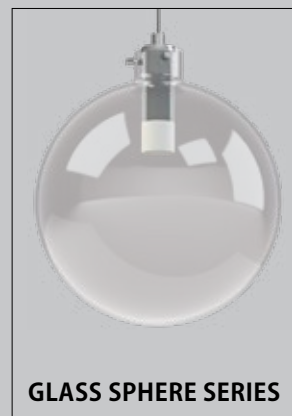

MULTI-PORT PENDANTS

Bullet 4" Series - 2W



Bullet 8" Series - 5W



Globe 3" Series - 2W



Globe 5" Series - 5W



Socket assembly available in Matte Black (BL) or Polished Chrome (PC)

Glass Sphere 8" Series - 2W



Socket assembly available in Matte Black (BL) or Polished Chrome (PC)

Features

- Suspends from adjustable 144" cable
- Cutting and splicing are not required
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Lumens: 2W = 90 Lumens
- Lumens: 5W = 400 Lumens

Custom

- Upgradable to 4000K/ 90CRI


Domos 16" Series - 5W



Pill Box 10" Series - 5W



Glass Sphere 12" Series - 5W

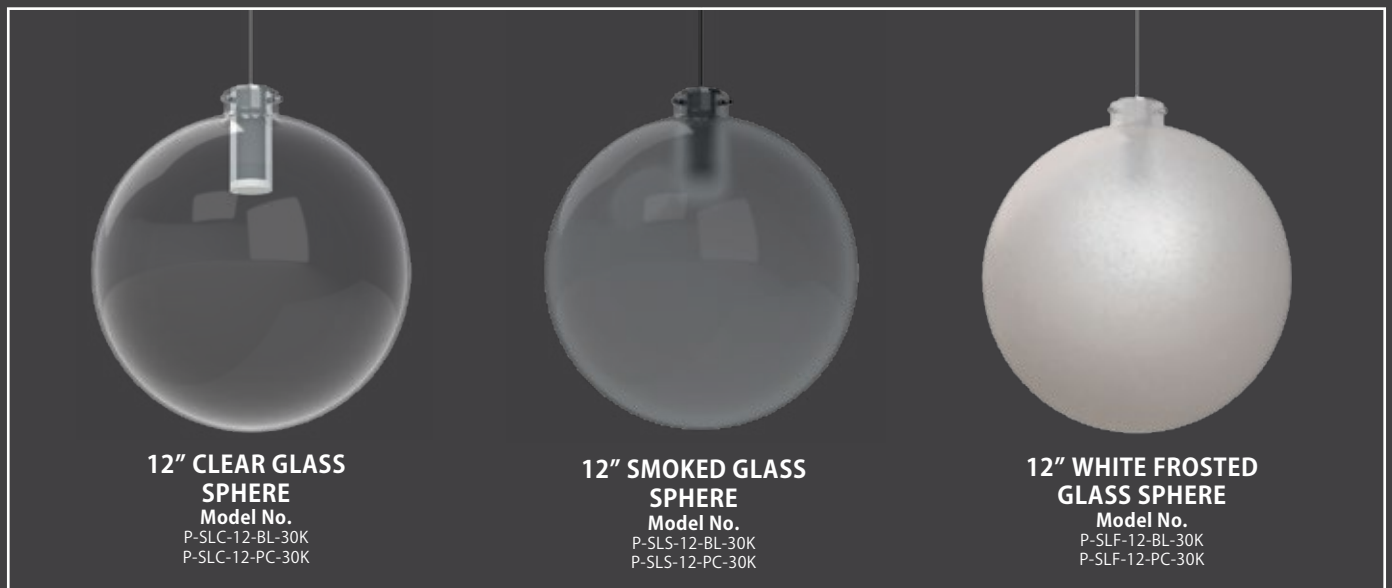

Socket assembly available in Matte Black (BL) or Polished Chrome (PC)

MULTI-PORT PENDANTS

Light Guide Series – 2W



MUSHROOM
Model No.
P-LMU-01-BL-30K
P-LMU-01-PC-30K



SHORT FROSTED
Model No.
P-LSF-01-BL-30K
P-LSF-01-PC-30K



BUBBLE
Model No.
P-LBU-01-BL-30K
P-LBU-01-PC-30K



FILAMENT
Model No.
P-LFL-01-BL-30K
P-LFL-01-PC-30K



GRADIENT
Model No.
P-LGR-01-BL-30K
P-LGR-01-PC-30K



TALL CLEAR
Model No.
P-LTC-01-BL-30K
P-LTC-01-PC-30K

Socket assembly available in Matte Black (BL) or Polished Chrome (PC)

Light Guide Series – 2W




A-LAMP
Model No.
P-LAL-03-BL-30K
P-LAL-03-PC-30K




CANDLE
Model No.
P-LCA-01-BL-30K
P-LCA-01-PC-30K

Socket assembly available in Matte Black (BL) or Polished Chrome (PC)

Velo Series – 2W



GLASS CYLINDER WITH BUBBLE
Model No.
CLEAR
P-VCB-05-BL-30K
P-VCB-05-PC-30K
SMOKED
P-VSB-05-BL-30K
P-VSB-05-PC-30K

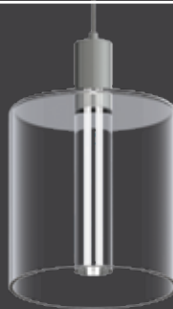

GLASS CYLINDER WITH FILAMENT
Model No.
CLEAR
P-VCF-05-BL-30K
P-VCF-05-PC-30K
SMOKED
P-VSF-05-BL-30K
P-VSF-05-PC-30K

Artisan Ring Series – 2W



Blue
Model No.
P-ARB-03-BL-30K
P-ARB-03-PC-30K



RED
Model No.
P-ARR-03-BL-30K
P-ARR-03-PC-30K

Socket assembly available in Matte Black (BL) or Polished Chrome (PC)

Color Gel Series – 2W



RED
Model No.
P-CGR-03-BL-30K
P-CGR-03-PC-30K



BLUE
Model No.
P-CGB-03-BL-30K
P-CGB-03-PC-30K



GREEN
Model No.
P-CGG-03-BL-30K
P-CGG-03-PC-30K

Features

- Suspends from adjustable 144" cable
- Cutting and splicing are not required
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Lumens: 2W = 90 Lumens
- Lumens: 5W = 400 Lumens

Custom


- Upgradable to 4000K/ 90CRI

Novo Short Series - 5W



Socket assembly available in Matte Black (BL) or Polished Chrome (PC)

Novo Tall Series - 5W

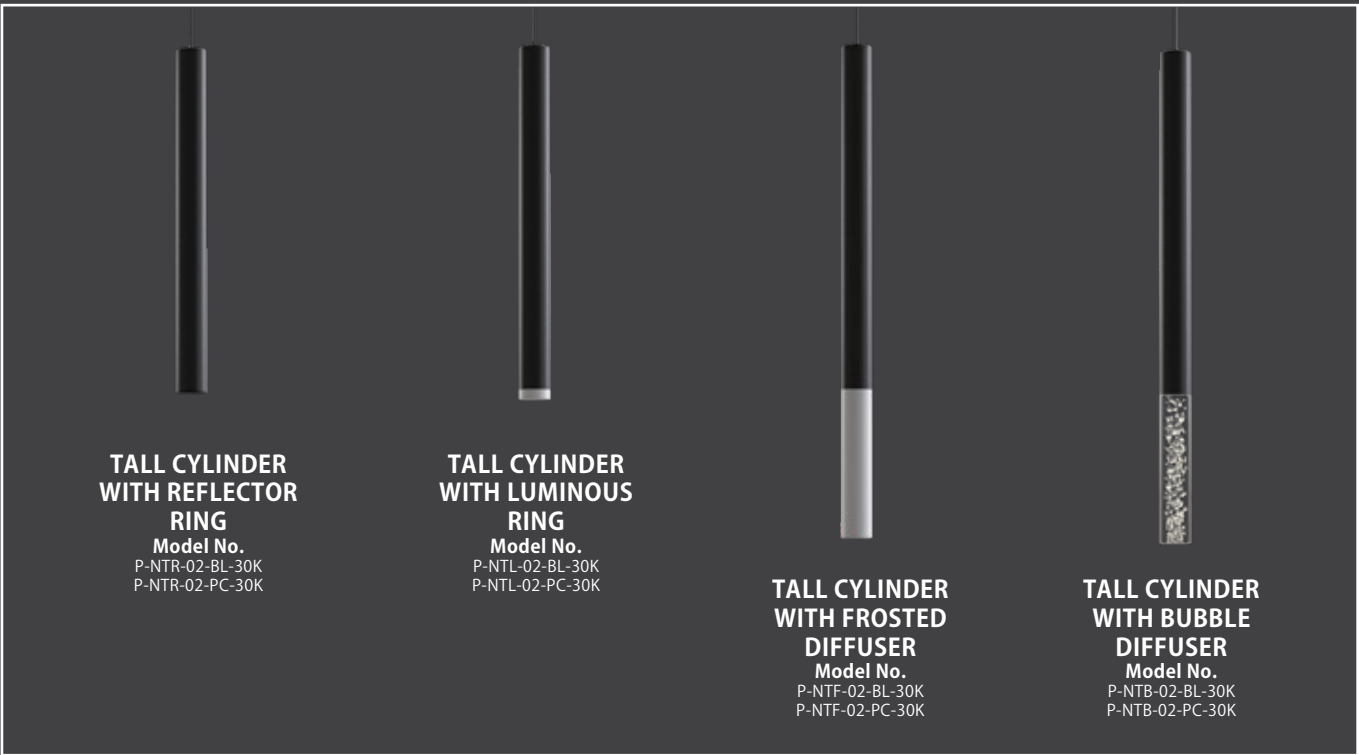

Socket assembly available in Matte Black (BL) or Polished Chrome (PC)

10" Round/ 3 Ports Canopy
Gradient Pendant
Polished Chrome



MULTI-PORT CANOPY

10" Round/ 3 Ports

Features


- Standard black or polished chrome faceplate (with a black housing)
- Canopy comes without pendants (ordered separately)
- When ordered with pendants, canopy ships with pendants assembled and pre-installed on canopy
- Fabricated steel construction
- Driver located in canopy housing
- Damp location rated

Specifications

- Input Voltage: 100-277VAC 50/60Hz
- Dimming: TRIAC, ELV or 0-10V dimmable
- Watts: 20W driver is standard for 10" canopy

Custom

- Available with white front faceplate

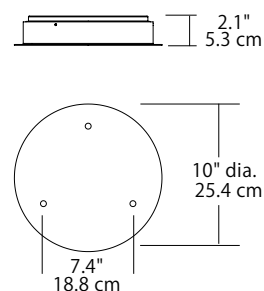

Three Port

RECOMMENDED PENDANTS



Pendants to be ordered separately
(see pages 124-127 for full assortment)

DRIVER COMPATIBILITY

Pendant Series	Watts	Driver
Light Guide Series	2W	20W
Color Gel Series	2W	20W
Artisan Ring Series	2W	20W
Velo Glass Series	2W	20W
Globe 3" Series	2W	20W
Globe 5" Series	5W	20W
Bullet 4" Series	2W	20W
Bullet 8" Series	5W	20W
Sphere 8" Series	2W	20W
Sphere 12" Series	5W	20W
Novo Tall Series	5W	20W
Novo Short Series	5W	20W
Pill Box 10" Series	5W	20W
Domos 16" Series	5W	20W

10" MULTI-PORT ROUND CANOPY/ 3 Port

Model No. C-MCR-1003-BL-27U-20W
(Matte Black/ 20W/ 3 ports)

Model No. C-MCR-1003-PC-27U-20W
(Polished Chrome/ 20W/ 3 ports)



10" Round/ 9 Ports
Candle Pendant
Matte Black



MULTI-PORT CANOPY

10" Round/ 9 Ports



Features


- Standard black or polished chrome faceplate (with a black housing)
- Canopy comes without pendants (ordered separately)
- When ordered with pendants, canopy ships with pendants assembled and pre-installed on canopy
- Fabricated steel construction
- Driver located in canopy housing
- Damp location rated

Specifications

- Input Voltage: 100-277VAC 50/60Hz
- Dimming: TRIAC, ELV or 0-10V dimmable
- Watts: 20W driver is standard for 10" canopy

Custom

- Available with white front faceplate
- Available with 60W or higher wattage driver

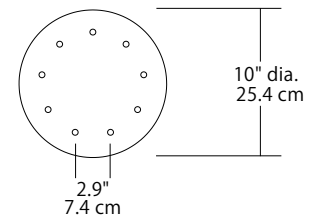

Nine Port

RECOMMENDED PENDANTS



Pendants to be ordered separately
(see pages 124-127 for full assortment)

DRIVER COMPATIBILITY

Pendant Series	Watts	Driver
Light Guide Series	2W	20W
Color Gel Series	2W	20W
Artisan Ring Series	2W	20W
Velo Glass Series	2W	20W
Globe 3" Series	2W	20W
Globe 5" Series	5W	60W
Bullet 4" Series	2W	20W
Bullet 8" Series	5W	60W
Sphere 8" Series	2W	20W
Sphere 12" Series	5W	60W
Novo Tall Series	5W	60W
Novo Short Series	5W	60W
Pill Box 10" Series	5W	60W
Domos 16" Series	5W	60W

10" MULTI-PORT ROUND CANOPY/ 9 Port

Model No. C-MCR-1009-BL-27U-20W
(Matte Black/ 20W/ 9 ports)

Model No. C-MCR-1009-BL-27U-60W
(Matte Black/ 60W/ 9 ports)

Model No. C-MCR-1009-PC-27U-20W
(Polished Chrome/ 20W/ 9 ports)


Model No. C-MCR-1009-PC-27U-60W
(Polished Chrome/ 60W/ 9 ports)

20" Round/ 3 Ports
12" Smoked Glass Sphere Pendant
Matte Black



MULTI-PORT CANOPY

20" Round/ 3 Ports

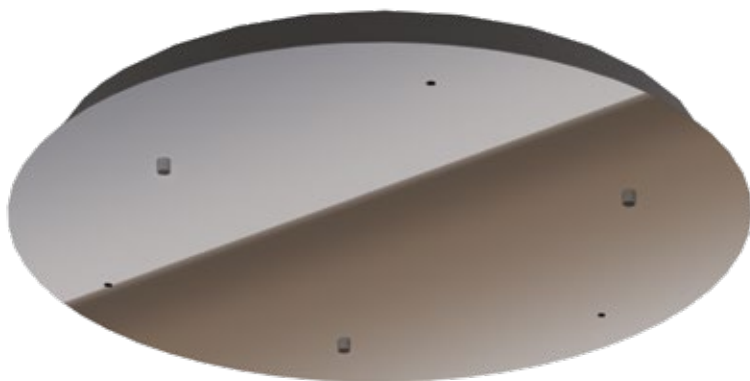

Features


- Standard black or polished chrome faceplate (with a black housing)
- Canopy comes without pendants (ordered separately)
- When ordered with pendants, canopy ships with pendants assembled and pre-installed on canopy
- Fabricated steel construction
- Driver located in canopy housing
- Damp location rated

Specifications

- Input Voltage: 100-277VAC 50/60Hz
- Dimming: TRIAC, ELV or 0-10V dimmable
- Watts: 20W driver is standard for 20" canopy

Custom

- Available with white front faceplate

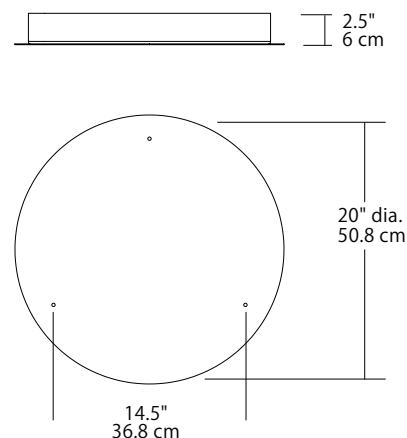

Three Port

RECOMMENDED PENDANTS



Pendants to be ordered separately
(see pages 124-127 for full assortment)

DRIVER COMPATIBILITY

Pendant Series	Watts	Driver
Light Guide Series	2W	20W
Color Gel Series	2W	20W
Artisan Ring Series	2W	20W
Velo Glass Series	2W	20W
Globe 3" Series	2W	20W
Globe 5" Series	5W	20W
Bullet 4" Series	2W	20W
Bullet 8" Series	5W	20W
Sphere 8" Series	2W	20W
Sphere 12" Series	5W	20W
Novo Tall Series	5W	20W
Novo Short Series	5W	20W
Pill Box 10" Series	5W	20W
Domos 16" Series	5W	20W

20" MULTI-PORT ROUND CANOPY/ 3 Port

Model No. C-MCR-2003-BL-27U-20W
(Matte Black/ 20W/ 3 ports)

Model No. C-MCR-2003-PC-27U-20W
(Polished Chrome/ 20W/ 3 ports)



4" Bullet Shade Pendant
Matte White



MULTI-PORT CANOPY

20" Round/ 12 Ports



Features


- Standard black or polished chrome faceplate (with a black housing)
- Canopy comes without pendants (ordered separately)
- When ordered with pendants, canopy ships with pendants assembled and pre-installed on canopy
- Fabricated steel construction
- Driver located in canopy housing
- Damp location rated

Specifications

- Input Voltage: 100-277VAC 50/60Hz
- Dimming: TRIAC, ELV or 0-10V dimmable
- Watts: 20W driver is standard for 20" canopy

Custom

- Available with white front faceplate
- Available with 96W or higher wattage driver

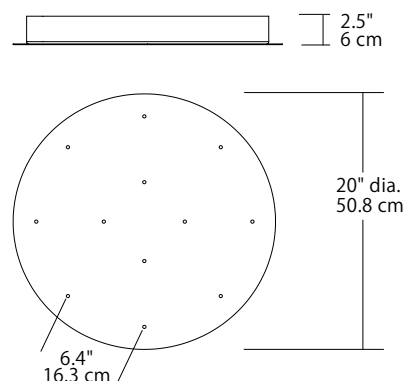

Twelve Port

RECOMMENDED PENDANTS



Pendants to be ordered separately
(see pages 124-127 for full assortment)

DRIVER COMPATIBILITY

Pendant Series	Watts	Driver
Light Guide Series	2W	20W
Color Gel Series	2W	20W
Artisan Ring Series	2W	20W
Velo Glass Series	2W	20W
Globe 3" Series	2W	20W
Globe 5" Series	5W	96W
Bullet 4" Series	2W	20W
Bullet 8" Series	5W	96W
Sphere 8" Series	2W	20W
Sphere 12" Series	5W	NR
Novo Tall Series	5W	96W
Novo Short Series	5W	96W
Pill Box 10" Series	5W	NR
Domos 16" Series	5W	NR

NR (Not Recommended)

20" MULTI-PORT ROUND CANOPY/ 12 Port

Model No. C-MCR-2012-BL-27U-20W
(Matte Black/ 20W/ 12 ports)

Model No. C-MCR-2012-BL-27U-96W
(Matte Black/ 96W/ 12 ports)

Model No. C-MCR-2012-PC-27U-20W
(Polished Chrome/ 20W/ 12 ports)

Model No. C-MCR-2012-PC-27U-96W
(Polished Chrome/ 96W/ 12 ports)

24" Square/ 9 Ports
Velo Glass Shade Pendant
Matte Black



MULTI-PORT CANOPY

24" Square/ 9 Ports

Features


- Standard black or polished chrome faceplate (with a black housing)
- Canopy comes without pendants (ordered separately)
- When ordered with pendants, canopy ships with pendants assembled and pre-installed on canopy
- Fabricated steel construction
- Driver located in canopy housing
- Damp location rated

Specifications

- Input Voltage: 100-277VAC 50/60Hz
- Dimming: TRIAC, ELV or 0-10V dimmable
- Watts: 20W driver is standard for 24" canopy

Custom

- Available with white front faceplate
- Available with 60W or higher wattage driver

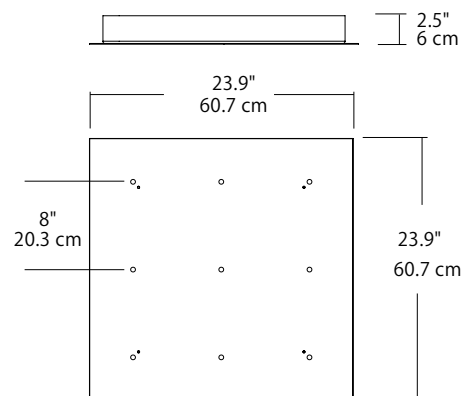

Nine Port

RECOMMENDED PENDANTS



Pendants to be ordered separately
(see pages 124-127 for full assortment)

DRIVER COMPATIBILITY

Pendant Series	Watts	Driver
Light Guide Series	2W	20W
Color Gel Series	2W	20W
Artisan Ring Series	2W	20W
Velo Glass Series	2W	20W
Globe 3" Series	2W	20W
Globe 5" Series	5W	60W
Bullet 4" Series	2W	20W
Bullet 8" Series	5W	60W
Sphere 8" Series	2W	20W
Sphere 12" Series	5W	60W
Novo Tall Series	5W	60W
Novo Short Series	5W	NR
Pill Box 10" Series	5W	NR
Domos 16" Series	5W	NR

NR (Not Recommended)

24" MULTI-PORT SQUARE CANOPY/ 9 Port

Model No. C-MCS-2409-BL-27U-20W
(Matte Black/ 20W/ 9 ports)

Model No. C-MCS-2409-BL-27U-60W
(Matte Black/ 60W/ 9 ports)

Model No. C-MCS-2409-PC-27U-20W
(Polished Chrome/ 20W/ 9 ports)



Model No. C-MCS-2409-PC-27U-60W
(Polished Chrome/ 60W/ 9 ports)

24" Square/ 25 Ports
Short Frosted Pendant
Matte Black



MULTI-PORT CANOPY

24" Square/ 25 Ports

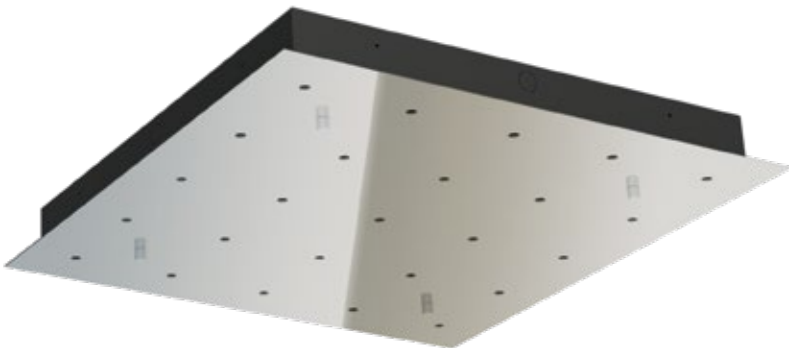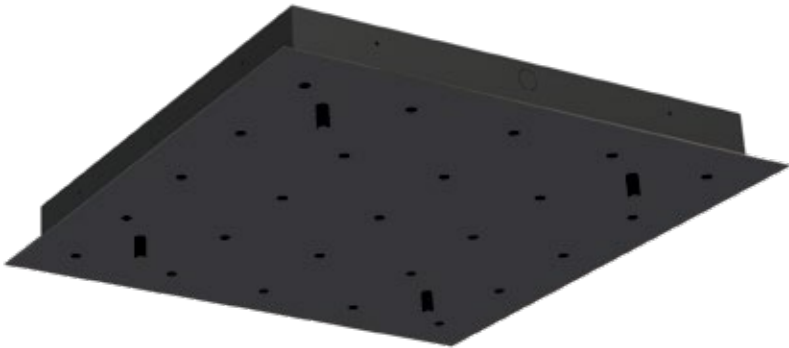

Features


- Standard black or polished chrome faceplate (with a black housing)
- Canopy comes without pendants (ordered separately)
- When ordered with pendants, canopy ships with pendants assembled and pre-installed on canopy
- Fabricated steel construction
- Driver located in canopy housing
- Damp location rated

Specifications

- Input Voltage: 100-277VAC 50/60Hz
- Dimming: TRIAC, ELV or 0-10V dimmable
- Watts: 40W driver is standard for 24" canopy

Custom

- Available with white front faceplate
- Available with higher wattage remote driver

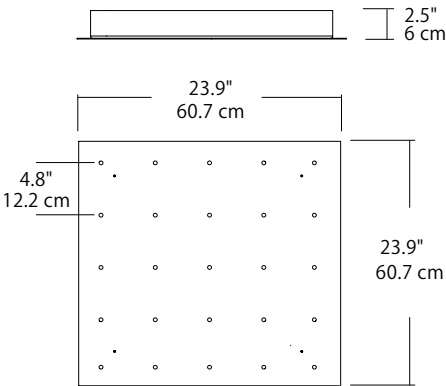

RECOMMENDED PENDANTS

Light Guide/Short Frosted P-LSF-01-XX-30K	Color Gel/Green P-CGG-03-XX-30K	3" Globe/Clear P-GSC-03-XX-30K
Light Guide/Filament P-LFL-01-XX-30K	3" Globe/Frosted P-GSF-03-XX-30K	Light Guide/Bubble P-LBU-03-XX-30K

Pendants to be ordered separately
(see pages 124-127 for full assortment)

Twenty Five Port

DRIVER COMPATIBLTY

Pendant Series	Watts	Driver
Light Guide Series	2W	40W
Color Gel Series	2W	40W
Artisan Ring Series	2W	40W
Velo Glass Series	2W	40W
Globe 3" Series	2W	40W
Globe 5" Series	5W	NR
Bullet 4" Series	2W	40W
Bullet 8" Series	5W	NR
Sphere 8" Series	2W	40W
Sphere 12" Series	5W	NR
Novo Tall Series	5W	NR
Novo Short Series	5W	NR
Pill Box 10" Series	5W	NR
Domos 16" Series	5W	NR

NR (Not Recommended)

24" MULTI-PORT SQUARE CANOPY/ 25 Port

Model No. C-MCS-2425-BL-27U-40W
(Matte Black/ 40W/ 25 ports)

Model No. C-MCS-2425-PC-27U-40W
(Polished Chrome/ 40W/ 25 ports)

38" Rectangle/ 10 Ports
3" Bubble Globe Pendant
Matte Black



MULTI-PORT CANOPY

38" Rectangle/ 10 Ports



Features


- Standard black or polished chrome faceplate (with a black housing)
- Canopy comes without pendants (ordered separately)
- When ordered with pendants, canopy ships with pendants assembled and pre-installed on canopy
- Fabricated steel construction
- Driver located in canopy housing
- Damp location rated

Specifications

- Input Voltage: 100-277VAC 50/60Hz
- Dimming: TRIAC, ELV or 0-10V dimmable
- Watts: 20W driver is standard for 38" canopy

Custom

- Available with white front faceplate
- Available with 60W or higher wattage custom driver

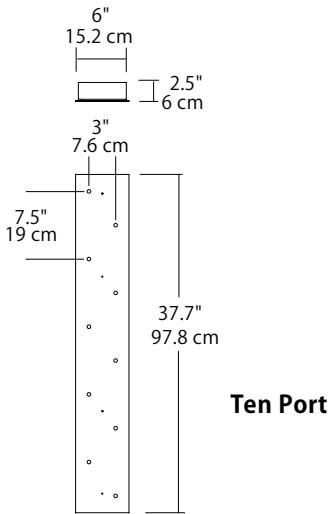

RECOMMENDED PENDANTS

		
4" Bullet/Black P-BSB-04-XX-30K	Color Gel/Blue P-CGB-03-XX-30K	Light Guide/Tall Clear P-LTC-01-XX-30K
		
Novo Tall/Bubble P-NTB-02-XX-30K	Novo Short/Reflector Ring P-NSR-02-XX-30K	3" Globe/Frosted P-GSF-03-XX-30K

Pendants to be ordered separately
(see pages 124-127 for full assortment)

DRIVER COMPATIBILITY

Pendant Series	Watts	Driver
Light Guide Series	2W	20W
Color Gel Series	2W	20W
Artisan Ring Series	2W	20W
Velo Glass Series	2W	20W
Globe 3" Series	2W	20W
Globe 5" Series	5W	60W
Bullet 4" Series	2W	20W
Bullet 8" Series	5W	60W
Sphere 8" Series	2W	20W
Sphere 12" Series	5W	NR
Novo Tall Series	5W	60W
Novo Short Series	5W	60W
Pill Box 10" Series	5W	NR
Domos 16" Series	5W	NR

NR (Not Recommended)

38" MULTI-PORT RECTANGLE CANOPY/ 10 Port

Model No. C-MCT-3810-BL-27U-20W

(Matte Black/ 20W/ 10 ports)

Model No. C-MCT-3810-BL-27U-60W

(Matte Black/ 60W/ 10 ports)

Model No. C-MCT-3810-PC-27U-20W

(Polished Chrome/ 20W/ 10 ports)

Model No. C-MCT-3810-PC-27U-60W

(Polished Chrome/ 60W/ 10 ports)

38" Rectangle/ 18 Ports
Gradient Pendant
Polished Chrome



MULTI-PORT CANOPY

38" Rectangle/ 18 Ports

Features


- Standard black or polished chrome faceplate (with a black housing)
- Canopy comes without pendants (ordered separately)
- When ordered with pendants, canopy ships with pendants assembled and pre-installed on canopy
- Fabricated steel construction
- Driver located in canopy housing
- Damp location rated

Specifications

- Input Voltage: 100-277VAC 50/60Hz
- Dimming: TRIAC, ELV or 0-10V dimmable
- Watts: 40W driver is standard for 38" canopy


Custom

- Available with white front faceplate
- Available with 96W or higher wattage driver

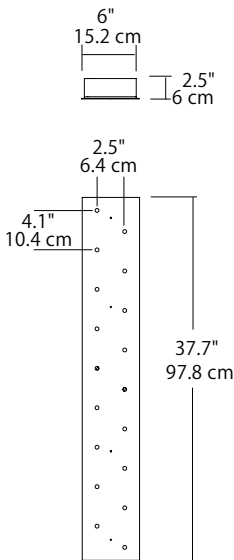

Eighteen Port

RECOMMENDED PENDANTS

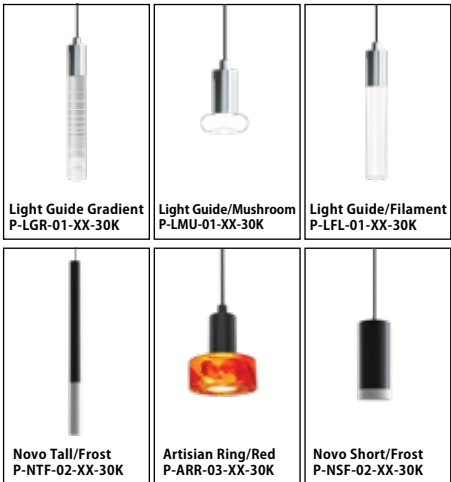

Pendants to be ordered separately
(see pages 124-127 for full assortment)

DRIVER COMPATIBILITY

Pendant Series	Watts	Driver
Light Guide Series	2W	40W
Color Gel Series	2W	40W
Artisan Ring Series	2W	40W
Velo Glass Series	2W	40W
Globe 3" Series	2W	40W
Globe 5" Series	5W	96W
Bullet 4" Series	2W	40W
Bullet 8" Series	5W	NR
Sphere 8" Series	2W	NR
Sphere 12" Series	5W	NR
Novo Tall Series	5W	96W
Novo Short Series	5W	96W
Pill Box 10" Series	5W	NR
Domos 16" Series	5W	NR

NR (Not Recommended)

38" MULTI-PORT RECTANGLE CANOPY/ 18 Port

Model No. C-MCT-3818-BL-27U-40W
(Matte Black/ 40W/ 18 ports)

Model No. C-MCT-3818-BL-27U-96W
(Matte Black/ 96W/ 18 ports)

Model No. C-MCT-3818-PC-27U-40W
(Polished Chrome/ 40W/ 18 ports)

Model No. C-MCT-3818-PC-27U-96W
(Polished Chrome/ 96W/ 18 ports)



22" Linear/ 5 Ports
3" Clear Globe Pendant
Matte Black



MULTI-PORT CANOPY

22" Linear/ 5 Ports

Features

- Standard Black or White housing
- Canopy comes without pendants (ordered separately)
- When ordered with pendants, canopy ships with pendants assembled and pre-installed on canopy
- Fabricated steel construction
- Driver located in canopy housing (or above canopy for rear mounted drivers version)
- Damp location rated

Specifications

- Input Voltage: 120VAC 50/60Hz
- Dimming: TRIAC or ELV dimmable
- Watts: 20W driver is standard for 22" canopy

Custom

- Available with 40W or higher wattage driver
- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)




RECOMMENDED PENDANTS



Pendants to be ordered separately
(see pages 124-127 for full assortment)

Five Port

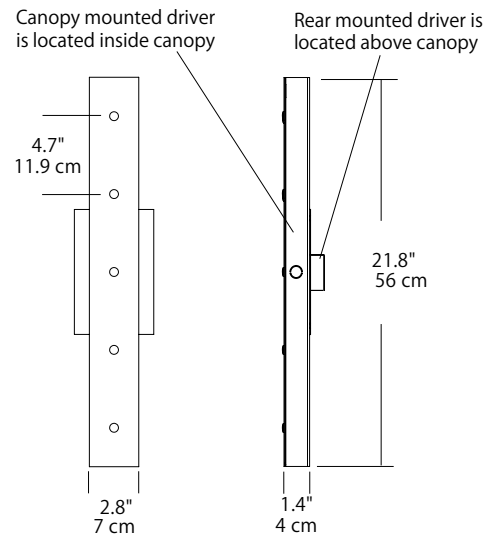

DRIVER COMPATIBILITY / 5 PORT

Pendant Series	Watts	Driver
Light Guide Series	2W	20W
Color Gel Series	2W	20W
Artisan Ring Series	2W	20W
Velo Glass Series	2W	20W
Globe 3" Series	2W	20W
Globe 5" Series	5W	NR
Bullet 4" Series	2W	20W
Bullet 8" Series	5W	NR
Sphere 8" Series	2W	NR
Sphere 12" Series	5W	NR
Novo Tall Series	5W	NR
Novo Short Series	5W	40W
Pill Box 10" Series	5W	40W
Domos 16" Series	5W	NR

NR (Not Recommended)

22" MULTI-PORT LINEAR CANOPY/ 5 or 3 Port

Model No. C-MCL-2205-BL-12T-20W-RM

(Matte Black/ 20W/ 5 ports/ Rear mount driver)

Model No. C-MCL-2203-BL-12T-20W-CM

(Matte Black/ 20W/ 3 ports/ Canopy mount driver)

Model No. C-MCL-2205-WH-12T-20W-RM

(White/ 20W/ 5 ports/ Rear mount driver)

Model No. C-MCL-2203-WH-12T-20W-CM

(White/ 20W/ 3 ports/ Canopy mount driver)

48" Linear/ 11 Ports
Short Frosted Pendant
Matte Black



48" Linear/ 3 Ports
12" Clear Glass Sphere Pendant
White



MULTI-PORT CANOPY

48" Linear/ 11 Ports

Features


- Standard Black or White housing
- Canopy comes without pendants (ordered separately)
- When ordered with pendants, canopy ships with pendants assembled and pre-installed on canopy
- Fabricated steel construction
- Driver located in canopy housing (or above canopy for rear mounted drivers version)
- Damp location rated

Specifications

- Input Voltage: 120VAC 50/60Hz
- Dimming: TRIAC or ELV dimmable
- Watts: 20W driver is standard for 48" canopy

Custom

- Available with 60W or higher wattage driver
- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)

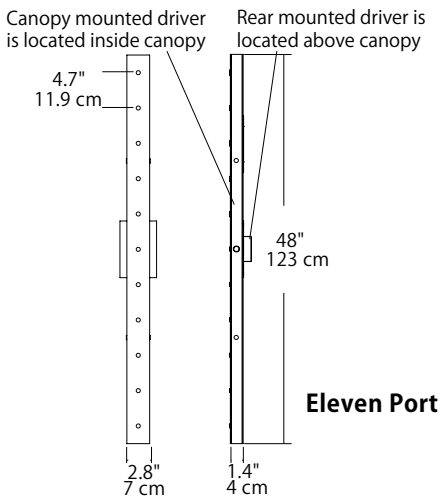

RECOMMENDED PENDANTS



Pendants to be ordered separately
(see pages 124-127 for full assortment)

DRIVER COMPATIBILITY / 11 PORT

Pendant Series	Watts	Driver
Light Guide Series	2W	20W
Color Gel Series	2W	20W
Artisan Ring Series	2W	20W
Velo Glass Series	2W	NR
Globe 3" Series	2W	20W
Globe 5" Series	5W	NR
Bullet 4" Series	2W	20W
Bullet 8" Series	5W	NR
Sphere 8" Series	2W	NR
Sphere 12" Series	5W	NR
Novo Tall Series	5W	60W
Novo Short Series	5W	60W
Pill Box 10" Series	5W	NR
Domos 16" Series	5W	NR

NR (Not Recommended)

48" MULTI-PORT LINEAR CANOPY/ 11, 6, 3 Port

Model No. C-MCL-4811-BL-12T-20W-RM

(Matte Black/ 20W/ 11 ports/ Rear mount driver)

Model No. C-MCL-4806-BL-12T-20W-CM

(Matte Black/ 20W/ 6 ports/ Canopy mount driver)

Model No. C-MCL-4803-BL-12T-20W-CM

(Matte Black/ 20W/ 3 ports/ Canopy mount driver)

Model No. C-MCL-4811-WH-12T-20W-RM

(White/ 20W/ 11 ports/ Rear mount driver)

Model No. C-MCL-4806-WH-12T-20W-CM

(White/ 20W/ 6 ports/ Canopy mount driver)

Model No. C-MCL-4803-WH-12T-20W-CM

(White/ 20W/ 3 ports/ Canopy mount driver)

Quatro Modular System / Custom
Short Frosted Pendant
Matte Black / Random





MODULAR SYSTEMS



Quatro Modular System/ Custom
Novo tall pendants
Polished chrome

QUATRO MODULAR SYSTEM

Base Module: 24" x 24" Square Canopy



Quatro System/ Square
pg. 152



Quatro System/ Linear
pg. 154



Quatro System/ Custom
pg. 156

DUO MODULAR SYSTEM

Base Module: 38" x 6" Rectangular Canopy




Duo System/ Linear
pg. 160

SOLO MODULAR SYSTEM

Base Module: 48" x 3" or 22" x 3" Linear Canopy



Solo System/ Linear
pg. 160



Solo System/ Grid
pg. 160



Solo System/ Grid
pg. 158

MODULAR SYSTEMS

OVERVIEW

Blackjack Lighting's variety of connecting modular systems allow you to create innovative decorative lighting fixtures of any size or scale.

The **Quatro Modular System** is based on a 24" x 24" square that links with additional square modules to create large rectangular or square canopy configurations. Fill the space below with innovative, scalable, 3-dimensional sculptured illumination.

Long and Lean, the **Duo Modular System** is designed to accentuate both horizontal scale and vertical density. Primarily 2-dimensional but scalable in a variety of ways.


Versatility is at the heart of the **Solo Modular System**. Create a simple line of large pendants over a bar, construct a grid canopy above and between challenging ceiling conditions, or create your own canopy structure with pendants to highlight the architecture and design of the space below. Complete with "X", "T" and "L" connectors, options are limitless to create sculptured, illuminated 3-dimensional forms, or even floating "ceilings of light".



Quatro Modular System/ Square 8S
Short Frosted Pendant
Matte Black, Stepped

25 Port Canopy

2425

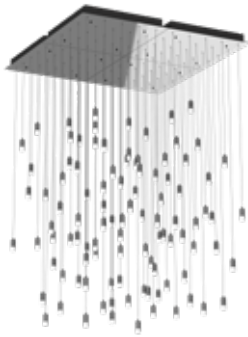

Random (RA)
4S-4' Square

9 Port Canopy

2409



Random (RA)
4S-4' Square

QUATRO SYSTEM

Square Configuration

Comprised of four, nine or sixteen multi-port 24" square modules, our pre-configured Quatro System in Polished Chrome or Matte Black is sold complete with all necessary hardware and your choice of Multi-port Pendant.

The Quatro System makes it easy to create custom looks. Select a pattern below, or come up with your own design. Field adjustments are fast and easy; grippers eliminate the need for cutting and splicing. Cables can be adjusted and re-adjusted as needed.


See pages 124-127 for additional pendant options, and pages 170-171 for additional mounting and control options.

Ordering Options

Fixtures ship pre-configured (as shown). Submittal sign-off may be required.


For DY (Do it yourself) option fixtures ship with 12' cables (8' exposed from fixture).

Base Canopy Module

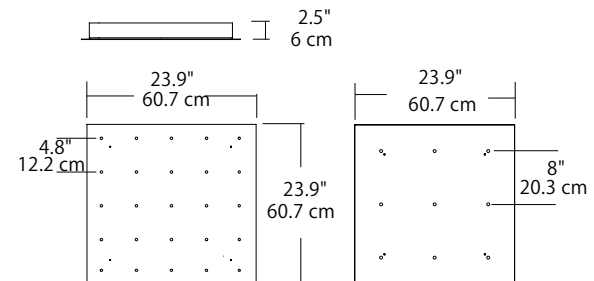


Twenty Five Port


Nine Port

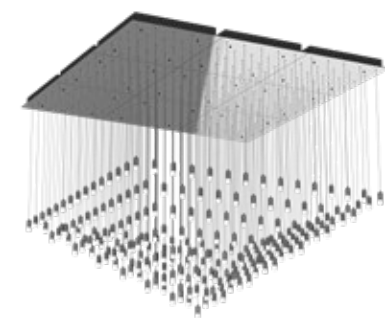


Pyramid (PY)
6S-6' Square

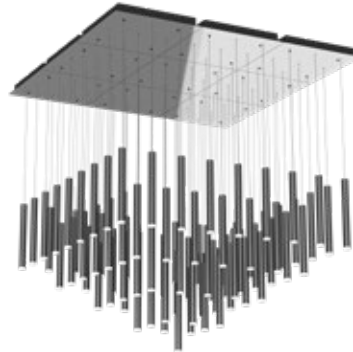

Pyramid (PY)
6S-6' Square

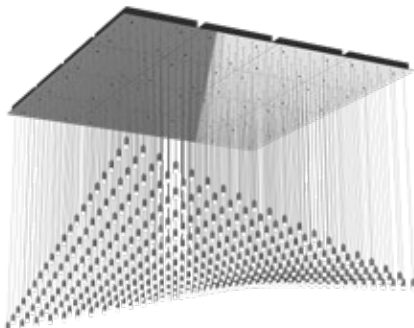

Wave (WV)
8S-8' Square

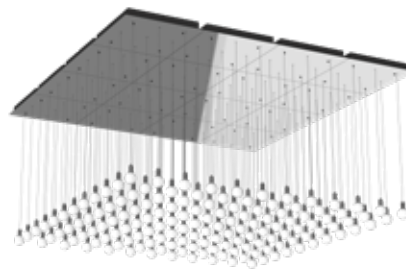

Level (LV)
8S-8' Square

Ordering Guide

Example: MSQ-2425-BL-LSF-4S-RA-30K

System	Canopy	Finish	Pendant	Layout	Pattern	Color Temp.
MSQ	-	-	-	-	-	-

2425 24"/25 ports	PC Polished Chrome	LSF Short Frosted	4S 2x2 Grid	RA Random	30K 3000K
2409 24"/9 ports	BL Matte Black	LTC Tall Clear	6S 3x3 Grid	LV Level	40K 4000K
		SSC 8" Sphere	8S 4x4 Grid	SP Stepped	
		GSF 3" Frosted Globe		PY Pyramid	
		NTL Novo Tall		WV Wave	
				DY Do it yourself	

4S- 4' Square (2x2, 4 modules)

Fixture Wattage: 148 Watts
Fixture Output: 8,200 Lumens

6S- 6' Square (3x3, 9 modules)

Fixture Wattage: 333 Watts
Fixture Output: 18,450 Lumens

8S- 8' Square (4x4, 16 modules)

Fixture Wattage: 592 Watts
Fixture Output: 32,800 Lumens



CUTTING
SPLICING
NOT
REQUIRED



Quatro Modular System/ Linear 6L
Short Frosted Pendants
Matte Black, Staggered

25 Port Canopy 2425




Stepped (SP)
4L-4'x2' Linear


9 Port Canopy 2409




Level (LV)
4L-4'x2' Linear

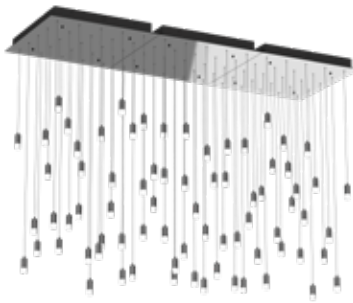


Random (RA)
6L-6'x2' Linear

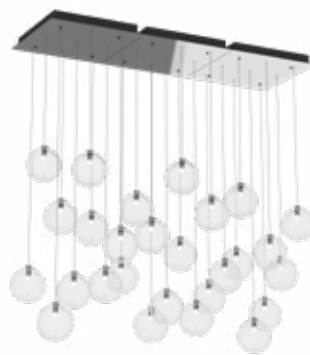

Random (RA)
6L-6'x2' Linear

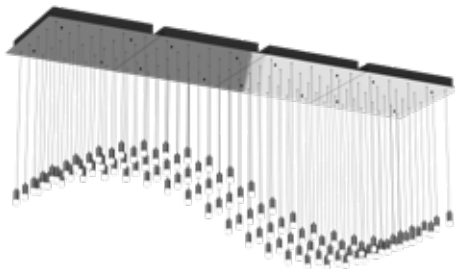

Wave (WV)
8L-8'x2' Linear

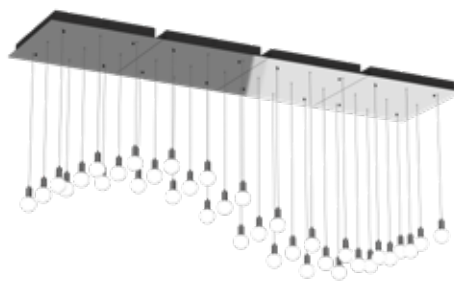

Wave (WV)
8L-8'x2' Linear

Ordering Guide

Example: MSQ-2425-BL-LSF-4L-RA-30K

System	Canopy	Finish	Pendant	Layout	Pattern	Color Temp.
MSQ	-	-	-	-	-	-

2425 24"/25 ports	PC Polished Chrome	LSF Short Frosted	4L 1x2 Grid	RA Random	30K 3000K
2409 24"/9 ports	BL Matte Black	LTC Tall Clear	6L 1x3 Grid	LV Level	40K 4000K
		SSC 8" Sphere	8L 1x4 Grid	SP Stepped	
		GSF 3" Frosted Globe		PY Pyramid	
		VSF Velo/Filament		WA Wave	
				ST Staggered	
				DY Do it yourself	

QUATRO SYSTEM Linear Configuration

Comprised of two, three or four multi-port 24" square modules, our pre-configured Quatro System in Polished Chrome or Matte Black is sold complete with all necessary hardware and your choice of Multi-port Pendant.

The Quatro System makes it easy to create custom looks. Select a pattern below, or come up with your own design. Field adjustments are fast and easy; grippers eliminate the need for cutting and splicing. Cables can be adjusted and re-adjusted as needed.


See pages 124-127 for additional pendant options, and pages 170-171 for additional mounting and control options.

Ordering Options

Fixtures ship pre-configured (as shown). Submittal sign-off may be required.

For DY (Do it yourself) option fixtures ship with 12' cables (8' exposed from fixture).

Base Canopy Module

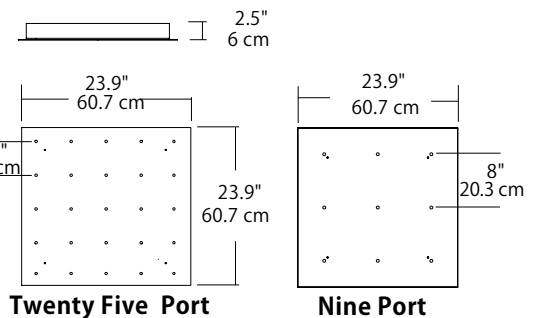

4L- 4' Linear (1x2, 2 modules)

Fixture Wattage: 74 Watts
Fixture Output: 4,100 Lumens

6L- 6' Linear (1x3, 3 modules)

Fixture Wattage: 111 Watts
Fixture Output: 6,150 Lumens

8L- 8' Linear (1x4, 4 modules)

Fixture Wattage: 148 Watts
Fixture Output: 8,200 Lumens




CUTTING
SPLICING
**NOT
REQUIRED**




Quatro Modular System / Custom 6S
Novo Tall pendant
Polished Chrome


Custom Design Ideas

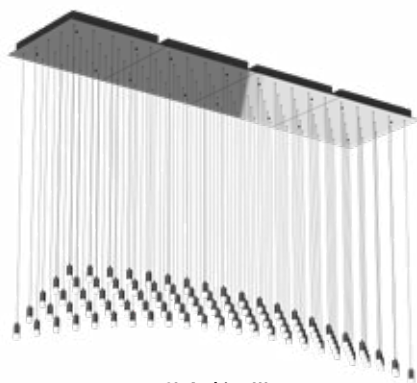


8L-Archiving Wave



6S-Double Curve

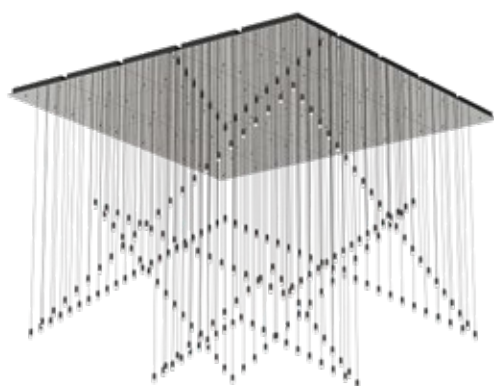


10S-Angles

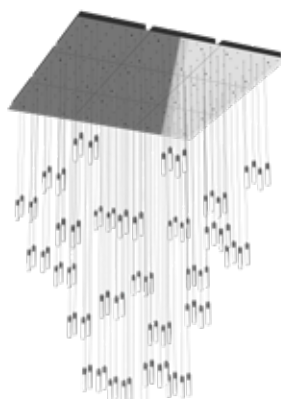

6S-Stepped



6S-Spiral

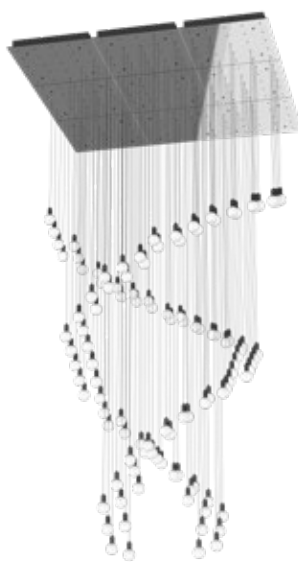

6S-Double Helix

QUATRO SYSTEM Custom Configuration

Use our Quatro system to create a custom fixture that's all your own. Our 24"x24" canopies join in a wide variety of shapes, sizes, port patterns and finishes.


Construct the exact shape and pattern desired to make a signature look by incorporating size, color, and style.

See pages 124-127 for additional pendant options, and pages 170-171 for additional mounting and control options.

Ordering Options

Contact Blackjack Lighting for design recommendations and assistance.

Base Canopy Module

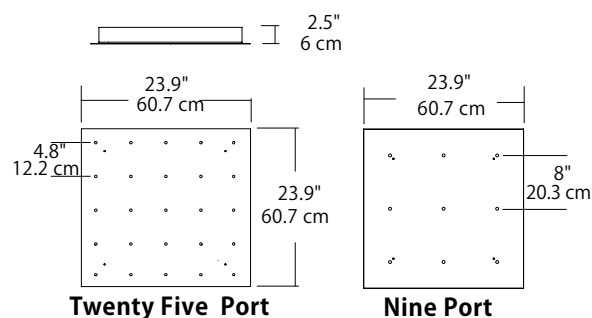


Custom port patterns available.




Duo Modular System/ Linear 9L
Frosted Globe pendant
Matte Black, Random

18 Port Canopy
3818

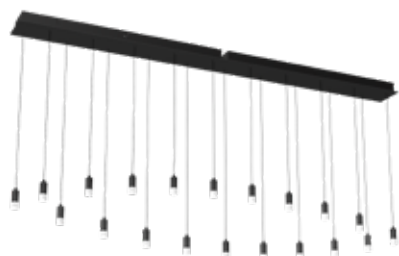

Pinched (PN)
6L-6'4"x6" Linear

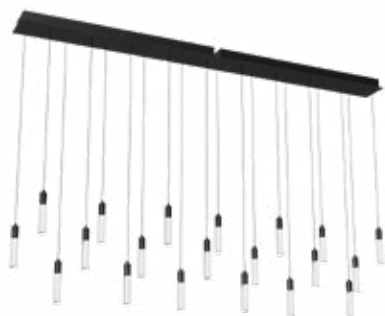

Stepped (SP)
6L-6'4"x6" Linear



Random (RA)
6L-6'4"x6" Linear

10 Port Canopy
3810



Curved (CV)
6L-6'4"x6" Linear



Level (LV)
6L-6'4"x6" Linear



Random (RA)
6L-6'4"x6" Linear

DUO SYSTEM

Linear Configuration

Comprised of two, three or four multi-port 38" rectangular modules, our pre-configured Duo System in Polished Chrome or Matte Black is sold complete with all necessary hardware and your choice of Multi-port Pendants.

The Duo system makes it easy to create custom looks. Select a pattern below, or come up with your own design. Field adjustments are fast and easy. Grippers eliminate the need for cutting and splicing. Cables can be adjusted and re-adjusted as needed.

See pages 124-127 for additional pendant options, and pages 170-171 for additional mounting and control options.


Ordering Options

Fixtures ship pre-configured (as shown). Submittal sign-off may be required.

For DY (Do it yourself) option fixtures ship with 12' cables (8' exposed from fixture)

Contact Blackjack Lighting for design recommendations and assistance, or to create a custom configuration.

Base Canopy Module

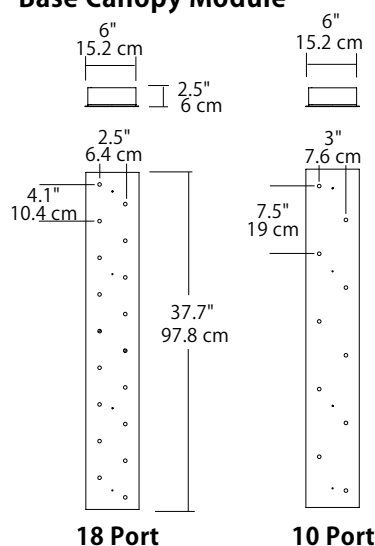

18 Port

10 Port

6L- 6' Linear System (1x2, 2 modules)

Fixture Wattage: 61 Watts
Fixture Output: 3,896 Lumens

9L- 9' Linear System (1x3, 3 modules)

Fixture Wattage: 93 Watts
Fixture Output: 5,844 Lumens

12L- 12' Linear System (1x4, 4 modules)

Fixture Wattage: 122 Watts
Fixture Output: 7,792 Lumens

Ordering Guide

Example: MSD-3818-BL-LSF-6L-RA-30K

System	Canopy	Finish	Pendant	Layout	Pattern	Color Temp.
--------	--------	--------	---------	--------	---------	-------------

MSD	-	-	-	-	-	-
-----	---	---	---	---	---	---

3810 38"/10 ports **PC** Polished Chrome
3818 38"/18 ports **BL** Matte Black

LSF Short Frosted
LTC Tall Clear
SSC 8" Sphere
GSF 3" Frosted Globe
NTL Novo Tall

6L 1x2 Grid
9L 1x3 Grid
12L 1x4 Grid

RA Random
LV Level
SP Stepped
PY Pyramid
CV Curved
PN Pinched
DY Do it yourself

30K 3000K
40K 4000K






Solo Modular System/ Linear
Short Frosted pendants
Matte Black



Step 1: Select your canopies

Pendants may be suspended from two different sized linear ceiling canopies. Select from an 48"/ 11-port canopy, a 22"/5-port canopy or a spacer canopy (no ports). Use as many ports as you need (color matching rubber plugs fill the ports that you don't use).

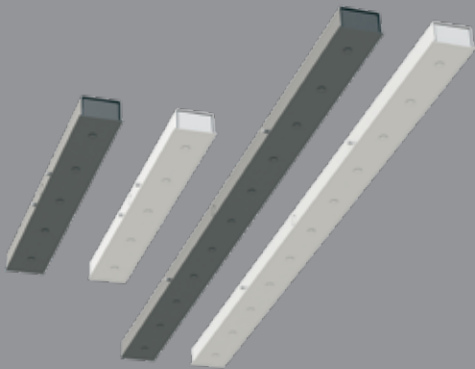

48" Canopy / 11 Port



Model No. C-MCL-4811-BL
(Matte Black/ 11 ports)
Model No. C-MCL-4811-WH
(Matte White/ 11 ports)

48" Canopy / Spacer



Model No. C-MCL-4800-BL
(Matte Black/ 0 ports)
Model No. C-MCL-4800-WH
(Matte White/ 0 ports)

22" Canopy / 5 Port



Model No. C-MCL-2205-BL
(Matte Black/ 5 ports)
Model No. C-MCL-2205-WH
(Matte White/ 5 ports)

22" Canopy / Spacer




Model No. C-MCL-2200-BL
(Matte Black/ 0 ports)
Model No. C-MCL-2200-WH
(Matte White/ 0 ports)

Step 2: Select your joiner


Solo linear joiners can be connected straight or at an angle by incorporating canopy joiners (as below). Joiners are available with and without pendant ports.

Angled joiners

L-Joiner




95053-BL
"L" joiner for Solo
- Black
95053-WH
"L" joiner for Solo
- White




95053-BL-P
"L" joiner for Solo with
mounting port - Black
95053-WH-P
"L" joiner for Solo with
mounting port - White

T-Joiner




95052-BL
"T" joiner for Solo
- Black
95052-WH
"T" joiner for Solo
- White




95052-BL-P
"T" joiner for Solo with
mounting port - Black
95052-WH-P
"T" joiner for Solo with
mounting port - White

X-Joiner




95051-BL
"X" joiner for Solo
- Black
95051-WH
"X" joiner for Solo
- White




95051-BL-P
"X" joiner for Solo with
mounting port - Black
95051-WH-P
"X" joiner for Solo with
mounting port - White

Linear joiners

Internal-Joiner




95054-BL
Internal joiner for
Solo - Black
95054-WH
Internal joiner for
Solo - White




95054-BL-P
Internal joiner for Solo -
Black
95054-WH-P
Internal joiner for Solo -
White

External-Joiner




95055-BL
External joiner for
Solo - Black
95055-WH
External joiner for
Solo - White




95055-BL-P
External joiner for Solo with
mounting port - Black
95055-WH-P
External joiner for Solo with
mounting port - White

End-Joiner



95056-BL
End joiner for Solo
- Black
95056-WH
End joiner for Solo
- White



95056-BL-P
End joiner for Solo with
mounting port - Black
95056-WH-P
End joiner for Solo with
mounting port - White



Step 3: Select your pendant

Assorted styles and sizes of pendants shown below. For details and more options see pages 124-127. 2W (90 Lumen) and 5W (400 Lumen) pendant options available.

Recommended 2W pendants



P-SSF-08-BL-30K
P-SSF-08-WH-30K



P-GSB-03-BL-30K
P-GSB-03-WH-30K



P-LSF-01-BL-30K
P-LSF-01-WH-30K



P-VCF-05-BL-30K
P-VCF-05-WH-30K

Recommended 5W pendants



P-SLC-12-BL-30K
P-SLC-12-WH-30K



P-DOM-16-BG-30K
P-DOM-16-WG-30K



P-PBX-10-BG-30K
P-PBX-10-WH-30K



P-BLB-08-BL-30K
P-BLW-08-WH-30K

For all pendant options see pages 124-127

Step 4: Select your power supply

Driver Guide

2W pendants

Total Pendants	Req'd Driver
1 to 26	40W
27 to 64	96W
65 to 213	320W

5W pendants

Total Pendants	Req'd Driver
1 to 6	40W
7 to 16	96W
17 to 53	320W

In line power supplies



End Feed 300W Driver
Model No. 95058-300-WH
Model No. 95058-300-BL



End Feed 96W Driver
Model No. 95058-96-WH
Model No. 95058-96-BL



End Feed 40W Driver
Model No. 95057-40-WH
Model No. 95057-40-BL

Remote power supply



Remote Mount 300W Driver
Model No. 94020-RM

Grid spacer



Spacer (no driver)
Model No. 95057-WH
Model No. 95057-BL


SOLO SYSTEM ORDERING GUIDE

The highly flexible **Solo System** can create a wide variety of fixture shapes in 2D and 3D.

Design the configuration, then create your custom fixture by choosing the parts for your application. Select pre-configured linear canopies, connectors and power supplies. Select multi port pendants from pages 124-127.

Contact Blackjack Lighting for design recommendations and assistance.

Ordering Example

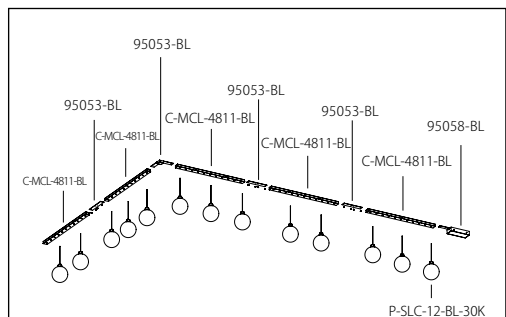

BILL OF MATERIALS:

QTY.	MODEL NO.	DESCRIPTION
5	C-MCL-4811-BL	48" 11 Port Canopy Black
1	95053-BL	L-Joiner (no mounting port) - Black
3	95054-BL	internal Joiner
13	P-SLC-12-BL-30K	12" Glass Sphere Pendant - Black
1	95058-300-BL	300W driver end feed - Black



Solo Modular System/ Linear
Bullet Small Pendants
Matte Black



SOLO SYSTEM

Linear Configuration


Comprised of two, three or four or more Linear Modules, our pre-configured components in White and Matte Black can be built to your specifications, with all necessary hardware and your choice of Multi-Port pendants.

Use the Solo System to create a wide variety of fixture shapes in 2D and 3D.

Design the configuration, then create your custom fixture by choosing the parts for your application. See pages 162-163 for the Solo System ordering guide.

Contact Blackjack Lighting for design recommendations and assistance.

Design Ideas

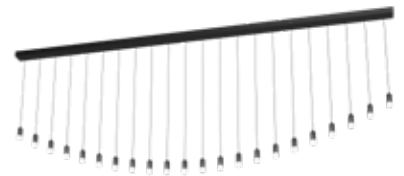



Solo Modular System/ Grid
Frosted Globe Pendants
Polished Chrome






SOLO SYSTEM

Grid Configuration

Comprised of two, three or four or more Linear Modules with connector options, our pre-configured components in White and Matte Black can be built to your specifications, with all necessary hardware and your choice of Multi-Port pendants. See pages 162-163 for the Solo System ordering guide.

Design Ideas

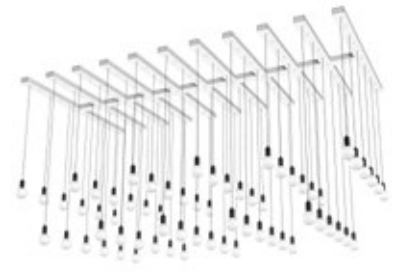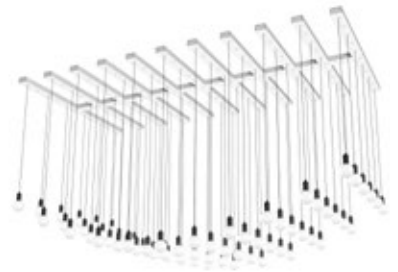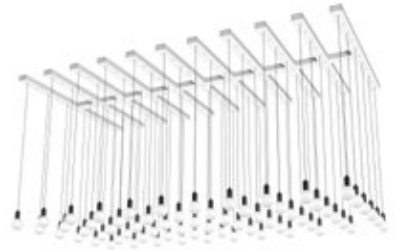



Solo Modular System/ Grid
Domos 16" pendant
Matte Black



SOLO SYSTEM

Grid Configuration

Comprised of two, three or four or more Linear Modules with mating corner options, our pre-configured components in White and Matte Black can be built to your specifications, with all necessary hardware and your choice of Multi-Port pendants. See pages 162-163 for the Solo System ordering guide.

Design Ideas

22" Grid



48" Grid





SWAG HOOK

Features

- Small, low profile clamp to hold pendant cables from different locations on the ceiling
- Can be used with any Multi-Port canopy
- Available in Black or Polished Chrome
- Comes with wood screw for mounting into wood support material, but can be mounted into sheet rock ceilings with expansion anchors (not included)
- Allows easy attachment of the pendant cable and can be re-adjusted as needed





CEILING MOUNTED SWAG HOOK

Model No: 92043-PC

(Polished Chrome)

Model No: 92043-BL


(Matte Black)

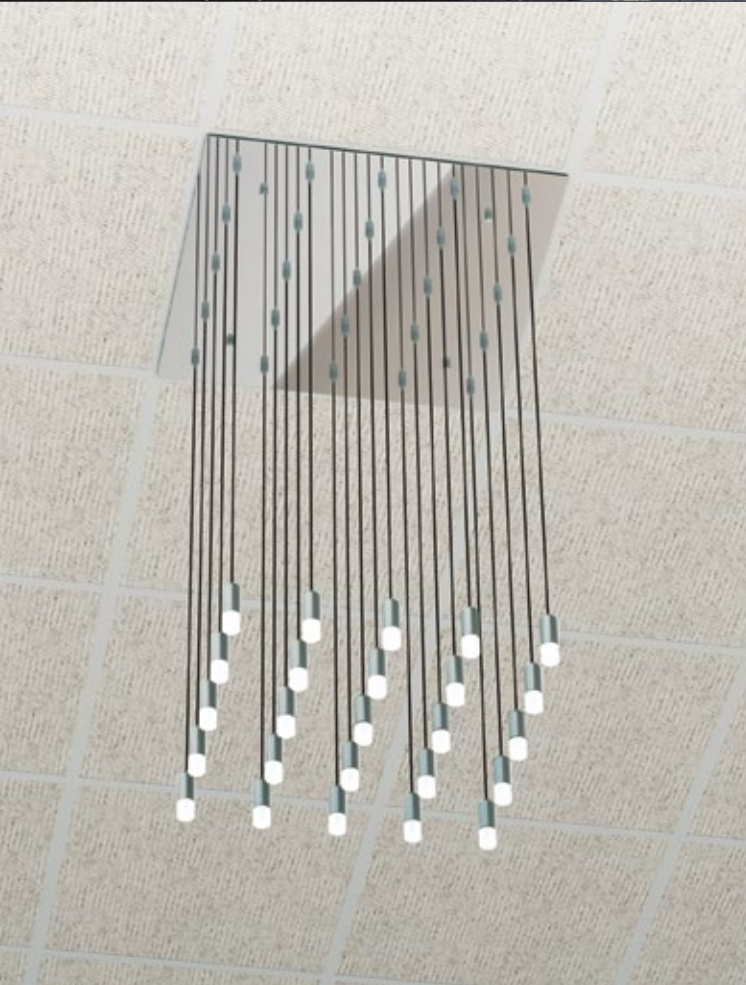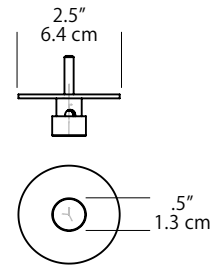

T-BAR MOUNTING KIT

Features

- Used to install a 24" Multi-Port canopy, Seraph or Steelos fixtures into a 2' x 2' suspended T-bar ceiling system.
- Creates a flush mounted fixture (faceplate will sit in front of exposed T-Bar supports)
- Comes with four flanges that attach directly to 24" x 24" canopy back plate
- Adjustable mounting height to accommodate different ceiling tile thicknesses
- Each 24" fixture requires one mounting kit.
- Mounting kit fits behind T-Bar supports and will not be seen from below

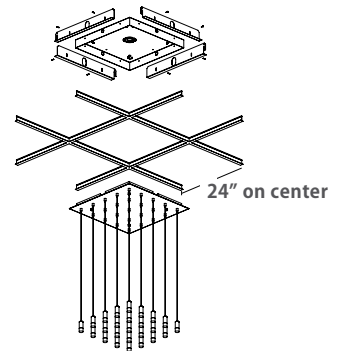

T-BAR MOUNTING KIT

Model No: 92072

(Black)

MOUNTING AND CONTROL OPTIONS

2.5" FASCIA MOUNTING PLATE

Features

- Small, low profile canopy
- May be used with any multi-port pendant (see pages 124-127)
- Designed for use in multiples with remote mounted driver
- Available in Black or White
- Mounts to ceiling with two screws (not included)
- Does not include 12' cable assembly or pendants (must be ordered separately)


2.5" FASCIA CANOPY

Model No: 92087-WH

(Matte White)

Model No: 92087-BL

(Matte Black)




DMX CONTROL OPTIONS


Features

- DMX controller can be added as a custom option to many of the Multi-Port canopies.
- Creates motion and artistic lighting effects that can scroll across large fields of pendants
- Can use pre-programmed effects or use other live DMX input


Standard DMX Patterns available

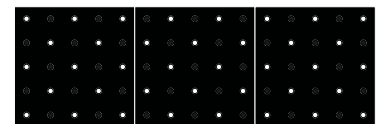

Geometric

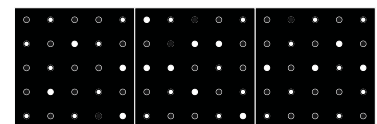

Random

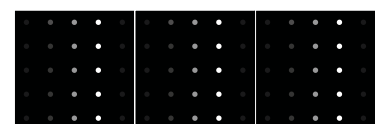

Wave

Ordering Information

- Consult Blackjack Lighting for more information



24" Square/ 25 Ports
Mushroom Pendant
Matte Black

NOTES



36" Dot Pendant
Etched Gold





CUSTOMIZATION

Many of the designs in our 2019 Professional Catalog are available with technical and decorative options. Information about specific options appears on relevant product pages. Contact our Customer Service staff for information on modifications not listed in this catalog.

Email: cs@blackjacklighting.com.

OTHER

DISCLAIMER

Blackjack Lighting is constantly developing and improving its products. For this reason, all product descriptions in this catalog are intended as a general guide, and we may change specifications time to time in the interest of product development, without prior notification or public announcement. All descriptions in this publication present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide have been obtained in controlled experimental conditions. However, Blackjack Lighting cannot accept any liability arising from the reliance on such data to the extent permitted by law.

FINISHES

Due to variations in printing, finish colors reproduced in the catalog may differ from those of the final products.

WARRANTY

As detailed in our full warranty statement, Blackjack Lighting, provides a limited, non-assignable one (1) year warranty from date of purchase to the original purchaser only of all the Blackjack products from defects in material and workmanship. Blackjack provides an additional limited three (3) year non-assignable warranty from date of purchase to the original purchaser only of all Blackjack integrated or replaceable LED light sources and LED power supplies that are included at the time of purchase. These LED components will be covered against failure to operate, provided the piece is proven to be defective. See website for complete warranty and return information: blackjacklighting.com.

CREDITS

©2019 Blackjack Lighting. Catalog may not be reproduced in whole or in part without permission.



BLACKJACK[®]
L I G H T I N G

BLACKJACKLIGHTING.COM

CORPORATE

1547 BARCLAY BLVD.
BUFFALO GROVE, IL 60089
PHONE: (847) 941-0588
FAX: (847) 306-3432

SHOWROOM

DALLAS MARKET CENTER
TRADE MART 4432-12
2100 STEMMONS FREEWAY
DALLAS, TX 75207