

**Project:**

**Note:**

**Type:**

**Quantity:**

**Model#:**

SP - GLL - CL - 05 - \_\_\_ - \_\_\_ - 5W - \_\_\_ - \_\_\_

**Description**

The Clear Globe pendant is a simple spherical form. Executed in optical acrylic, this pendant uses an integrated LED light source and has even distribution in all directions.

**Specifications**

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K (standard)
- Cable Length: 8' (see page 2 for detail), for longer lengths consult factory
- Lumens: 5W/ 400Lumens
- Lamping: 5W
- For recommended dimmers see <https://www.blackjacklighting.com/dimming-information>


**Features**

- Screw-in optical acrylic light guide
- Suspends from an 8' adjustable cable
- Damp location rated

**Options**

- Color Temperature: 2700K, 3000K, 3500K, 4000K
- Standard Socket Finishes: BL - Matte Black, PC - Polished Chrome or WH - White
- Special Order Powder Coat Socket Finishes: BZ - Bronze, SG - Satin Gold or SS - Satin Silver
- Mounting: See page 2 for mounting options

**Dimensions**

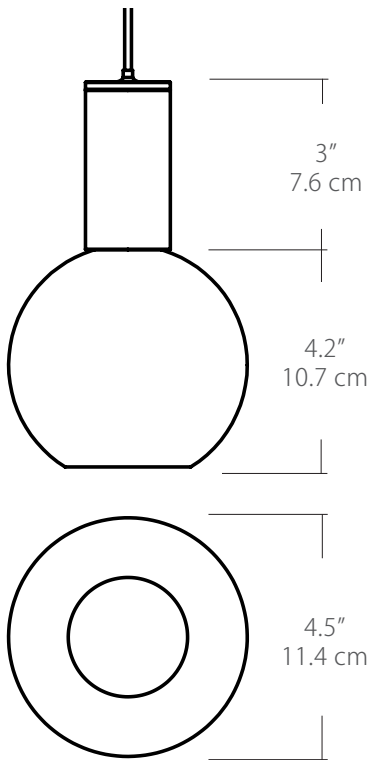

**Diffuser**



**ORDERING GUIDE**


| Category         | Series                  | Diffuser  | Size           | Finish   | Color Temp.                                      | Wattage          | Mounting  | Length   |
|------------------|-------------------------|-----------|----------------|--|--|------------------|---|--|
| <b>SP</b>        | <b>GLL</b>              | <b>CL</b> | <b>05</b>      |  | <b>30K</b>                                       | <b>5W</b>        |   |  |
| SP Small Pendant | GLL Large Globe Pendant | CL Clear  | 05 5" Diameter | <b>Standard</b><br>BL Black<br>PC Polished Chrome<br>WH White<br><b>Special Order</b><br>BZ Bronze<br>SG Satin Gold<br>SS Satin Silver | 27K 2700K<br>30K 3000K<br>35K 3500K<br>40K 4000K | 5W 5Watts/ 400Lm | SP5 5" Canopy<br>SP2 2.5" Fascia Canopy<br>MPC Multi-Port Connector<br>JTA JackTrack Adapter<br>(See page 2 for mounting information) | BLANK (Leave blank for standard 96" cable length)<br>### for cable length longer than 96" specify cable length in inches |

**Example:** SP-GLL-CL-05-BL-30K-5W-SP2- (30K Standard)


**Finish**





|   |  |  |  |   |   |   |
|---|--|--|--|---|---|---|
| <p><b>Finish</b></p>  <p>PC<br/>BL<br/>WH<br/>BZ<br/>SG<br/>SS</p> |  <p><b>PC</b> - Polished Chrome</p> |  <p><b>BL</b> - Matte Black</p> |  <p><b>WH</b> - White</p> |  <p><b>BZ</b> - Bronze</p> |  <p><b>SG</b> - Satin Gold</p> |  <p><b>SS</b> - Satin Silver</p> |
| <p><b>Standard Finishes</b></p>   |  |  | <p><b>Special Order Powder Coat Finishes</b></p>   |   |   |   |

**Wattage**


|   |   |
|---|---|
| <p><b>Wattage</b></p>  <p>5W</p> | <p><b>5W</b> = 5 Watts / 400 Lumens</p> <p>(Lumens measured at 3000K)</p> |
|---|---|

**Mounting**

|   |   |
|---|---|
| <p><b>Mounting</b></p>  <p>SP5<br/>SP2<br/>MPC<br/>JTA</p> | <p><b>SP5</b> = 5" canopy with integrated driver (included), attaches to rear of canopy and sits inside ceiling mounted junction box<br/><i>Cable with modular connector attaches to canopy w/ integrated universal driver (120-277V / TRIAC, ELV, 0-10V dimming)</i></p> <p><b>SP2</b> = 2.5" thin profile canopy that attaches flush to a rigid ceiling (driver sold separately)<br/><i>Cable with modular connector (and optional wire harness) attaches to a remote driver</i></p> <p><b>MPC</b> = Multi-port connector attaches to any of BlackJack's Multi-Port canopies (canopy and driver sold separately)<br/><i>Cable with modular connector attaches to a driver inside a Multi-Port canopy (driver may be remote)</i></p> <p><b>JTA</b> = Adapter connects the pendant in any position along the JackTrack system (track and driver sold separately)<br/><i>Cable is cut to length and inserted in a connector at the bottom of the JackTrack adapter</i></p> |
|---|---|

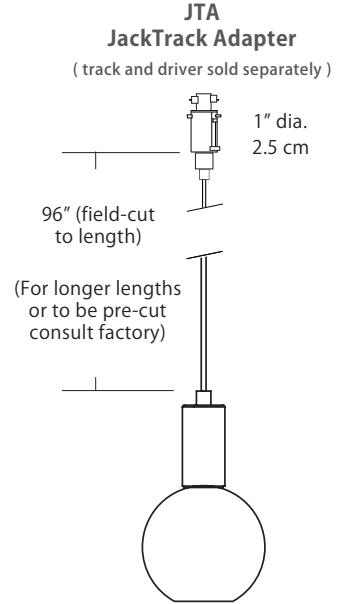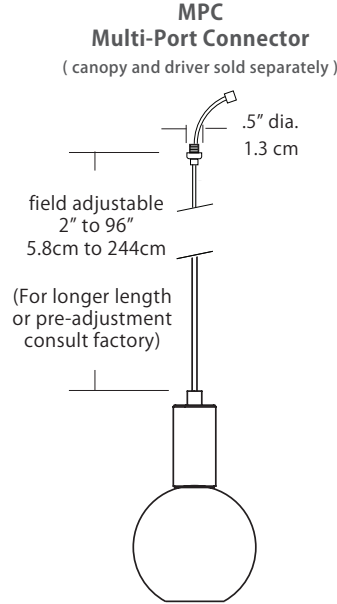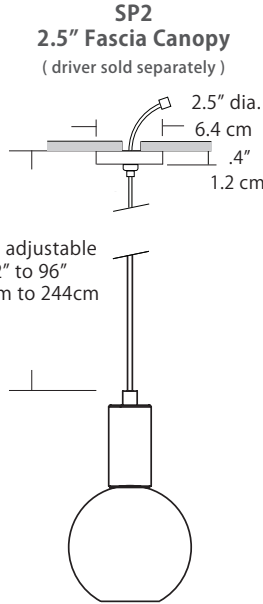
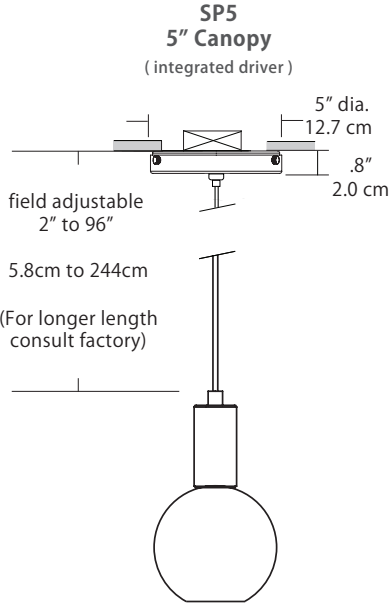
















**Max Cable Length**

|   |   |
|---|---|
| <p><b>Length</b></p>  <p>BLANK<br/>###</p> | <p><b>BLANK</b> = Leave blank for standard 96" cable length.</p> <p><b>###</b> = Specify maximum cable length needed for fixture (in inches).</p> <p>Factory pre-configuration of cable length is available. Consult factory for details.</p> |
|---|---|

For full specifications and ordering information see [blackjacklighting.com](http://blackjacklighting.com)

(# symbol indicates additional specification required)
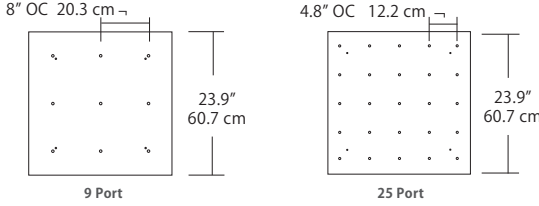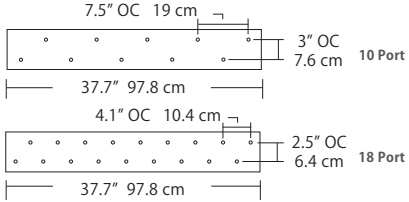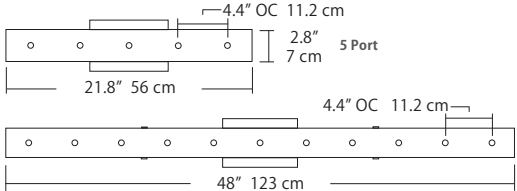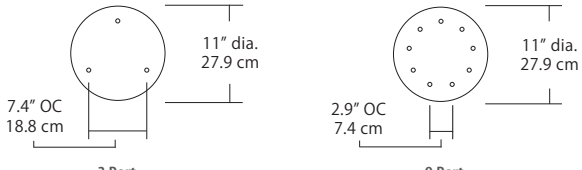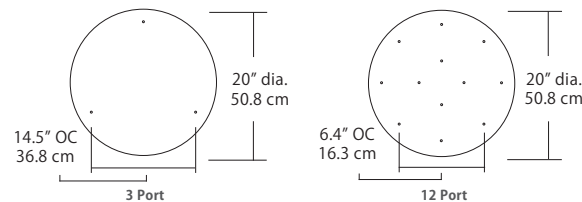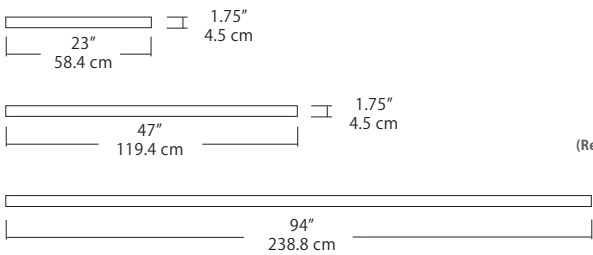
| Pendant Mounting | Canopy   | Dimensions   | End / Side View   | Finish Options  |
|------------------|--|--|---|---|
| SP5              | <b>5" Canopy</b><br>Canopy and driver included with pendant  | <br>5" dia.<br>12.7 cm  | <br>(Integrated Driver)<br>.8" / 2 cm                              | BL Matte Black<br>PC Pol. Chrome<br>WH White<br>SG Satin Gold<br>BZ Bronze<br>SS Satin Silver |
| SP2              | <b>2.5" Fascia Canopy</b><br>Canopy included with pendant. Driver sold separately.   | <br>2.5" dia.<br>6.4 cm   | <br>(Remote Driver)<br>.4" / 1.3 cm                                | BL Matte Black<br>PC Pol. Chrome<br>WH White<br>SG Satin Gold<br>BZ Bronze<br>SS Satin Silver |
| MPC              | <b>24" Multi-Port Square - 9 Port</b><br>C-MPS-2409-#<br><br><b>24" Multi-Port Square - 25 Port</b><br>C-MPS-2425-#        | <br>8" OC 20.3 cm<br>23.9" 60.7 cm<br>4.8" OC 12.2 cm<br>23.9" 60.7 cm<br>9 Port<br>25 Port                              | <br>21.5" 54.6 cm<br>2.5" 6 cm<br>(Integrated or Remote Driver)    | BL Matte Black<br>PC Pol. Chrome<br>WH White<br>SG Satin Gold<br>BZ Bronze<br>SS Satin Silver |
| MPC              | <b>38" Multi-Port Rectangle - 10 Port</b><br>C-MPT-3810-#<br><br><b>38" Multi-Port Rectangle - 18 Port</b><br>C-MPT-3818-# | <br>7.5" OC 19 cm<br>37.7" 97.8 cm<br>3" OC 7.6 cm 10 Port<br>4.1" OC 10.4 cm<br>2.5" OC 6.4 cm 18 Port<br>37.7" 97.8 cm | <br>4.7" 11.9 cm<br>2.5" 6 cm<br>6" 15.2 cm<br>(Integrated Driver) | BL Matte Black<br>PC Pol. Chrome<br>WH White<br>SG Satin Gold<br>BZ Bronze<br>SS Satin Silver |
| MPC              | <b>22" Multi-Port Linear - 5 Port</b><br>C-MPL-2205-#<br><br><b>48" Multi-Port Linear - 11 Port</b><br>C-MPL-4811-#        | <br>4.4" OC 11.2 cm<br>21.8" 56 cm<br>2.8" 7 cm 5 Port<br>4.4" OC 11.2 cm<br>48" 123 cm<br>2.8" 7 cm 11 Port           | <br>2.8" 7 cm<br>1.4" 4 cm<br>(Integrated or Remote Driver)      | BL Matte Black<br>PC Pol. Chrome<br>WH White<br>SG Satin Gold<br>BZ Bronze<br>SS Satin Silver |
| MPC              | <b>10" Round - 3 Port</b><br>C-MPR-1003-#<br><br><b>10" Round - 9 Port</b><br>C-MPR-1009-#                                 | <br>11" dia. 27.9 cm<br>7.4" OC 18.8 cm 3 Port<br>11" dia. 27.9 cm<br>2.9" OC 7.4 cm 9 Port                            | <br>10" dia. 25.4 cm<br>2.1" 5.3 cm<br>(Integrated Driver)       | BL Matte Black<br>PC Pol. Chrome<br>WH White<br>SG Satin Gold<br>BZ Bronze<br>SS Satin Silver |
| MPC              | <b>20" Round - 3 Port</b><br>C-MPR-2003-#<br><br><b>20" Round - 12 Port</b><br>C-MPR-2012-#                                | <br>20" dia. 50.8 cm<br>14.5" OC 36.8 cm 3 Port<br>20" dia. 50.8 cm<br>6.4" OC 16.3 cm 12 Port                         | <br>18" dia. 45.7 cm<br>2.5" 6 cm<br>(Integrated Driver)         | BL Matte Black<br>PC Pol. Chrome<br>WH White<br>SG Satin Gold<br>BZ Bronze<br>SS Satin Silver |
| JTA              | <b>24" JackTrack</b><br>#-#-#<br><br><b>48" JackTrack</b><br>#-#-#<br><br><b>94" JackTrack</b><br>#-#-#                    | <br>23" 58.4 cm 1.75" 4.5 cm<br>47" 119.4 cm 1.75" 4.5 cm<br>94" 238.8 cm 1.75" 4.5 cm                                 | <br>1.38" 3.5 cm<br>1.75" 4.5 cm<br>(Remote Driver)              | BL Matte Black<br>WH White  |

For more information see [www.Blackjacklighting.com](http://www.Blackjacklighting.com)

(# symbol indicates additional specification required)


| System | Pendant Mounting | Configuration Examples | Finish Options |
|--------|------------------|------------------------|----------------|
|--------|------------------|------------------------|----------------|

**Quatro**


**4S (4' 2x2 / 9 Port)**  
MSQ-2409-##-4S-##

MPC

**Square Configurations** - See [Quatro Square Configurations](#) section of our website for specification information (#)

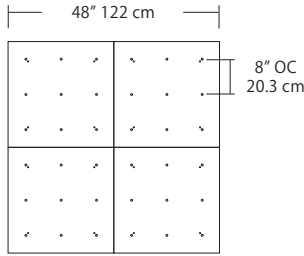


**6S (6' 3x3 / 25 Port)**  
MSQ-2425-##-6S-##

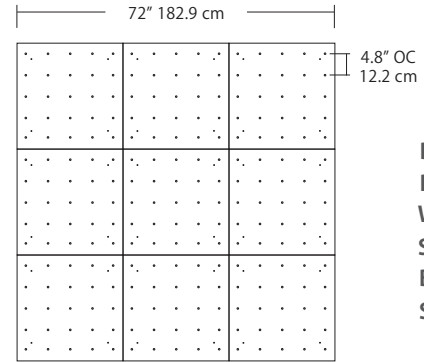


- BL** Matte Black
- PC** Pol. Chrome
- WH** White
- SG** Satin Gold
- BZ** Bronze
- SS** Satin Silver

**4L (4'x2' / 9 Port)**  
MSQ-2409-##-4L-##

**Linear Configurations** - See [Quatro Linear Configurations](#) section of our website for specification information (#)



**6L (6'x2' / 25 Port)**  
MSQ-2425-##-6L-##

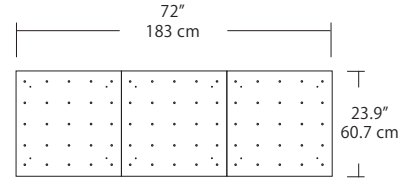


**Duo**

**6L (6'4"x6" / 10 Port)**  
MSD-3810-##-6L-##


MPC

**Linear Configurations** - See [Duo Linear Configurations](#) section of our website for specification information (#)

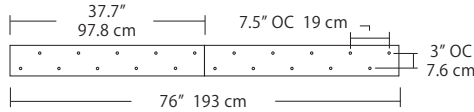



- BL** Matte Black
- PC** Pol. Chrome
- WH** White
- SG** Satin Gold
- BZ** Bronze
- SS** Satin Silver

**9L (9'6"x6" / 18 Port)**  
MSD-3818-##-9L-##

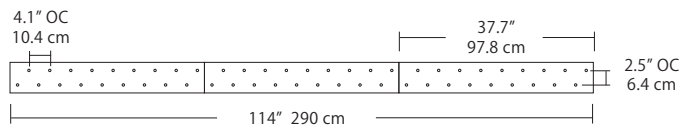

**Solo**



**Solo 48" Linear Configuration** - See [Solo Linear Configuration](#) section of our website for specific information (#)

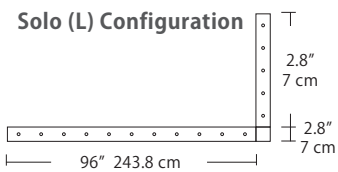

**Solo 22" Grid Configuration** - See [Solo Grid Configuration](#) section of our website for specific information (#)

MPC

**Solo 48" Grid Configuration**

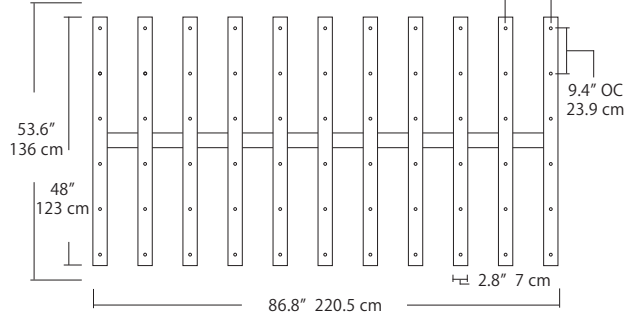

- BL** Matte Black
- PC** Pol. Chrome
- WH** White
- SG** Satin Gold
- BZ** Bronze
- SS** Satin Silver