

Project:

Note:

Type:

Quantity:

Model#: SP - SPS - - 08 - - - - -

Description

Our blown glass sphere pendants appear to be floating in air around a glowing cylinder of light. This light weight and translucent pendant creates an interesting volume to help fill a space.

Features

- Includes the frosted light guide diffuser
- Suspends from an 8' adjustable cable
- Damp location rated


Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K (standard)
- Cable Length: 8' (see page 2 for detail), for longer lengths consult factory
- For recommended dimmers see <https://www.blackjacklighting.com/dimming-information>

Options

- Color Temperature: 2700K, 3000K, 3500K, 4000K
- Diffuser Options: CL - Clear, WF - White Frosted, SM - Smoked
- Lumens: 2W/ 90 Lumens or 3W / 140 Lumens
- Lamping: 2W or 3W
- Standard Socket Finishes: BL - Black, PC - Polished Chrome or WH - White
- Special Order Socket Powder Coat Finishes: BZ - Bronze, SG - Satin Gold or SS - Satin Silver
- Mounting: See page 2 for mounting options

Dimensions

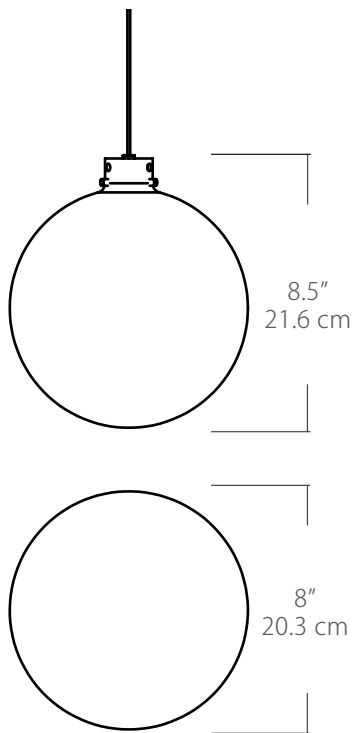

Diffusers



CL - Clear



WF - White Frosted



SM - Smoked



ORDERING GUIDE

Category	Series	Diffuser	Size	Finish	Color Temp.	Wattage	Mounting	Length
SP	SPS		08		30K			
SP Small Pendant	SPS Small Glass Sphere	CL Clear WF White Frosted SM Smoked	08 8" Diameter	Standard BL Black PC Polished Chrome WH White Special Order BZ Bronze SG Satin Gold SS Satin Silver	27K 2700K 30K 3000K 35K 3500K 40K 4000K	2W 2Watts/ 90 Lm 3W 3Watts/ 140Lm (recommended for single pendant application)	SP5 5" Canopy SP2 2.5" Fascia Canopy MPC Multi-Port Connector JTA JackTrack Adapter	BLANK (Leave blank for standard 96" cable length) ### for cable length longer than 96" specify cable length in inches
						(30K Standard)	(See page 2 for mounting information)	

Example: SP-SPS-SM-08-BL-30K-2W-SP5-

Finish


<p>Finish</p> <div style="border: 1px solid black; width: 40px; height: 20px; margin: 5px;"></div> <p>PC BL WH BZ SG SS</p>		
	<p>PC - Polished Chrome BL - Matte Black WH - White</p> <p>Standard Finishes</p>	<p>BZ - Bronze SG - Satin Gold SS - Satin Silver</p> <p>Special Order Powder Coat Finishes</p>

Wattage

<p>Wattage</p> <div style="border: 1px solid black; width: 40px; height: 20px; margin: 5px;"></div> <p>2W</p>	<p>2W = 2 Watts / 90 Lumens, recommended for Multi-Port applications (Multi-Port system and JackTrack adapter).</p> <p>3W = 3 Watts / 140 Lumens, recommended for single pendant applications (5" Canopy and 2.5" Fascia Canopy).</p> <p>(Lumens measured at 3000K)</p>
--	---

Mounting

<p>Mounting</p> <div style="border: 1px solid black; width: 40px; height: 20px; margin: 5px;"></div> <p>SP5 SP2 MPC JTA</p>	<p>SP5 = 5" canopy with integrated driver (included), attaches to rear of canopy and sits inside ceiling mounted junction box <i>Cable with modular connector attaches to canopy w/ integrated universal driver (120-277V / TRIAC, ELV, 0-10V dimming)</i></p> <p>SP2 = 2.5" thin profile canopy that attaches flush to a rigid ceiling (driver sold separately) <i>Cable with modular connector (and optional wire harness) attaches to a remote driver</i></p> <p>MPC = Multi-port connector attaches to any of BlackJack's Multi-Port canopies (canopy and driver sold separately) <i>Cable with modular connector attaches to a driver inside a Multi-Port canopy (driver may be remote)</i></p> <p>JTA = Adapter connects the pendant in any position along the JackTrack system (track and driver sold separately) <i>Cable is cut to length and inserted in a connector at the bottom of the JackTrack adapter</i></p>
--	---



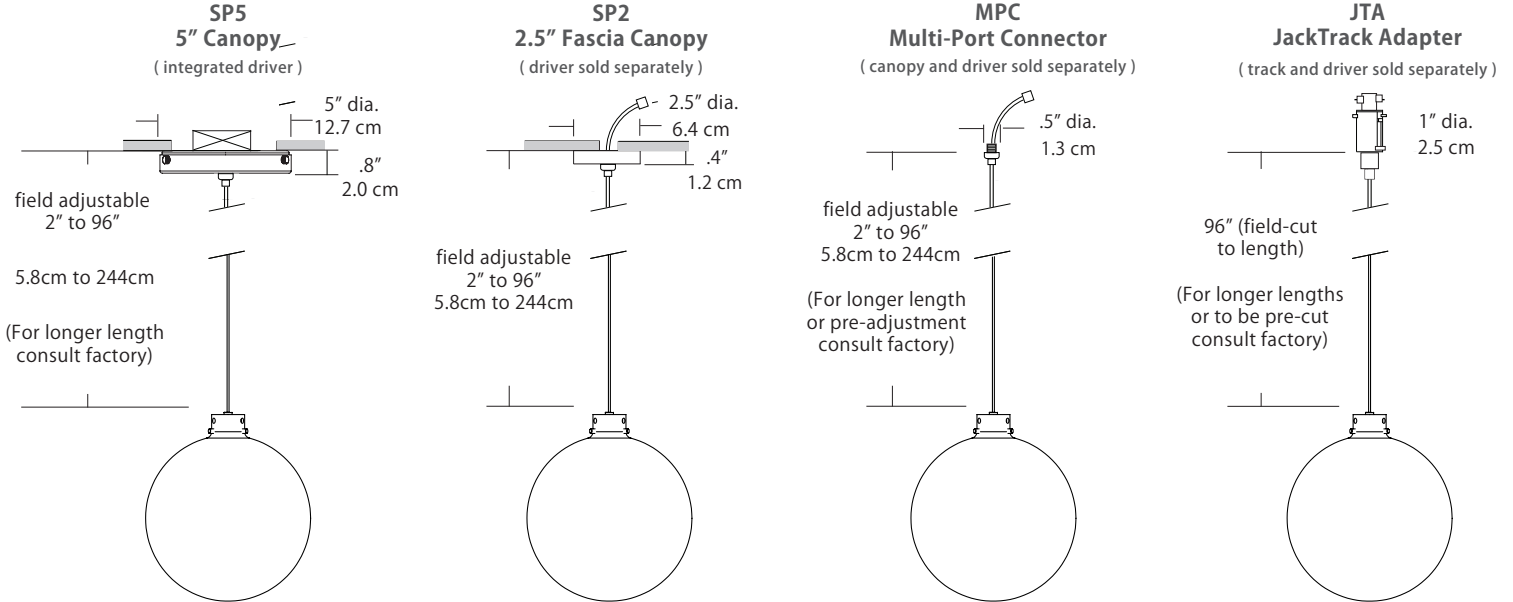

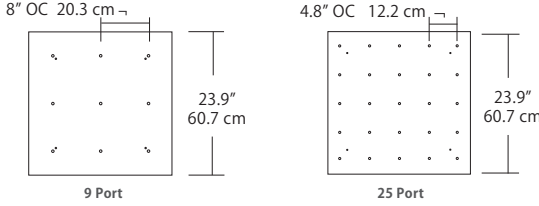

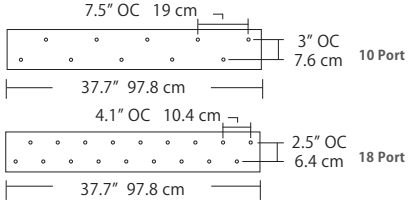

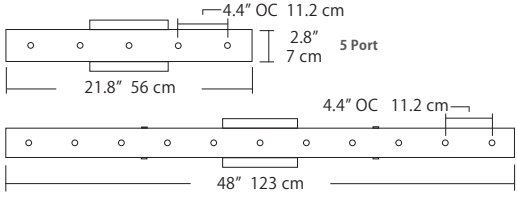

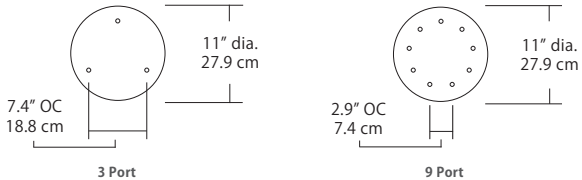

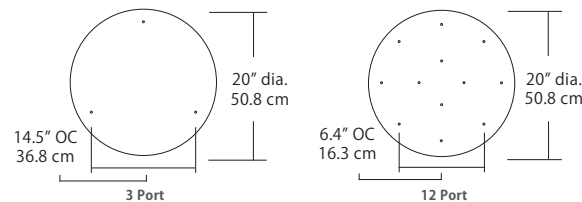

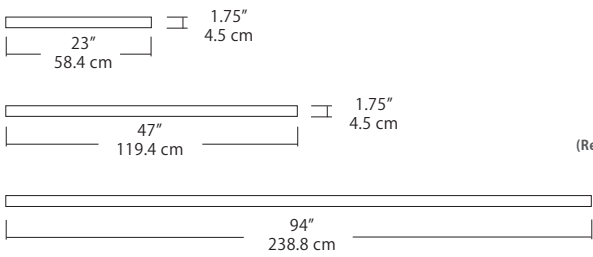



Max Cable Length

<p>Length</p> <div style="border: 1px solid black; width: 40px; height: 20px; margin: 5px;"></div> <p>BLANK ###</p>	<p>BLANK = Leave blank for standard 96" cable length.</p> <p>### = Specify maximum cable length needed for fixture (in inches).</p> <p>Factory pre-configuration of cable length is available. Consult factory for details.</p>
--	---

For full specifications and ordering information see blackjacklighting.com

(# symbol indicates additional specification required)

Pendant Mounting	Canopy	Dimensions	End / Side View	Finish Options
SP5	5" Canopy Canopy and driver included with pendant	 5" dia. 12.7 cm	 (Integrated Driver) .8" / 2 cm	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
SP2	2.5" Fascia Canopy Canopy included with pendant. Driver sold separately.	 2.5" dia. 6.4 cm	 (Remote Driver) .4" / 1.3 cm	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	24" Multi-Port Square - 9 Port C-MPS-2409-# 24" Multi-Port Square - 25 Port C-MPS-2425-#	 8" OC 20.3 cm 23.9" 60.7 cm 4.8" OC 12.2 cm 23.9" 60.7 cm 9 Port 25 Port	 21.5" 54.6 cm 2.5" 6 cm (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	38" Multi-Port Rectangle - 10 Port C-MPT-3810-# 38" Multi-Port Rectangle - 18 Port C-MPT-3818-#	 7.5" OC 19 cm 37.7" 97.8 cm 3" OC 7.6 cm 10 Port 4.1" OC 10.4 cm 2.5" OC 6.4 cm 18 Port 37.7" 97.8 cm	 4.7" 11.9 cm 2.5" 6 cm 6" 15.2 cm (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	22" Multi-Port Linear - 5 Port C-MPL-2205-# 48" Multi-Port Linear - 11 Port C-MPL-4811-#	 4.4" OC 11.2 cm 21.8" 56 cm 2.8" 7 cm 5 Port 4.4" OC 11.2 cm 48" 123 cm 2.8" 7 cm 11 Port	 2.8" 7 cm 1.4" 4 cm (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	10" Round - 3 Port C-MPR-1003-# 10" Round - 9 Port C-MPR-1009-#	 7.4" OC 18.8 cm 11" dia. 27.9 cm 3 Port 2.9" OC 7.4 cm 11" dia. 27.9 cm 9 Port	 10" dia. 25.4 cm 2.1" 5.3 cm (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	20" Round - 3 Port C-MPR-2003-# 20" Round - 12 Port C-MPR-2012-#	 14.5" OC 36.8 cm 20" dia. 50.8 cm 3 Port 6.4" OC 16.3 cm 20" dia. 50.8 cm 12 Port	 18" dia. 45.7 cm 2.5" 6 cm (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
JTA	24" JackTrack #-#-# 48" JackTrack #-#-# 94" JackTrack #-#-#	 23" 58.4 cm 1.75" 4.5 cm 47" 119.4 cm 1.75" 4.5 cm 94" 238.8 cm 1.75" 4.5 cm	 1.38" 3.5 cm 1.75" 4.5 cm (Remote Driver)	BL Matte Black WH White

For more information see www.Blackjacklighting.com

(# symbol indicates additional specification required)


System	Pendant Mounting	Configuration Examples	Finish Options
--------	------------------	------------------------	----------------

Quatro


4S (4' 2x2 / 9 Port)
MSQ-2409-##-4S-##

MPC

Square Configurations - See [Quatro Square Configurations](#) section of our website for specification information (#)

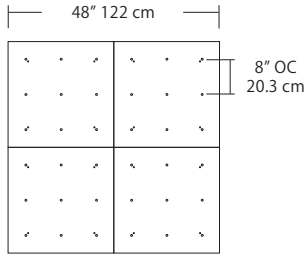


6S (6' 3x3 / 25 Port)
MSQ-2425-##-6S-##

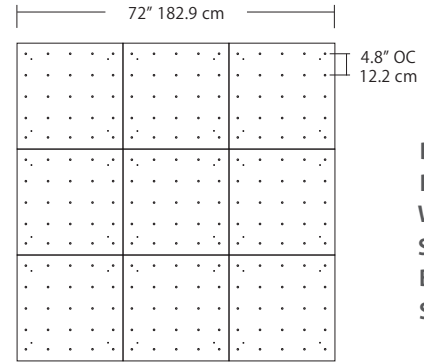


- BL** Matte Black
- PC** Pol. Chrome
- WH** White
- SG** Satin Gold
- BZ** Bronze
- SS** Satin Silver

4L (4'x2' / 9 Port)
MSQ-2409-##-4L-##

Linear Configurations - See [Quatro Linear Configurations](#) section of our website for specification information (#)



6L (6'x2' / 25 Port)
MSQ-2425-##-6L-##

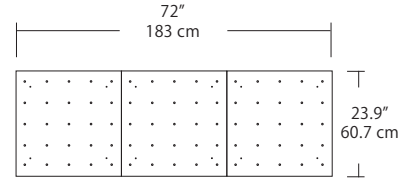


Duo


6L (6'4"x6" / 10 Port)
MSD-3810-##-6L-##

MPC

Linear Configurations - See [Duo Linear Configurations](#) section of our website for specification information (#)





9L (9'6"x6" / 18 Port)
MSD-3818-##-9L-##

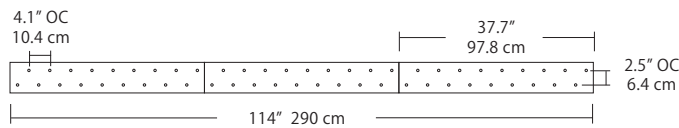

- BL** Matte Black
- PC** Pol. Chrome
- WH** White
- SG** Satin Gold
- BZ** Bronze
- SS** Satin Silver

Solo



Solo 48" Linear Configuration - See [Solo Linear Configuration](#) section of our website for specific information (#)

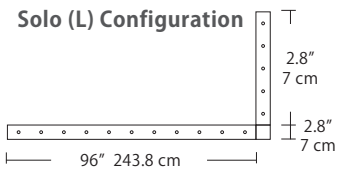

Solo 22" Grid Configuration - See [Solo Grid Configuration](#) section of our website for specific information (#)

MPC

Solo 48" Grid Configuration

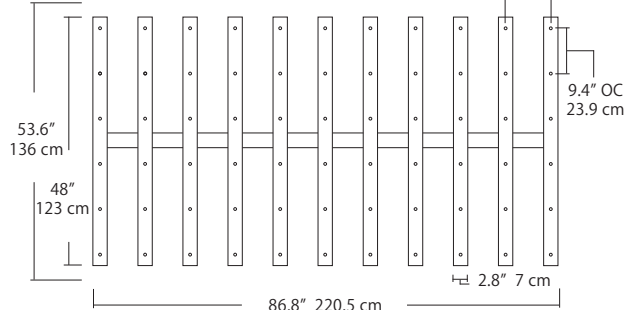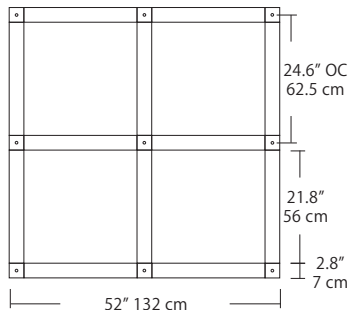

- BL** Matte Black
- PC** Pol. Chrome
- WH** White
- SG** Satin Gold
- BZ** Bronze
- SS** Satin Silver