

**Project:**

**Note:**

**Type:**

**Quantity:**

**Model#:** SP - BL4 - FR - 04 -      -      - 2W -      -     

**Description**

The Bullet pendant includes a spun metal shade with a screw-in optical short frosted light guide. Canopy not included (Ordered separately).

**Specifications**

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K (standard)
- Cable Length: 8' (see page 2 for detail), for longer lengths consult factory
- For recommended dimmers see <https://www.blackjacklighting.com/dimming-information>

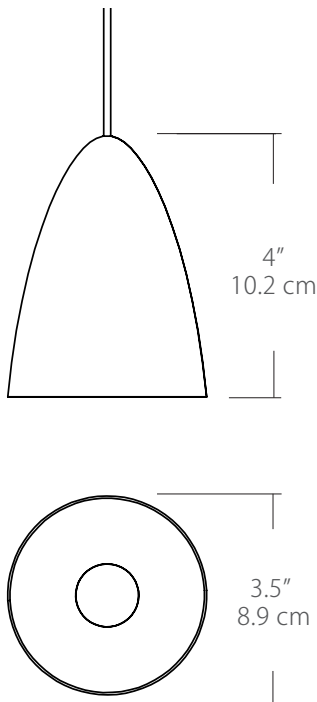
**Features**

- Screw-in optical acrylic light guide
- Suspends from an 8' adjustable cable
- Damp location rated

**Options**

- Color Temperature: 2700K, 3000K, 3500K, 4000K
- Lumens: 2W/ 90 Lumens or 3W / 140 Lumens
- Lamping: 2W or 3W
- Finishes: BC - Black w/ Copper Interior, WG - White w/ Gold Interior
- Mounting: See page 2 for mounting options

**Dimensions**



**Diffusers**



**BC** - Black w/  
Copper Interior



**WG** - White w/  
Gold Interior





**ORDERING GUIDE**

Category	Series	Diffuser	Size	Finish	Color Temp.	Wattage	Mounting	Length
<b>SP</b>	<b>BL4</b>	<b>LR</b>	<b>04</b>		<b>30K</b>	<b>2W</b>		
SP Small Pendant	BL4 Bullet 4"	LR Luminous Ring	04 4" Diameter	BC Black w/ Copper Interior WG White w/ Gold Interior	27K 2700K 30K 3000K 35K 3500K 40K 4000K	2W 2Watts/ 90 Lm 3W 3Watts/ 140Lm (recommended for single pendant application)	SP5 5" Canopy SP2 2.5" Fascia Canopy MPC Multi-Port Connector JTA JackTrack Adapter <small>(See page 2 for mounting information)</small>	BLANK (Leave blank for standard 96" cable length) ### for cable length longer than 96" specify cable length in inches
					(30K Standard)			

Example: SP-BL4-LR-04-BC-30K-2W-SP2-

**Finish**

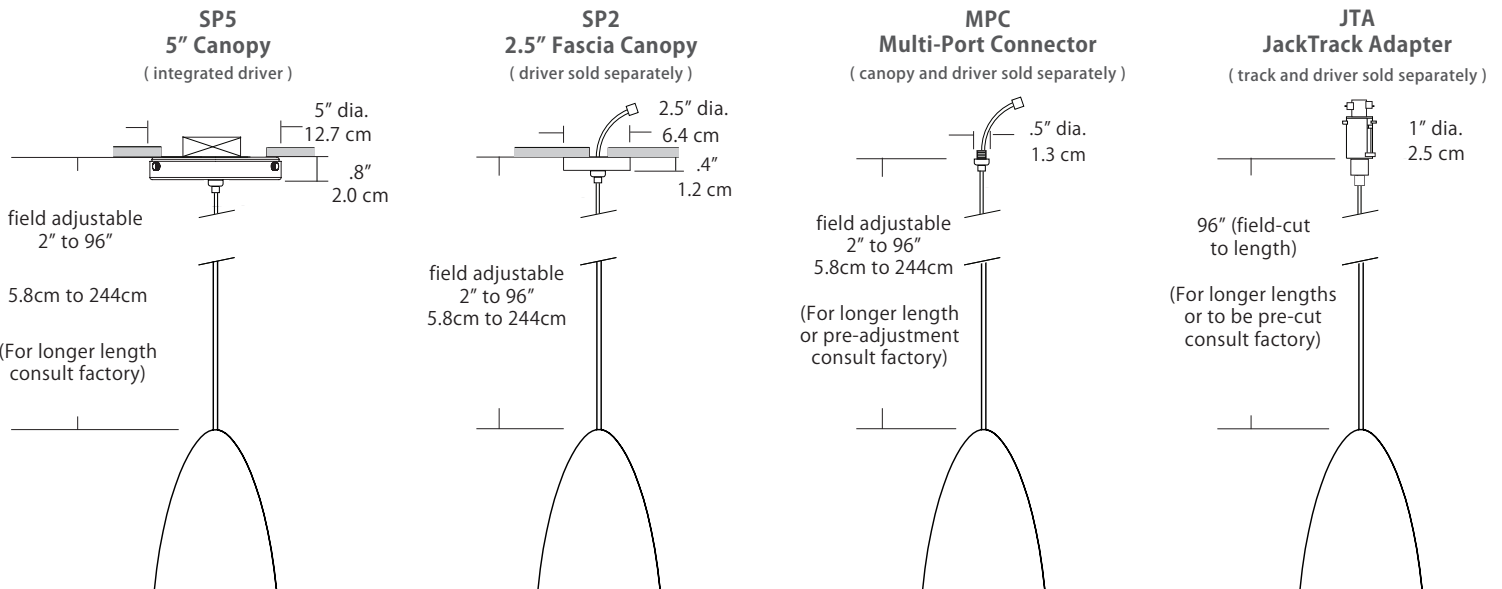
<b>Finish</b>		
<input type="checkbox"/>	<b>BC</b> - Black with Copper Interior	<b>WG</b> - White with Gold Interior
<b>BC</b>		
<b>WG</b>		

**Wattage**

<b>Wattage</b>	<p><b>2W</b> = 2 Watts / 90 Lumens, recommended for Multi-Port applications (Multi-Port system and JackTrack adapter).</p> <p><b>3W</b> = 3 Watts / 140 Lumens, recommended for single pendant applications (5" Canopy and 2.5" Fascia Canopy).</p> <p>(Lumens measured at 3000K)</p>
<input type="checkbox"/>	
<b>2W</b>	

**Mounting**

<b>Mounting</b>	<p><b>SP5</b> = 5" canopy with integrated driver (included), attaches to rear of canopy and sits inside ceiling mounted junction box <i>Cable with modular connector attaches to canopy w/ integrated universal driver (120-277V / TRIAC, ELV, 0-10V dimming)</i></p> <p><b>SP2</b> = 2.5" thin profile canopy that attaches flush to a rigid ceiling (driver sold separately) <i>Cable with modular connector (and optional wire harness) attaches to a remote driver</i></p> <p><b>MPC</b> = Multi-port connector attaches to any of BlackJack's Multi-Port canopies (canopy and driver sold separately) <i>Cable with modular connector attaches to a driver inside a Multi-Port canopy (driver may be remote)</i></p> <p><b>JTA</b> = Adapter connects the pendant in any position along the JackTrack system (track and driver sold separately) <i>Cable is cut to length and inserted in a connector at the bottom of the JackTrack adapter</i></p>
<input type="checkbox"/>	
<b>SP5</b>	
<b>SP2</b>	
<b>MPC</b>	
<b>JTA</b>	



















**Max Cable Length**

<b>Length</b>	<p><b>BLANK</b> = Leave blank for standard 96" cable length.</p> <p><b>###</b> = Specify maximum cable length needed for fixture (in inches).</p> <p>Factory pre-configuration of cable length is available. Consult factory for details.</p>
<input type="checkbox"/>	
<b>BLANK</b>	
<b>###</b>	

For full specifications and ordering information see [blackjacklighting.com](http://blackjacklighting.com)

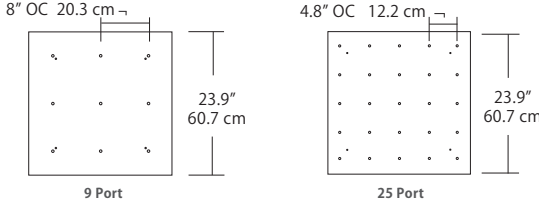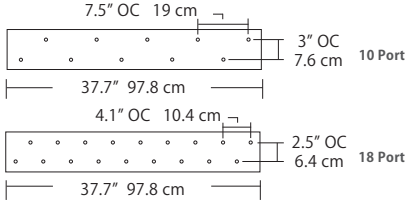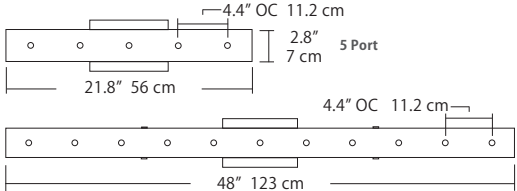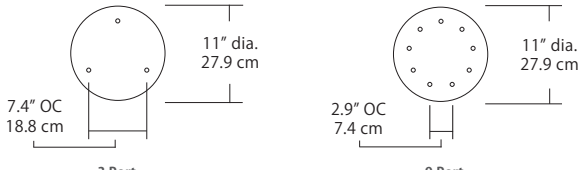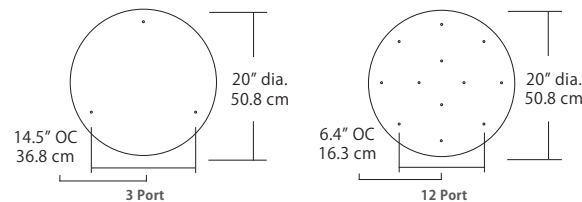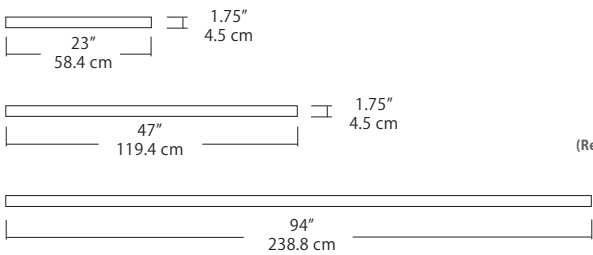(# symbol indicates additional specification required)

Pendant Mounting	Canopy	Dimensions	End / Side View	Finish Options
SP5	<b>5" Canopy</b> Canopy and driver included with pendant	 5" dia. 12.7 cm	 (Integrated Driver) .8" / 2 cm	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
SP2	<b>2.5" Fascia Canopy</b> Canopy included with pendant. Driver sold separately.	 2.5" dia. 6.4 cm	 (Remote Driver) .4" / 1.3 cm	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	<b>24" Multi-Port Square - 9 Port</b> C-MPS-2409-#  <b>24" Multi-Port Square - 25 Port</b> C-MPS-2425-#	 8" OC 20.3 cm 23.9" 60.7 cm 4.8" OC 12.2 cm 23.9" 60.7 cm 9 Port 25 Port	 21.5" 54.6 cm 2.5" 6 cm (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	<b>38" Multi-Port Rectangle - 10 Port</b> C-MPT-3810-#  <b>38" Multi-Port Rectangle - 18 Port</b> C-MPT-3818-#	 7.5" OC 19 cm 37.7" 97.8 cm 3" OC 7.6 cm 10 Port 4.1" OC 10.4 cm 2.5" OC 6.4 cm 18 Port 37.7" 97.8 cm	 4.7" 11.9 cm 2.5" 6 cm 6" 15.2 cm (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	<b>22" Multi-Port Linear - 5 Port</b> C-MPL-2205-#  <b>48" Multi-Port Linear - 11 Port</b> C-MPL-4811-#	 4.4" OC 11.2 cm 21.8" 56 cm 2.8" 7 cm 5 Port 4.4" OC 11.2 cm 48" 123 cm 2.8" 7 cm 11 Port	 2.8" 7 cm 1.4" 4 cm (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	<b>10" Round - 3 Port</b> C-MPR-1003-#  <b>10" Round - 9 Port</b> C-MPR-1009-#	 11" dia. 27.9 cm 7.4" OC 18.8 cm 3 Port 11" dia. 27.9 cm 2.9" OC 7.4 cm 9 Port	 10" dia. 25.4 cm 2.1" 5.3 cm (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	<b>20" Round - 3 Port</b> C-MPR-2003-#  <b>20" Round - 12 Port</b> C-MPR-2012-#	 20" dia. 50.8 cm 14.5" OC 36.8 cm 3 Port 20" dia. 50.8 cm 6.4" OC 16.3 cm 12 Port	 18" dia. 45.7 cm 2.5" 6 cm (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
JTA	<b>24" JackTrack</b> #-#-#  <b>48" JackTrack</b> #-#-#  <b>94" JackTrack</b> #-#-#	 23" 58.4 cm 1.75" 4.5 cm 47" 119.4 cm 1.75" 4.5 cm 94" 238.8 cm 1.75" 4.5 cm	 1.38" 3.5 cm 1.75" 4.5 cm (Remote Driver)	BL Matte Black WH White

For more information see [www.Blackjacklighting.com](http://www.Blackjacklighting.com)


(# symbol indicates additional specification required)

System	Pendant Mounting	Configuration Examples	Finish Options
--------	------------------	------------------------	----------------


**Quatro**

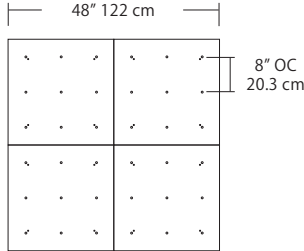**Square Configurations** - See [Quatro Square Configurations](#) section of our website for specification information (#)

**4S (4' 2x2 / 9 Port)**  
MSQ-2409-##-4S-##



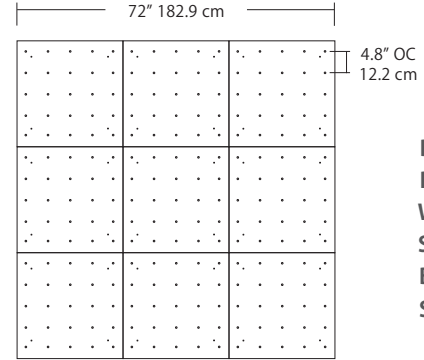**6S (6' 3x3 / 25 Port)**  
MSQ-2425-##-6S-##




MPC


- BL** Matte Black
- PC** Pol. Chrome
- WH** White
- SG** Satin Gold
- BZ** Bronze
- SS** Satin Silver

**Linear Configurations** - See [Quatro Linear Configurations](#) section of our website for specification information (#)

**4L (4'x2' / 9 Port)**  
MSQ-2409-##-4L-##



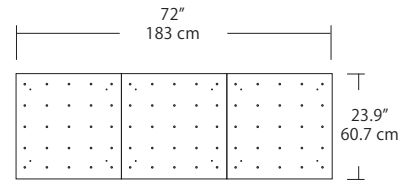
**6L (6'x2' / 25 Port)**  
MSQ-2425-##-6L-##



**Duo**

**Linear Configurations** - See [Duo Linear Configurations](#) section of our website for specification information (#)

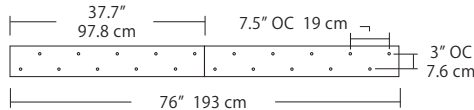
**6L (6'4"x6" / 10 Port)**  
MSD-3810-##-6L-##



MPC


- BL** Matte Black
- PC** Pol. Chrome
- WH** White
- SG** Satin Gold
- BZ** Bronze
- SS** Satin Silver

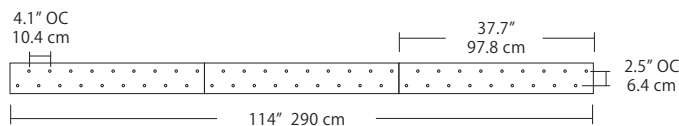**9L (9'6"x6" / 18 Port)**  
MSD-3818-##-9L-##




**Solo**

**Solo 48" Linear Configuration** - See [Solo Linear Configuration](#) section of our website for specific information (#)




**Solo (L) Configuration**

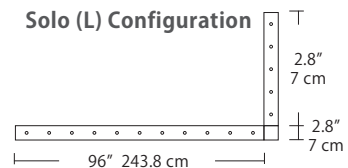

MPC

- BL** Matte Black
- PC** Pol. Chrome
- WH** White
- SG** Satin Gold
- BZ** Bronze
- SS** Satin Silver

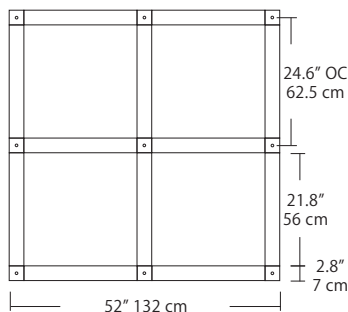**Solo 22" Grid Configuration** - See [Solo Grid Configuration](#) section of our website for specific information (#)



**Solo 48" Grid Configuration**

