

Project:

Note:

Type:

Quantity:

Model#: SP - LGD - GR - 01 - ___ - ___ - ___ - ___ - ___

Description

Dynamic and elegant, the Gradient pendant features a clear acrylic diffuser with beautiful lathe-etched concentric rings in a gradient pattern. Light from the integrated LED source evenly illuminates the diffuser and disperses into the space.

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K (standard)
- Cable Length: 8' (see page 2 for detail), for longer lengths consult factory
- For recommended dimmers see <https://www.blackjacklighting.com/dimming-information>


Features

- Screw-in, decorative optical acrylic light guide
- Suspends from an 8' adjustable cable
- Damp location rated

Options

- Color Temperature: 2700K, 3000K, 3500K, 4000K
- Lumens: 2W/90 Lumens or 3W/140 Lumens (recommended for single pendant application)
- Lamping: 2W or 3W
- Standard Finishes: BL - Black, PC - Polished Chrome or WH - White
- Special Order Powder Coat Finishes: BZ - Bronze, SG - Satin Gold or SS - Satin Silver
- Mounting: See page 2 for mounting options

Dimensions

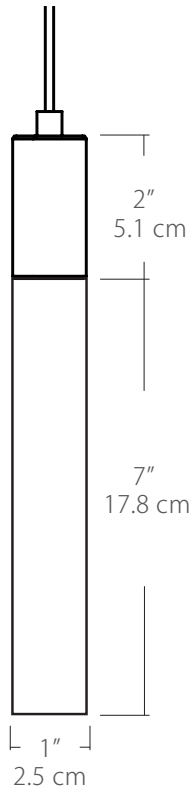

Diffuser



ORDERING GUIDE

Category	Series	Diffuser	Size	Finish	Color Temp.	Wattage	Mounting	Length
SP SP Small Pendant	LGD LGD Light Guide	GR GR Gradient	01 01 1" Diameter	BL Black PC Polished Chrome WH White BZ Bronze SG Satin Gold SS Satin Silver	27K 2700K 30K 3000K 35K 3500K 40K 4000K	2W 2Watts/ 90Lm 3W 3Watts/ 140Lm (recommended for single pendant application)	SP5 5" Canopy SP2 2.5" Fascia Canopy MPC Multi-Port Connector JTA JackTrack Adapter (See page 2 for mounting information)	BLANK (Leave blank for standard 96" cable length) ### for cable length longer than 96" specify cable length in inches

Example: SP-LGD-GR-01-BL-30K-2W-SP2-

(30K Standard)

Finish


<p>Finish</p> <div style="background-color: #cccccc; width: 40px; height: 20px; margin: 5px;"></div> <p>PC BL WH BZ SG SS</p>	<p>PC - Polished Chrome</p>	<p>BL - Matte Black</p>	<p>WH - White</p>	<p>BZ - Bronze</p>	<p>SG - Satin Gold</p>	<p>SS - Satin Silver</p>
	<p>Standard Finishes</p>			<p>Special Order Powder Coat Finishes</p>		

Wattage

<p>Wattage</p> <div style="background-color: #cccccc; width: 40px; height: 20px; margin: 5px;"></div> <p>2W 3W</p>	<p>2W = 2 Watts / 90 Lumens, recommended for Multi-Port applications (Multi-Port system and JackTrack adapter).</p> <p>3W = 3 Watts / 140 Lumens, recommended for single pendant applications (5" Canopy and 2.5" Fascia Canopy).</p> <p>(Lumens measured at 3000K)</p>
---	---

Mounting

<p>Mounting</p> <div style="background-color: #cccccc; width: 40px; height: 20px; margin: 5px;"></div> <p>SP5 SP2 MPC JTA</p>	<p>SP5 = 5" canopy with integrated driver (included), attaches to rear of canopy and sits inside ceiling mounted junction box <i>Cable with modular connector attaches to canopy w/ integrated universal driver (120-277V / TRIAC, ELV, 0-10V dimming)</i></p> <p>SP2 = 2.5" thin profile canopy that attaches flush to a rigid ceiling (driver sold separately) <i>Cable with modular connector (and optional wire harness) attaches to a remote driver</i></p> <p>MPC = Multi-port connector attaches to any of BlackJack's Multi-Port canopies (canopy and driver sold separately) <i>Cable with modular connector attaches to a driver inside a Multi-Port canopy (driver may be remote)</i></p> <p>JTA = Adapter connects the pendant in any position along the JackTrack system (track and driver sold separately) <i>Cable is cut to length and inserted in a connector at the bottom of the JackTrack adapter</i></p>
--	---



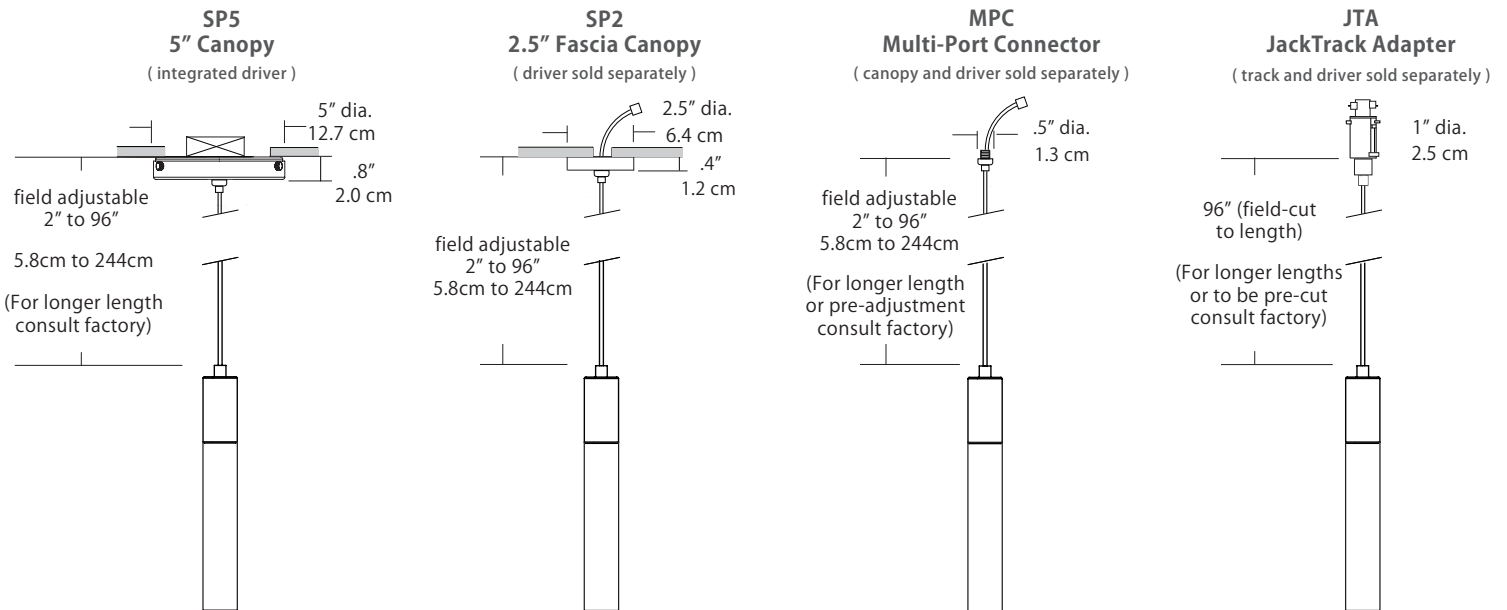

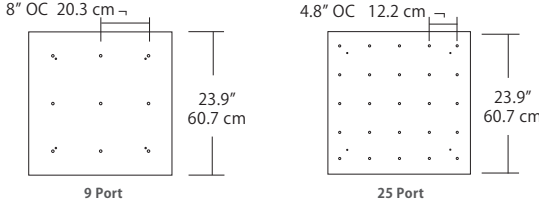

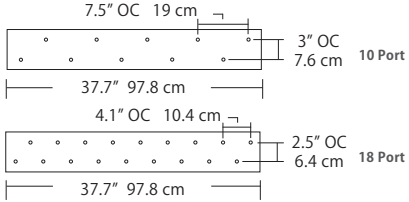

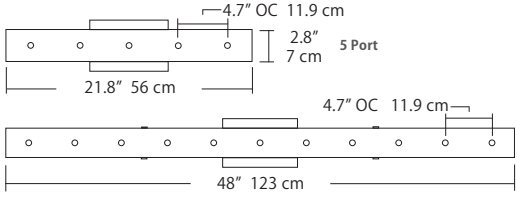

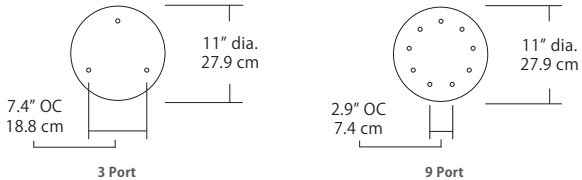

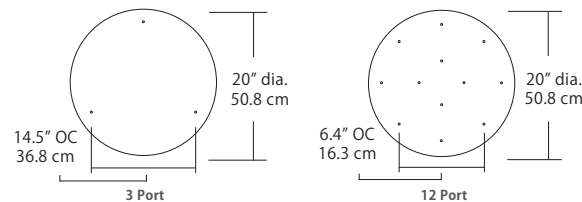

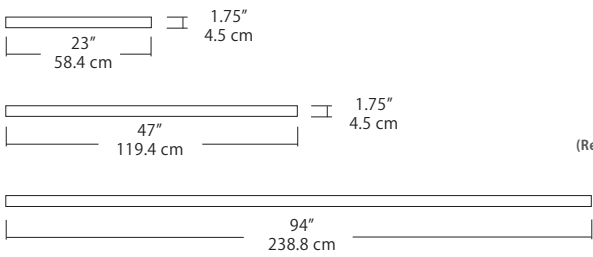



Max Cable Length

<p>Length</p> <div style="background-color: #cccccc; width: 40px; height: 20px; margin: 5px;"></div> <p>BLANK ###</p>	<p>BLANK = Leave blank for standard 96" cable length.</p> <p>### = Specify maximum cable length needed for fixture (in inches).</p> <p>Factory pre-configuration of cable length is available. Consult factory for details.</p>
--	---

For full specifications and ordering information see blackjacklighting.com

(# symbol indicates additional specification required)

Pendant Mounting	Canopy	Dimensions	End / Side View	Finish Options
SP5	5" Canopy Canopy and driver included with pendant	 5" dia. 12.7 cm	 (Integrated Driver) .8" / 2 cm	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
SP2	2.5" Fascia Canopy Canopy included with pendant. Driver sold separately.	 2.5" dia. 6.4 cm	 (Remote Driver) .4" / 1.3 cm	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	24" Multi-Port Square - 9 Port C-MPS-2409-# 24" Multi-Port Square - 25 Port C-MPS-2425-#	 8" OC 20.3 cm 23.9" 60.7 cm 4.8" OC 12.2 cm 23.9" 60.7 cm 9 Port 25 Port	 21.5" 54.6 cm 2.5" 6 cm (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	38" Multi-Port Rectangle - 10 Port C-MPT-3810-# 38" Multi-Port Rectangle - 18 Port C-MPT-3818-#	 7.5" OC 19 cm 37.7" 97.8 cm 3" OC 7.6 cm 10 Port 4.1" OC 10.4 cm 2.5" OC 6.4 cm 18 Port 37.7" 97.8 cm	 4.7" 11.9 cm 2.5" 6 cm 6" 15.2 cm (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	22" Multi-Port Linear - 5 Port C-MPL-2205-# 48" Multi-Port Linear - 11 Port C-MPL-4811-#	 4.7" OC 11.9 cm 21.8" 56 cm 2.8" 7 cm 5 Port 4.7" OC 11.9 cm 48" 123 cm 2.8" 7 cm 11 Port	 2.8" 7 cm 1.4" 4 cm (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	10" Round - 3 Port C-MPR-1003-# 10" Round - 9 Port C-MPR-1009-#	 7.4" OC 18.8 cm 3 Port 11" dia. 27.9 cm 2.9" OC 7.4 cm 9 Port 11" dia. 27.9 cm	 10" dia. 25.4 cm 2.1" 5.3 cm (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	20" Round - 3 Port C-MPR-2003-# 20" Round - 12 Port C-MPR-2012-#	 14.5" OC 36.8 cm 3 Port 20" dia. 50.8 cm 6.4" OC 16.3 cm 12 Port 20" dia. 50.8 cm	 18" dia. 45.7 cm 2.5" 6 cm (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
JTA	24" JackTrack #-#-# 48" JackTrack #-#-# 94" JackTrack #-#-#	 23" 58.4 cm 1.75" 4.5 cm 47" 119.4 cm 1.75" 4.5 cm 94" 238.8 cm 1.75" 4.5 cm	 1.38" 3.5 cm 1.75" 4.5 cm (Remote Driver)	BL Matte Black WH White

For more information see www.Blackjacklighting.com

(# symbol indicates additional specification required)


System	Pendant Mounting	Configuration Examples	Finish Options
--------	------------------	------------------------	----------------

Quatro


4S (4' 2x2 / 9 Port)
MSQ-2409-##-4S-##

MPC

Square Configurations - See [Quatro Square Configurations](#) section of our website for specification information (#)




6S (6' 3x3 / 25 Port)
MSQ-2425-##-6S-##

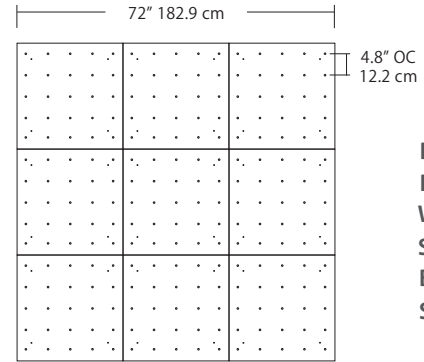


- BL** Matte Black
- PC** Pol. Chrome
- WH** White
- SG** Satin Gold
- BZ** Bronze
- SS** Satin Silver

4L (4'x2' / 9 Port)
MSQ-2409-##-4L-##

Linear Configurations - See [Quatro Linear Configurations](#) section of our website for specification information (#)



6L (6'x2' / 25 Port)
MSQ-2425-##-6L-##


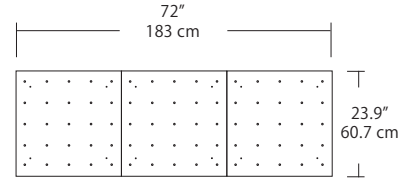


Duo

6L (6'4"x6" / 10 Port)
MSD-3810-##-6L-##

MPC

Linear Configurations - See [Duo Linear Configurations](#) section of our website for specification information (#)

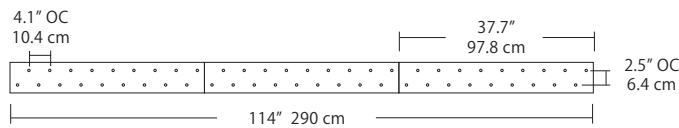


9L (9'6"x6" / 18 Port)
MSD-3818-##-9L-##


- BL** Matte Black
- PC** Pol. Chrome
- WH** White
- SG** Satin Gold
- BZ** Bronze
- SS** Satin Silver

Solo

Solo 48" Linear Configuration - See [Solo Linear Configuration](#) section of our website for specific information (#)




Solo (L) Configuration




Solo 22" Grid Configuration - See [Solo Grid Configuration](#) section of our website for specific information (#)

MPC



Solo 48" Grid Configuration

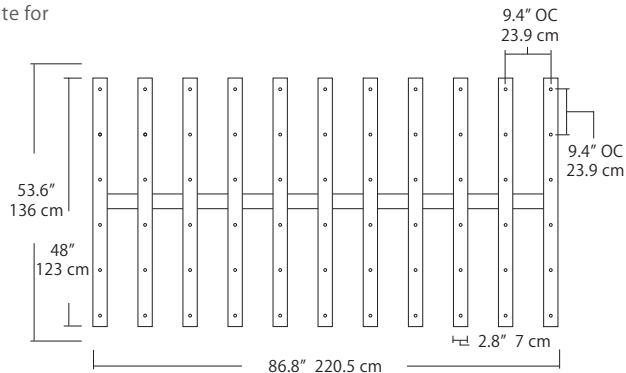

- BL** Matte Black
- PC** Pol. Chrome
- WH** White
- SG** Satin Gold
- BZ** Bronze
- SS** Satin Silver