

Project: _____ Type: _____ Quantity: _____

Note: _____ SKU#: SP - LGD - GR - 01 - ____ - ____ - ____ - ____ - ____

Description

Featuring horizontal laser-etched rings, the Gradient pendant is crafted from clear acrylic. Light from the integrated LED source travels through the diffuser to illuminate the rings and add a dramatic, magical, accent to any space.

Features

- Screw-in, decorative optical acrylic light guide
- Suspends from an 8' adjustable cable
- Damp location rated



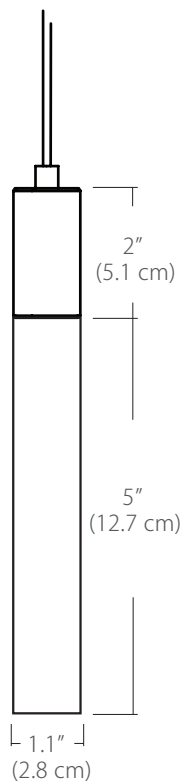
Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K (standard)
- Cable Length: 8' (for longer lengths consult factory)
- For recommended dimmers, see <http://blackjacklighting.com>

Options

- Color Temperature: 2700K, 3000K, 3500K, 4000K
- Lumens: 2W/86 Lumens or 3W/133 Lumens (recommended for single pendant application)
- Lamping 2W or 3W
- Standard Finishes: BL - Black, PC - Polished Chrome, or WH - White
- Special Order Powder Coat Finishes: BZ - Bronze, SG - Satin Gold, or SS - Satin Silver
- Mounting: See page 2 for mounting options

Dimensions



Diffuser



ORDERING GUIDE

Category	Series	Diffuser	Size	Finish	Color Temp.	Wattage	Mounting	Length
SP	LGD	GR	01		30K			
SP Small Pendant	LGD Light Guide	GR Gradient	01 1" Diameter	Standard BL Black PC Polished Chrome WH White Special Order BZ Bronze SG Satin Gold SS Satin Silver	27K 2700K 30K 3000K 35K 3500K 40K 4000K (30K Standard)	2W 2Watts/ 90 Lm 3W 3Watts/ 133 Lm (recommended for single pendant application)	SP5 5" Canopy SP2 2.5" Fascia Canopy MPC Multi-Port Connector JTA JackTrack Adapter (See page 2 for mounting information)	96" Standard (Change Length for custom cable length in inches)

Example: SP-LGD-GR-01-BL-30K-2W-SP2-96

Finish


Finish						
						
PC BL WH BZ SG SS	PC - Polished Chrome	BL - Matte Black	WH - White	BZ - Bronze	SG - Satin Gold	SS - Satin Silver
	Standard Finishes			Special Order Powder Coat Finishes		

Wattage

Wattage	
	2W = 2 Watts / 86 Lumens, recommended for Multi-Port applications (Multi-Port system and JackTrack adapter). 3W = 3 Watts / 133 Lumens, recommended for single pendant applications (5" Canopy and 2.5" Fascia Canopy).
2W	(Lumens measured at 3000K)
3W	

Mounting

Mounting	
	SP5 = 5" canopy with integrated driver (included), attaches to rear of canopy and sits inside ceiling mounted junction box Cable with modular connector attaches to canopy w/ integrated universal driver (120-277V / TRIAC, ELV, 0-10V dimming)
SP5	SP2 = 2.5" thin profile canopy that attaches flush to a rigid ceiling (driver sold separately) Cable with modular connector (and optional wire harness) attaches to a remote driver
SP2	MPC = Multi-port connector attaches to any of BlackJack's Multi-Port canopies (canopy and driver sold separately) Cable with modular connector attaches to a driver inside a Multi-Port canopy (driver may be remote)
MPC	JTA = Adapter connects the pendant in any position along the JackTrack system (track and driver sold separately) Cable is cut to length and inserted in a connector at the bottom of the JackTrack adapter
JTA	






















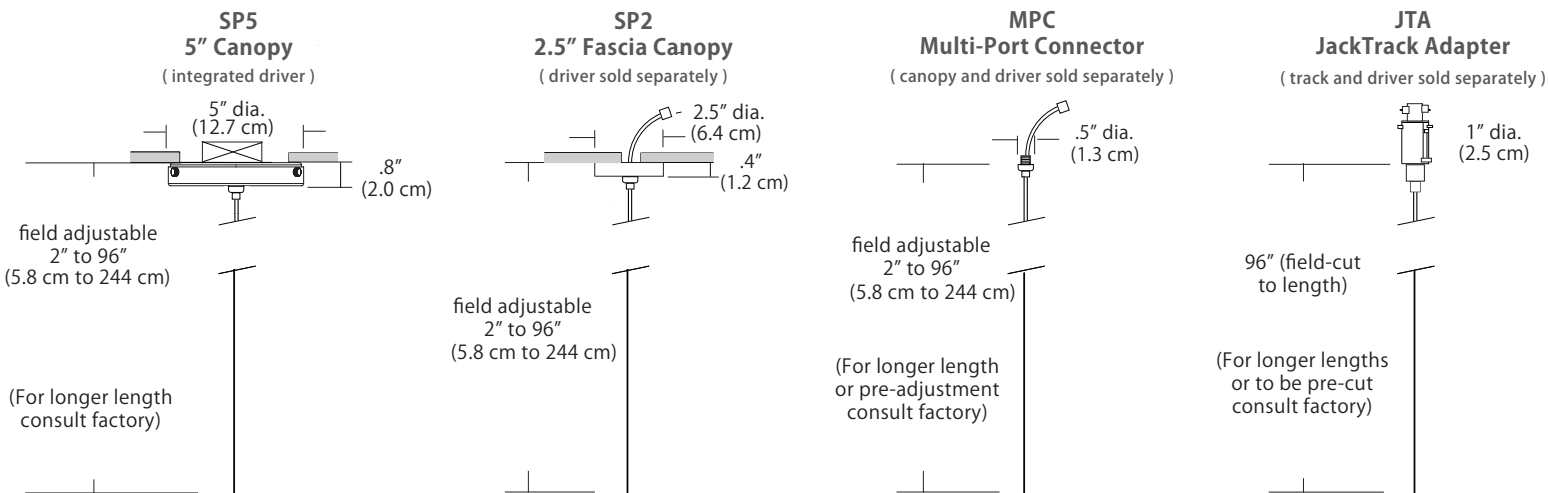


Max Cable Length

Length	
	96" (Standard) (Change Length for custom cable length, in inches)
96" (Standard)	Factory pre-configuration of cable length is available. Consult factory for details.
Custom	

For full specifications and ordering information, see blackjacklighting.com

(# symbol indicates additional specification required)

Pendant Mounting	Canopy	Dimensions	End / Side View	Finish Options
SP5	5" Canopy Canopy and driver included with pendant		 (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
SP2	2.5" Fascia Canopy Canopy included with pendant. Driver sold separately.		 (Remote Driver required)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	24" Multi-Port Square - 9 Port C-MPS-2409-# 24" Multi-Port Square - 25 Port C-MPS-2425-#	 9 Port  25 Port	 (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	38" Multi-Port Rectangle - 10 Port C-MPT-3810-# 38" Multi-Port Rectangle - 18 Port C-MPT-3818-#	 10 Port  18 Port	 (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	22" Multi-Port Linear - 5 Port C-MPL-2205-# 48" Multi-Port Linear - 11 Port C-MPL-4811-#	 5 Port  11 Port	 (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	10" Round - 3 Port C-MPR-1003-# 10" Round - 9 Port C-MPR-1009-#	 3 Port  9 Port	 (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	20" Round - 3 Port C-MPR-2003-# 20" Round - 12 Port C-MPR-2012-#	 3 Port  12 Port	 (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
JTA	24" JackTrack See Spec Sheet for details 48" JackTrack See Spec Sheet for details 94" JackTrack See Spec Sheet for details	  	 (Integrated or Remote Driver)	BL Matte Black WH White


System	Pendant Mounting	Configuration Examples	Finish Options
--------	------------------	------------------------	----------------

Quatro


4S (4' 2x2 / 9 Port)
MSQ-2409-#-#-4S-#-#

MPC

Square Configurations - See [Quatro Square Configurations](#) section of our website for specification information (#)




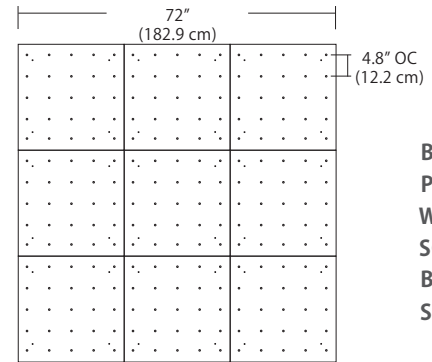6S (6' 3x3 / 25 Port)
MSQ-2425-#-#-6S-#-#




BL Matte Black
PC Pol. Chrome
WH White
SG Satin Gold
BZ Bronze
SS Satin Silver

Linear Configurations - See [Quatro Linear Configurations](#) section of our website for specification information (#)



4L (4'x2' / 9 Port)
MSQ-2409-#-#-4L-#-#

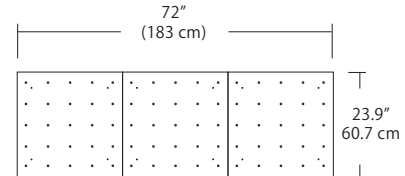6L (6'x2' / 25 Port)
MSQ-2425-#-#-6L-#-#




Duo


6L (6'4"x6" / 10 Port)
MSD-3810-#-#-6L-#-#

MPC

Linear Configurations - See [Duo Linear Configurations](#) section of our website for specification information (#)





9L (9'6"x6" / 18 Port)
MSD-3818-#-#-9L-#-#



BL Matte Black
PC Pol. Chrome
WH White
SG Satin Gold
BZ Bronze
SS Satin Silver


Solo

Solo 48" Linear Configuration - See [Solo Linear Configuration](#) section of our website for specific information (#)




Solo 22" Grid Configuration - See [Solo Grid Configuration](#) section of our website for specific information (#)

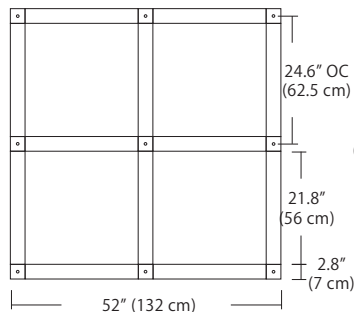MPC



Solo 48" Grid Configuration

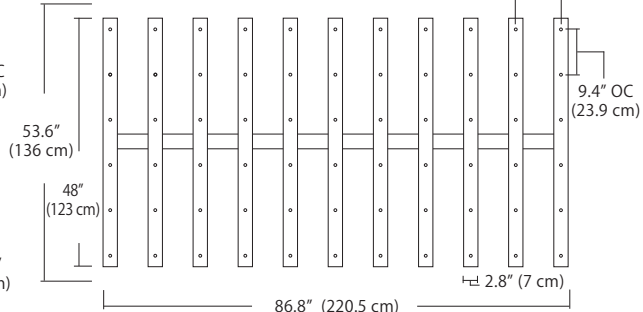

BL Matte Black
PC Pol. Chrome
WH White
SG Satin Gold
BZ Bronze
SS Satin Silver