

Project:

Note:

Type:

Quantity:

Model#: LIN - 14S - _____ - _____ - _____ - SO - _____

Description

A tubular frosted glass diffuser paired with a stamped steel back plate. The Lino Sconce adds contemporary styling to any space.

Features

- Stamped Steel construction
- Frosted glass tube diffuser
- Driver located behind back plate
- Damp location rated
- JA8-2016 Listed




Specifications (Standard)

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K (standard)
- Input Voltage: 120VAC 50/60Hz
- Lamping: 11W
- Lumens: 568lm (Lumens measured in 3000K)
- Fixture Weight: 1.9 lb. (.88 kg)
- Dimming: TRIAC dimmable
- For recommended dimmers see <https://www.blackjacklighting.com/dimming-information>

Options

- Upgradable to 120-277V input driver with Universal Dimming (Only available with S4 - 4.6" Shallow backplate or DB - Deep backplate)
- Standard Finish : SN - Satin Nickel
- Special Order Powder Coat Finishes: BL - Matte Black , BZ - Bronze or SG - Satin Gold
- Color Temperature: 2700K, 3000K, 3500K or 4000K.
- Backplate: S4 - 4.6" Shallow backplate, DB - Deep backplate or S3 - 3.9" Shallow Backplate (120V driver only)

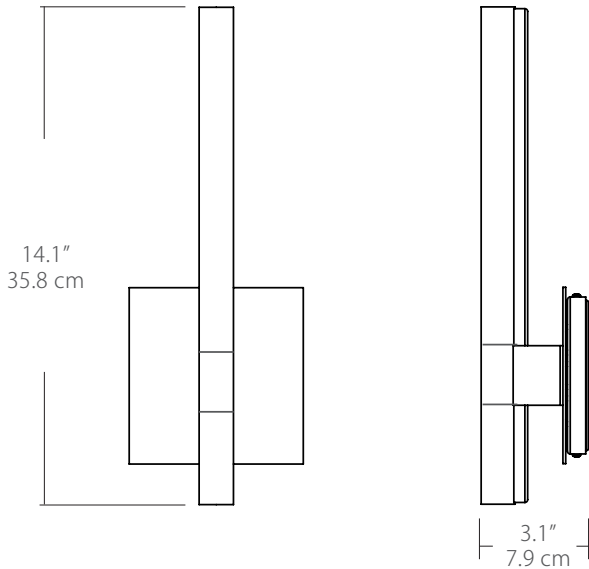

(Shown above with Standard S4 Backplate)



Shown Above:
LIN-14S-SN-12T-30K-SO-S4



ORDERING GUIDE

Family	Size	Finish	Volts/Dimming	Color Temp.	Output	Backplate
LIN	14S			30K	SO	
LIN Lino	14S 14" Sconce	SN Satin Nickel BL Matte Black BZ Bronze SG Satin Gold	12T 120VAC TRIAC Dimming 27U 120-277VAC Universal Dimming (Only available with S4 and DB backplates)	27K 2700K 30K 3000K 35K 3500K 40K 4000K (30K Standard)	SO Standard Output	S4 4.6" Shallow Backplate (Driver located in junction box) DB Deep Backplate (Driver located inside backplate) S3 3.9" Shallow Backplate (Driver located inside switch box) (120V driver only)

Example: LIN-14S-BZ-12T-30K-SO-S3

Finishes

Finish				
SN	SN - Satin Nickel	BL - Matte Black	BZ - Bronze	SG - Satin Gold
BL	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="border-top: 1px solid black; width: 100%;"></div> <div style="text-align: center;"> <p>Standard Finish</p> </div> <div style="text-align: center;"> <p>Special Order Powder Coat Finishes</p> </div> </div>			
BZ				
SG				

Volts/Dimming

Volts/Dimming	
12T	12T: Input: 120V , Dimming: TRIAC (Standard)
27U	27U: Input: 120-277V , Dimming: TRIAC/ ELV/ 0-10V (Special Order) (Only available with DB - Deep backplate or S4 - 4.6" Shallow backplate)

Color Temperature

Color Temp.	
27K	27K - 2700K
30K	30K - 3000K (Standard)
35K	35K - 3500K
40K	40K - 4000K

Backplates

Backplates			
S4	<p>S4 - Shallow 4.6" Backplate (4.6"H , 4.6"W , .5"D) Driver located inside j-box</p> <p>Standard Backplate</p>	<p>DB - Deep Backplate (4.6"H , 4.6"W , 1.3"D) Driver located inside backplate</p> <p>Special Order Backplate</p>	<p>S3 - 3.9" Shallow Backplate (4.6"H , 3.5"W , .5"D) Driver located inside j-box (This backplate requires a Narrow junction box with these approximate dimensions (4"H, 2.13"W,1.7"D))</p> <p>Special Order Backplate</p>