

Project:

Type:

Quantity:

Note:

SKU#: \_\_\_\_\_ -03P- \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_

## Description

The Globe pendant is a simple spherical form. Executed in optical acrylic, this pendant uses an integrated LED light source and has even light distribution in all directions

## Features


- Screw-in optical acrylic light guide
- Suspends from adjustable 144" cable
- Cutting and splicing are not required
- Excess cable stays coiled inside stamped steel canopy
- Driver located on top of canopy and mounts inside junction box.
- Damp location rated

## Specifications

- Color Rendering Index: 90CRI
  - LED Color Temperature: 3000K
  - Pendant width: 1.1" diameter 2" tall
  - Cable Length: 12'
  - Output: 170 Lumens
  - Watts: 3W
  - Available in two finishes: PC=polished chrome BL=black
  - Input Voltage: 120VAC 50/60Hz
  - Dimming: Phase dimming (TRIAC or ELV)
- For recommended dimmers and downloadable IES & LM 79 files, see [blackjacklighting.com](http://blackjacklighting.com)

## Custom

- Upgradable to 4000K/ 90CRI
- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)

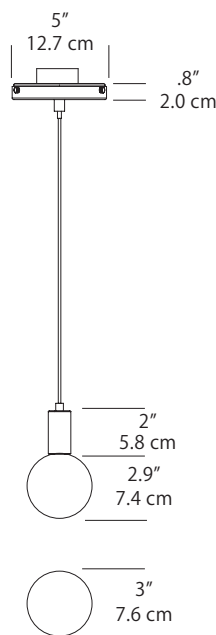

MGSB Bubble



MGSC Clear



MGSF Frosted

**CUTTING  
SPLICING  
NOT  
REQUIRED**



## ORDERING GUIDE

Family	Size/Type	Finish
<b>MGSB</b>	<b>03P</b>	
MGSB Bubble		BL Black
MGSC Clear		PC Polished Chrome
MGSF Frosted		

Example: MGSB-03P-PC-12P-30K

## CUSTOM OPTIONS

Volts/Dimming	Color Temp.
<b>12P</b>	<b>30K</b>
12P 120VAC, TRIAC or ELV Dimming	30K 3000K
27U 120-277VAC, Universal Dimming	40K 4000K
(12P Standard)	(30K Standard)