

Project:

Type:

Quantity:

Note:

SKU#: _____ -02P- _____ - _____ - _____

Description

The Novo Tall pendant is a simple geometric cylindrical form. Executed in aluminium, this pendant uses an integrated LED light source, and a frosted optical light guide for even light distribution in all directions.

Features


- Pendants come in two sizes and two exterior finishes
- Available with screw-in reflector or optical acrylic light guide diffusers
- Suspends from adjustable 144" cable
- Cutting and splicing are not required
- Excess cable winds up inside stamped steel canopy
- Driver located on top of canopy and mounts inside junction box.
- Damp location rated

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Pendant width: 1.5" diameter 3" tall
- Cable Length: 12'
- Output: 400 Lumens
- Watts: 5W
- Available in two finishes: PC=polished chrome BL=black
- Input Voltage: 120VAC 50/60Hz
- Dimming: Phase dimming (TRIAC or ELV)
- For recommended dimmers see Blackjacklighting.com

Custom

- Upgradable to 4000K/ 90CRI
- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)

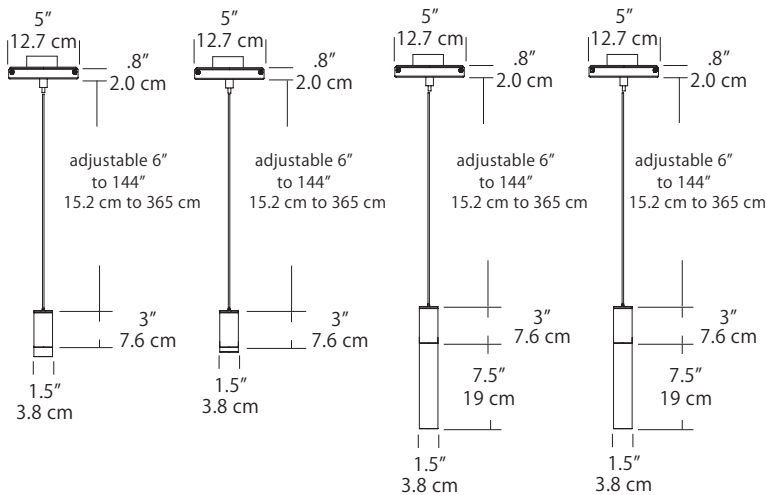

**CUTTING
SPLICING
NOT
REQUIRED**



ORDERING GUIDE

| Family | Size/Type | Finish |
|--------------------------|------------|--------------------------|
| <input type="checkbox"/> | 02P | <input type="checkbox"/> |
| MNSF Frosted | | BL Black |
| MNSB Bubble | | PC Polished Chrome |
| MNSL Luminous Ring | | |
| MNSR Reflector Ring | | |

Example: MNSR-02P-PC-12P-30K

CUSTOM OPTIONS

| Volts/Dimming | Color Temp. |
|-----------------------------------|--------------------------|
| <input type="checkbox"/> | <input type="checkbox"/> |
| 12P 120VAC, TRIAC or ELV Dimming | 30K 3000K |
| 27U 120-277VAC, Universal Dimming | 40K 4000K |
| (12P Standard) | (30K Standard) |