

Project:

Type:

Quantity:

Note:

SKU#: \_\_\_\_\_ -02P- \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_

## Description

The Novo Tall pendant is a simple geometric cylindrical form. Executed in aluminium, this pendant uses an integrated LED light source, and a frosted optical light guide for even light distribution in all directions.

## Features



- Pendants come in two sizes and two exterior finishes
- Available with screw-in reflector or optical acrylic light guide diffusers
- Suspends from adjustable 144" cable
- Cutting and splicing are not required
- Excess cable winds up inside stamped steel canopy
- Driver located on top of canopy and mounts inside junction box.
- Damp location rated

## Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Pendant width: 1.5" diameter 18" tall
- Cable Length: 12'
- Output: 400 Lumens
- Watts: 5W
- Available in two finishes: PC=polished chrome BL=black
- Input Voltage: 120VAC 50/60Hz
- Dimming: Phase dimming (TRIAC or ELV)
- For recommended dimmers see Blackjacklighting.com

## Custom

- Upgradable to 4000K/ 90CRI
- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)

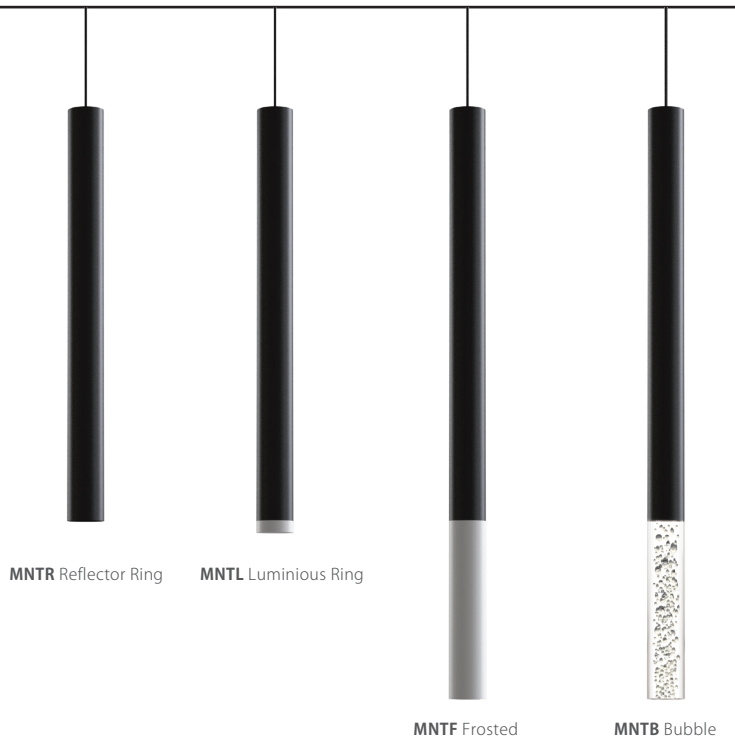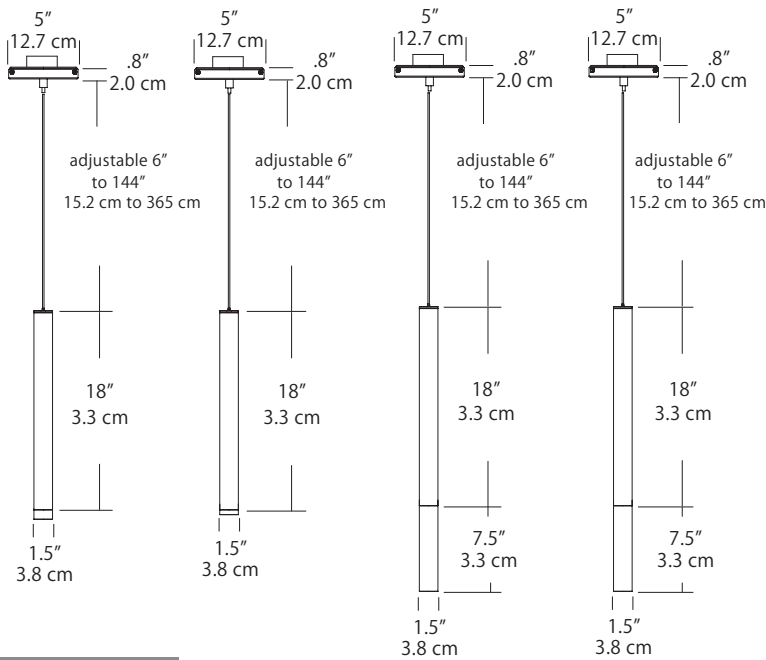

**CUTTING  
SPLICING  
NOT  
REQUIRED**



## ORDERING GUIDE

Family	Size/Type	Finish
MNTF	02P	
MNTF Frosted		BL Black
MNTB Bubble		PC Polished Chrome
MNTL Luminous Ring		
MNTR Reflector Ring		

Example: MNTR-02P-PC-12P-30K

## CUSTOM OPTIONS

Volts/Dimming	Color Temp.
12P	30K
12P 120VAC, TRIAC or ELV Dimming	30K 3000K
27U 120-277VAC, Universal Dimming	40K 4000K
(12P Standard)	(30K Standard)