

Project:

Type:

Quantity:

Note:

SKU#: \_\_\_\_\_ -12P- \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_

## Description

Our blown glass sphere pendants appear to be floating in air around a glowing cylinder of light. These pendants create an interesting volume to help fill a space and they are also light weight and translucent

## Features

- Available in three hand blown glass finishes
- Canopy with cable and socket are available in either Matte Black or Polished Chrome finishes
- Includes frosted acrylic light guide diffuser
- Suspends from adjustable 144" cable
- Cutting and splicing are not required
- Excess cable stays coiled inside stamped steel canopy
- Driver located on top of canopy and mounts inside junction box.
- Damp location rated


## Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K
- Cable Length: 12'
- Output: 400 Lumens
- Watts: 5W
- Available in two finishes: PC=polished chrome BL=black
- Input Voltage: 120VAC 50/60Hz
- Dimming: Phase dimming (TRIAC or ELV)

•For recommended dimmers see [Blackjacklighting.com](http://Blackjacklighting.com)

## Custom

- Upgradable to 4000K/ 90CRI
- Upgradable to Universal Driver (120-277V input with TRIAC/ ELV/ 0-10v dimming)

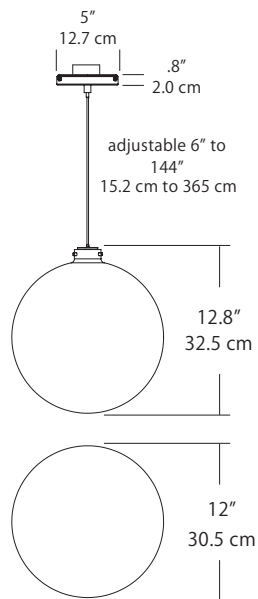

MSLC Clear Glass



MSLF White Frosted



MSLS Smoked Glass

**CUTTING  
SPLICING  
REQUIRED**



## ORDERING GUIDE

Family	Size/Type	Finish
MSLC Clear Glass	12P	BL Black
MSLF White Frosted		PC Polished Chrome
MSLS Smoked Glass		

Example: MNSR-02P-PC-12P-30K

## CUSTOM OPTIONS

Volts/Dimming	Color Temp.
12P	30K
12P 120VAC, TRIAC or ELV Dimming	30K 3000K
27U 120-277VAC, Universal Dimming	40K 4000K
(12P Standard)	(30K Standard)