

Project:

Note:

Type:

Quantity:

Model#: MLO - 14S - - - - - SO - - - - -

Description

A tubular frosted acrylic diffuser paired with a stamped steel backplate adds contemporary styling to any space.

Features

- Stamped Steel construction
- Frosted acrylic tube diffuser
- Driver located in junction box
- Damp location rated
- JA8-2016 Listed

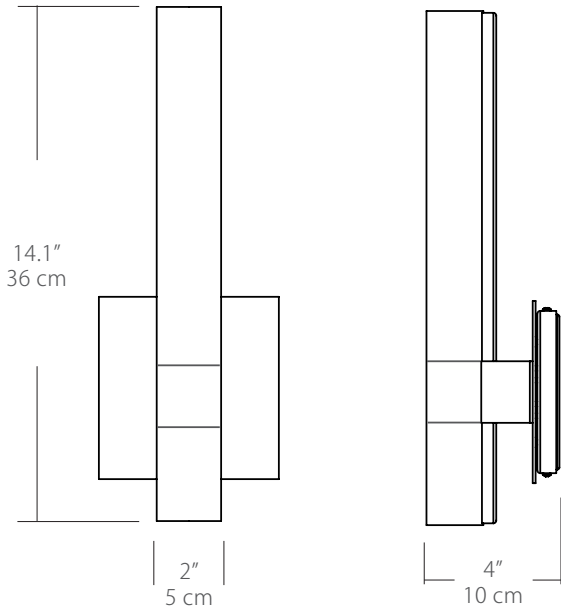


Specifications (Standard)

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K (standard)
- Input Voltage: 120VAC 50/60Hz
- Lamping: 13W
- Lumens: 625 lm (Lumens measured in 3000K)
- Fixture Weight: 1.9 lb. (.88 kg)
- Dimming: TRIAC dimmable
- For recommended dimmers see <https://www.blackjacklighting.com/dimming-information>

Options

- Upgradable to 120-277V input driver with Universal Dimming (Only available with S4 - 4.6" Shallow backplate or DB - Deep backplate)
- Standard Finish: SN - Satin Nickel
- Special Order Powder Coat Finishes: BL - Matte Black, BZ - Bronze or SG - Satin Gold
- Color Temperature: 2700K, 3000K, 3500K or 4000K
- Backplate: S4 - 4.6" Shallow backplate, DB - Deep backplate or S3 - 3.7" Shallow Backplate (120V driver only)



(Shown above with Standard S4 Backplate)



Shown Above:

MLO-14S-SN-12T-30K-SO-S4







ORDERING GUIDE

| Family | Size | Finish | Volts/Dimming | Color Temp. | Output | Backplate |
|----------|----------------|------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MLO | 14S | | | 30K | | |
| MLO Milo | 14S 14" Sconce | Standard SN Satin Nickel Special Order BL Matte Black BZ Bronze SG Satin Gold | 12T 120VAC TRIAC Dimming 27U 120-277VAC Universal Dimming (Only available with S4 and DB backplates) | 27K 2700K 30K 3000K 35K 3500K 40K 4000K (30K Standard) | SO Standard Output | S4 4.6" Shallow Backplate (Driver located inside junction box) DB Deep Backplate (Driver located in backplate) S3 3.9" Shallow Backplate (Driver located in switch box) (120V Driver only) |

Example: MLO-14S-BZ-12T-30K-SO-DB

Finishes

| | | | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|
| <p>Finish</p> <div style="background-color: white; width: 50px; height: 20px; margin: 5px;"></div> <p>SN</p> <p>BL</p> <p>BZ</p> <p>SG</p> |  SN - Satin Nickel |  BL - Matte Black |  BZ - Bronze |  SG - Satin Gold |
| | <p>Standard Finish</p> | | <p>Special Order Powder Coat Finishes</p> | |




Volts/Dimming

| | |
|----------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Volts/Dimming</p> <div style="background-color: white; width: 50px; height: 20px; margin: 5px;"></div> <p>12T</p> <p>27U</p> | <p>12T: Input: 120V , Dimming: TRIAC (Standard)</p> <p>27U: Input: 120-277V , Dimming: TRIAC/ ELV/ 0-10V (Special Order) (Only available with DB - Deep backplate or S4 - 4.6" Shallow backplate)</p> |
|----------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Color Temperature

| | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| <p>Color Temp.</p> <div style="background-color: white; width: 50px; height: 20px; margin: 5px;"></div> <p>27K</p> <p>30K</p> <p>35K</p> <p>40K</p> | <p>27K - 2700K</p> <p>30K - 3000K (Standard)</p> <p>35K - 3500K</p> <p>40K - 4000K</p> |
|------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|

Backplates

| | | | |
|---------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Backplates</p> <div style="background-color: white; width: 50px; height: 20px; margin: 5px;"></div> <p>S4</p> <p>DB</p> <p>S3</p> |  <p>S4 - Shallow 4.6" Backplate (4.6"H, 4.6"W, .5"D) Driver located inside j-box</p> <p>Standard Backplate</p> |  <p>DB - Deep Backplate (4.6"H, 4.6"W, 1.3"D) Driver located inside backplate</p> <p>Special Order Backplate</p> |  <p>S3 - 3.9" Shallow Backplate (4.6"H, 3.5"W, .5"D) Driver located inside j-box (This backplate requires a Narrow junction box with these approximate dimensions (4"H, 2.13"W, 1.7"D))</p> <p>Special Order Backplate</p> |
|---------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|