

Project:

Type:

Quantity:

Note:

SKU#: MLO - 48V - - - 30K - DB

Description

A tubular frosted acrylic diffuser paired with a stamped steel backplate adds contemporary styling to any space.

Features

- Stamped Steel construction
- Standard Finish: SN - Satin Nickel
- Frosted acrylic tube diffuser
- Driver located in backplate of fixture
- Damp location rated
- JA8-2016 Listed




Specifications

- Color Rendering Index: 90 CRI
- LED Color Temperature: 3000K (standard)
- Fixture Wattage: 25W
- Input Voltage: 120 VAC 50/60Hz
- Lumens: 1780 Lm (measured at 3000K)
- Fixture Weight: 5.4 lb. (2.5 kg)
- Deep Backplate (standard): 12.25" x 4.5" x 1.5"
- Dimming: TRIAC dimmable
- For recommended dimmers, see <http://www.blackjacklighting.com>

Options


- Upgradeable to 120-277V input driver with Universal Dimming
- Available in 2700K, 3000K, 3500K, and 4000K Color Temperatures
- Special Order Paint Finishes: BZ - Bronze, SG - Satin Gold or BL - Matte Black

Dimensions

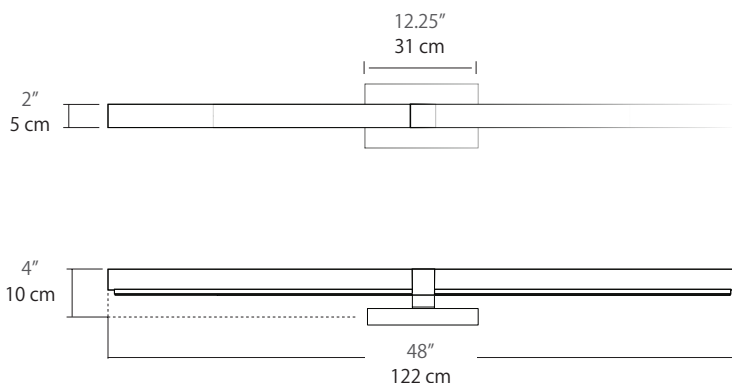

(Shown above with standard 12" x 4.6" x 1.5 backplate)

Fixture

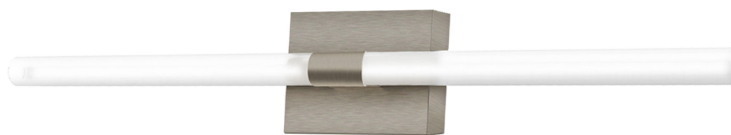

MLO-48V-SN-12T-30K-DB

ORDERING GUIDE

Family	Size	Finish	Volts/Dimming	Color Temp.	Backplate
MLO	48V			30K	DB
MLO Milo	48V 48" Vanity	Standard SN Satin Nickel Special Order BL Matte Black BZ Bronze SG Satin Gold	12T 120VAC TRIAC Dimming 27U 120-277VAC Universal Dimming (12T Standard)	27K 2700K 30K 3000K 35K 3500K 40K 4000K (30K Standard)	DB Deep Backplate (Standard) (Driver located in backplate) (DB Standard)

Example: MLO-48V-SN-12T-30K-DB

Finishes

Finish				
				
SN	SN - Satin Nickel	BL - Matte Black	BZ - Bronze	SG - Satin Gold
BL				
BZ				
SG				
	Standard Finish	Special Order Powder Coat Finishes		



Volts/Dimming

Volts/Dimming	
	12T: Input: 120V , Dimming: TRIAC (Standard)
12T	
27U	27U: Input: 120-277V , Dimming: TRIAC/ ELV/ 0-10V (Special Order)

Color Temperature

Color Temp.	
	27K - 2700K
27K	
30K	30K - 3000K (Standard)
35K	35K - 3500K
40K	40K - 4000K

Backplates

Backplates		
		
DB		
DB		
	Deep Backplate (Standard) Backplate (12" H, 4.6" W, 1.3" D) - Driver located inside backplate 	Front Plate 