

Project:

Type:

Quantity:

Note:

SKU#: PBX - 10P - \_\_\_ - \_\_\_ - \_\_\_

## Description

Classic tapered form with playful additions of color and scale. Quality illumination delivered via screw-in bulb or integrated, highly-efficient LEDs. Fixture provides optional universal voltage input and universal dimming.

## Features


- Available in in four exterior finish options, each with complimentary interior finishes
- Available standard with E26 socket (lamp not provided)
- Suspends 72" from the ceiling with a black power cord (white shade comes with white cord)
- Optional integrated LED light kit with glass diffuser comes with a 12' black power cord.
- Spun aluminum construction with a powder coated paint finish
- Damp location rated

## Specifications

- Color Rendering Index: 90 CRI for all light kit options
- LED color temperature: 3000K for all light kit options
- Input Voltage: 120 VAC 50/60Hz (120V- 277VAC for integrated LED light kit options only)
- Wattage: 16w
- Delivered lumens: 900lm
- Dimming: No dimming options for 12E light source. Integrated LED light kit upgrade features universal dimming (TRIAC/ ELV/ 0-10V)
- Fixture weight: 2.9 lb. (1.3 kg)
- For recommended dimmers and downloadable IES & LM 79 files, see [blackjacklighting.com](http://blackjacklighting.com)

## Custom

- Upgradable to integrated LED light kit; includes 120-277VAC driver with universal dimming (TRIAC/ ELV/0-10V)
- Integrated LED light kit (comes standard in 3000K) upgradable to 4000K 90CRI color temperature

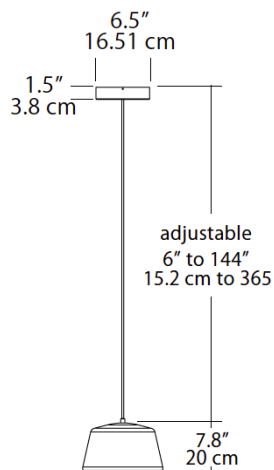

## ORDERING GUIDE

Family	Size/Type	Finish
<b>PBX</b>	<b>10P</b>	
	10P 10" Pendant	<b>BG</b> Black w/ Gold Interior <b>SW</b> Satin Nickel w/ White interior <b>WG</b> White w/ Gold Interior <b>RW</b> Brass w/ Off White interior

**Example:** PBX-10P-WG-12E-NAK

## CUSTOM OPTIONS

Volts/Dimming	Color Temp.
<b>12E</b>	<b>NAK</b>
<b>12E</b> 120VAC, E26 screw-in socket <b>27U</b> 120-277VAC, Universal Dimming (12E Standard)	<b>NAK</b> Color temp. option not available with 12E <b>30K</b> 3000K (Standard with Integrated LED light kit) <b>40K</b> 4000K (NAK Standard)