

Project:

Type:

Quantity:

Note:

SKU#:   PBX   -   20P   -      -      -     

## Description

Classic tapered form with playful additions of color and scale. Quality illumination delivered via screw-in bulb or integrated, highly-efficient LEDs. Fixture provides optional universal voltage input and universal dimming.

## Features


- Available in in two exterior finish options, each with complimentary interior finishes
- Available standard with E26 socket (lamp not provided)
- Suspends 72" from the ceiling with a black power cord
- Optional integrated LED light kit with glass diffuser comes with a 12' black power cord and aircraft suspension cable
- Spun aluminum construction with a powder coated paint finish
- Damp location rated

## Specifications

- Color Rendering Index: 90 CRI for all light kit options
- LED color temperature: 3000K for all light kit options
- Input Voltage: 120 VAC 50/60Hz (120V- 277VAC for integrated LED light kit options only)
- Wattage: 23w
- Delivered lumens: 1800lm
- Dimming: No dimming options for 12E light source. Integrated LED light kit upgrade features universal dimming (TRIAC/ ELV/ 0-10V)
- Fixture weight: 4.2 lb. (1.9 kg)
- For recommended dimmers and downloadable IES & LM 79 files, see [blackjacklighting.com](http://blackjacklighting.com)

## Custom

- Upgradable to integrated LED light kit; includes 120-277VAC driver with universal Dimming (TRIAC/ ELV/0-10V)
- Integrated LED light kit (comes standard in 3000K) upgradable to 4000K 90CRI color temperature

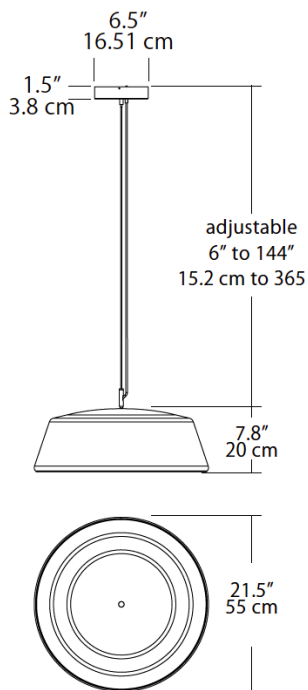

## ORDERING GUIDE

Family	Size/Type	Finish
<b>PBX</b>	<b>20P</b>	
	20P 20" Pendant	BG Black w/ Gold Interior SW Satin Nickel w/ White interior

Example: PBX-20P-SW-12E-NAK

## CUSTOM OPTIONS

Volts/Dimming	Color Temp.
<b>12E</b>	<b>NAK</b>
<b>12E</b> 120VAC, E26 screw-in socket	<b>NAK</b> Color temp. option not available with 12E
<b>27U</b> 120-277VAC, Universal Dimming	<b>30K</b> 3000K (Standard with Integrated LED light kit)
(12E Standard)	<b>40K</b> 4000K (NAK Standard)