

Project:

Note:

Type:

Quantity:

Model#: SP - PBX - FR - 10 - - - 12W - -

Description

Classic tapered form with playful additions of color and scale. Quality illumination delivered via integrated highly-efficient LEDs.

Features

- Suspends from an 8' adjustable cable
- Integrated LED light kit with glass diffuser comes with a 12' black power cord. (White shade comes with a white cord)
- Spun aluminum construction with a powder coated paint finish
- Damp location rated

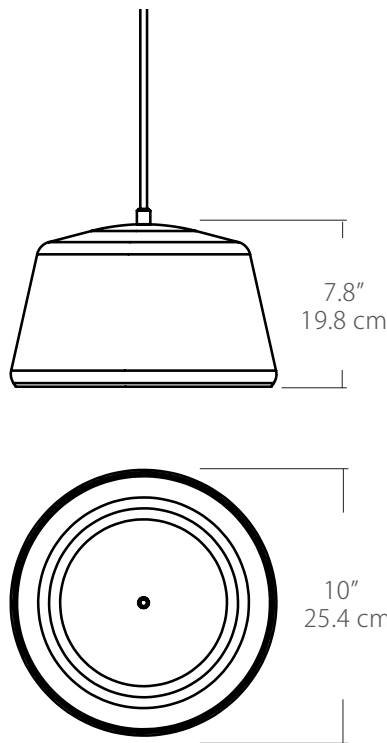
Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K (standard)
- Lumens: 12W / 700 Lumens (Gold Interior), 12W / 800 Lumens (White Interior)
- Lamping: 12W
- Cable Length: 8' (see page 2 for detail), for longer lengths consult factory
- Fixture Weight: 2.9 lb. (1.3 kg)
- For recommended dimmers see <https://www.blackjacklighting.com/dimming-information>


Options

- Color Temperature: 2700K, 3000K, 3500K, 4000K
- Available in: WG-White w/ Gold Interior, BG-Black w/ Gold Interior, BW - Black w/ White Interior, RW-Brass w/ White Interior or SW-Satin Nickel w/ White Interior
- Mounting: See page 2 for mounting options

Dimensions



Finishes



ORDERING GUIDE

Category	Series	Diffuser	Size	Finish	Color Temp.	Wattage	Mounting	Length
SP	PBX	FR	10		30K	12W		
SP Small Pendant	PBX Pillbox	FR Frosted diffuser w/ integrated light kit	10 10" Diameter	WG White w/ Gold Interior BG Black w/ Gold Interior BW Black w/ White Interior RW Brass w/ White Interior SW Satin Nickel w/ White Interior	27K 2700K 30K 3000K 35K 3500K 40K 4000K	12W 12Watts/ 700Lm Gold Interior 800Lm White Interior	SP5 5" Canopy SP2 2.5" Fascia Canopy MPC Multi-Port Connector JTA JackTrack Adapter	BLANK (Leave blank for standard 96" cable length) ### for cable length longer than 96" specify cable length in inches
					(30K Standard)	(See page 2 for mounting information)		

Example: SP-PBX-FR-10-SW-30K-12W-SP2-

Finish


<p>Finish</p> <div style="border: 1px solid black; width: 40px; height: 20px; margin: 5px 0;"></div> <p>WG BG BW RW SW</p>	 WG = White w/ Gold Interior	 BG = Black w/ Gold Interior	 BW = Black w/ White Interior	 RW = Brass w/ White Interior	 SW = Satin Nickel w/ White Interior
---	---	---	--	--	---

Wattage

<p>Wattage</p> <div style="border: 1px solid black; width: 40px; height: 20px; margin: 5px 0;"></div> <p>12W</p>	<p>12W = 12 Watts / 700 Lumens (Gold Interior), 12W / 800 Lumens (White Interior)</p> <p>(Lumens measured at 3000K)</p>
---	--

Mounting

<p>Mounting</p> <div style="border: 1px solid black; width: 40px; height: 20px; margin: 5px 0;"></div> <p>SP5 SP2 MPC JTA</p>	<p>SP5 = 5" canopy with integrated driver (included), attaches to rear of canopy and sits inside ceiling mounted junction box <i>Cable with modular connector attaches to canopy w/ integrated universal driver (120-277V / TRIAC, ELV, 0-10V dimming)</i></p> <p>SP2 = 2.5" thin profile canopy that attaches flush to a rigid ceiling (driver sold separately) <i>Cable with modular connector (and optional wire harness) attaches to a remote driver</i></p> <p>MPC = Multi-port connector attaches to any of BlackJack's Multi-Port canopies (canopy and driver sold separately) <i>Cable with modular connector attaches to a driver inside a Multi-Port canopy (driver may be remote)</i></p> <p>JTA = Adapter connects the pendant in any position along the JackTrack system (track and driver sold separately) <i>Cable is cut to length and inserted in a connector at the bottom of the JackTrack adapter</i></p>
--	---


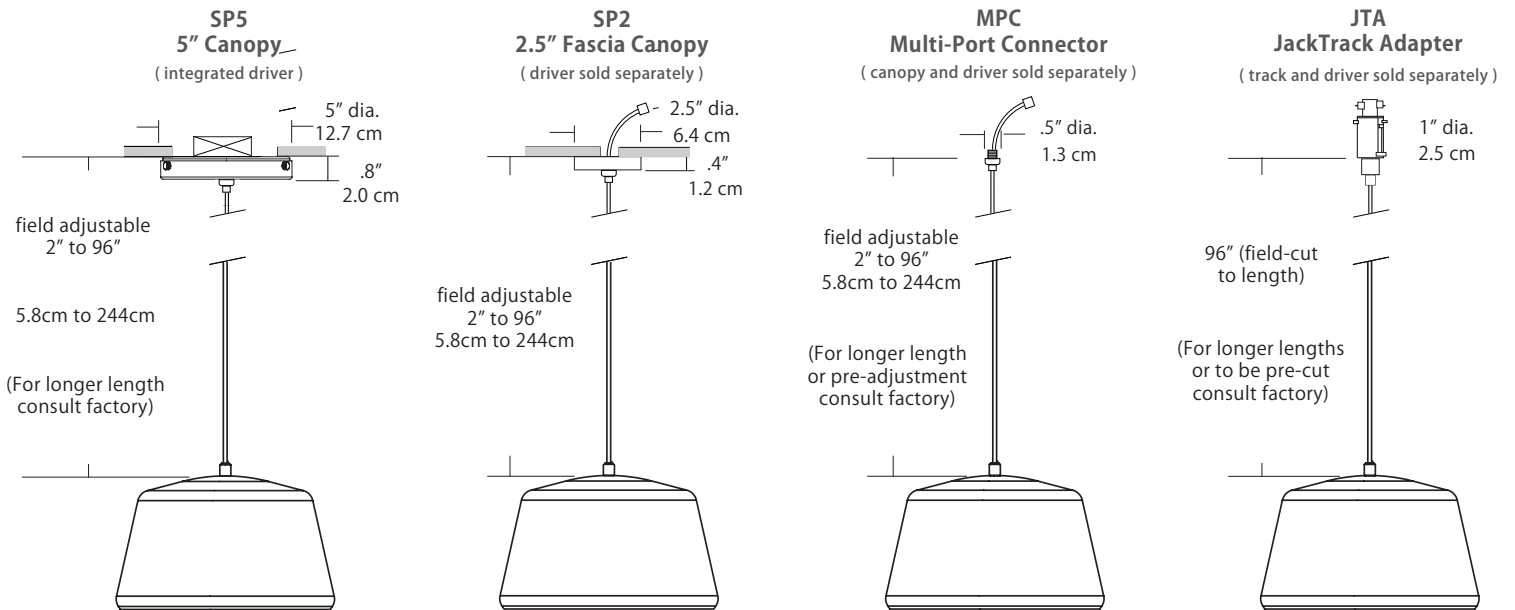
















Max Cable Length

<p>Length</p> <div style="border: 1px solid black; width: 40px; height: 20px; margin: 5px 0;"></div> <p>BLANK ###</p>	<p>BLANK = Leave blank for standard 96" cable length.</p> <p>### = Specify maximum cable length needed for fixture (in inches).</p> <p>Factory pre-configuration of cable length is available. Consult factory for details.</p>
--	---

For full specifications and ordering information see blackjacklighting.com

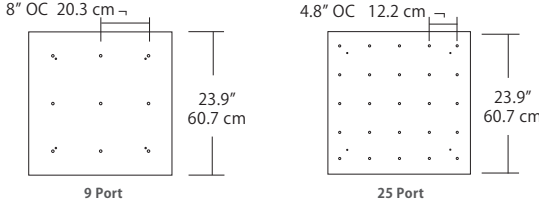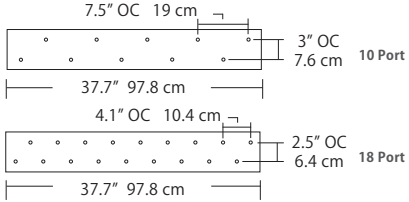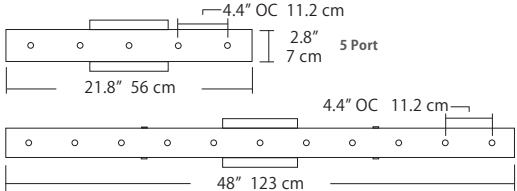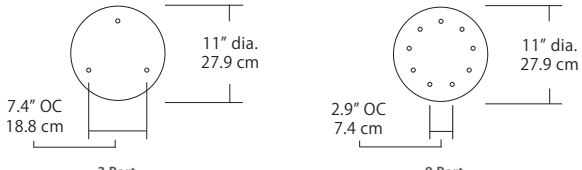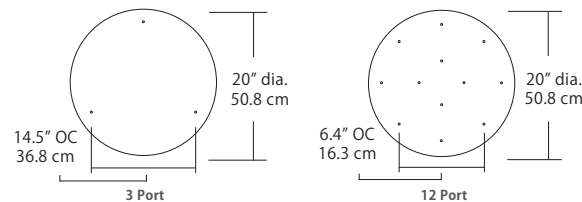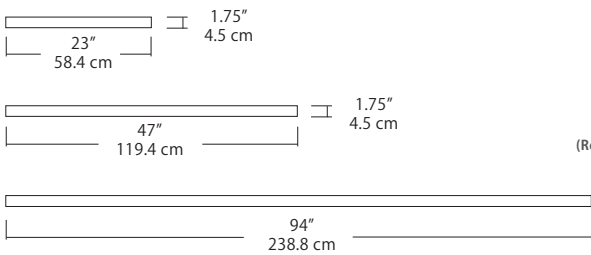(# symbol indicates additional specification required)

Pendant Mounting	Canopy	Dimensions	End / Side View	Finish Options
SP5	5" Canopy Canopy and driver included with pendant	 5" dia. 12.7 cm	 (Integrated Driver) .8" / 2 cm	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
SP2	2.5" Fascia Canopy Canopy included with pendant. Driver sold separately.	 2.5" dia. 6.4 cm	 (Remote Driver) .4" / 1.3 cm	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	24" Multi-Port Square - 9 Port C-MPS-2409-# 24" Multi-Port Square - 25 Port C-MPS-2425-#	 8" OC 20.3 cm 23.9" 60.7 cm 4.8" OC 12.2 cm 23.9" 60.7 cm 9 Port 25 Port	 21.5" 54.6 cm 2.5" 6 cm (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	38" Multi-Port Rectangle - 10 Port C-MPT-3810-# 38" Multi-Port Rectangle - 18 Port C-MPT-3818-#	 7.5" OC 19 cm 37.7" 97.8 cm 3" OC 7.6 cm 10 Port 4.1" OC 10.4 cm 2.5" OC 6.4 cm 18 Port 37.7" 97.8 cm	 4.7" 11.9 cm 2.5" 6 cm 6" 15.2 cm (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	22" Multi-Port Linear - 5 Port C-MPL-2205-# 48" Multi-Port Linear - 11 Port C-MPL-4811-#	 4.4" OC 11.2 cm 21.8" 56 cm 2.8" 7 cm 5 Port 4.4" OC 11.2 cm 48" 123 cm 2.8" 7 cm 11 Port	 2.8" 7 cm 1.4" 4 cm (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	10" Round - 3 Port C-MPR-1003-# 10" Round - 9 Port C-MPR-1009-#	 7.4" OC 18.8 cm 11" dia. 27.9 cm 3 Port 2.9" OC 7.4 cm 11" dia. 27.9 cm 9 Port	 10" dia. 25.4 cm 2.1" 5.3 cm (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	20" Round - 3 Port C-MPR-2003-# 20" Round - 12 Port C-MPR-2012-#	 14.5" OC 36.8 cm 20" dia. 50.8 cm 3 Port 6.4" OC 16.3 cm 20" dia. 50.8 cm 12 Port	 18" dia. 45.7 cm 2.5" 6 cm (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
JTA	24" JackTrack #-#-# 48" JackTrack #-#-# 94" JackTrack #-#-#	 23" 58.4 cm 1.75" 4.5 cm 47" 119.4 cm 1.75" 4.5 cm 94" 238.8 cm 1.75" 4.5 cm	 1.38" 3.5 cm 1.75" 4.5 cm (Remote Driver)	BL Matte Black WH White

For more information see www.Blackjacklighting.com

(# symbol indicates additional specification required)


System	Pendant Mounting	Configuration Examples	Finish Options
--------	------------------	------------------------	----------------

Quatro


4S (4' 2x2 / 9 Port)
MSQ-2409-##-4S-##

MPC

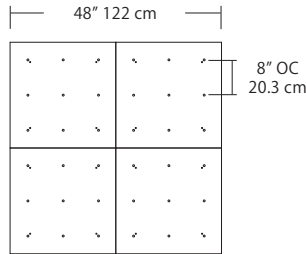Square Configurations - See [Quatro Square Configurations](#) section of our website for specification information (#)




6S (6' 3x3 / 25 Port)
MSQ-2425-##-6S-##

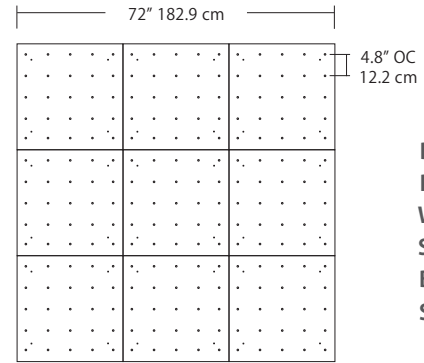


- BL** Matte Black
- PC** Pol. Chrome
- WH** White
- SG** Satin Gold
- BZ** Bronze
- SS** Satin Silver

4L (4'x2' / 9 Port)
MSQ-2409-##-4L-##

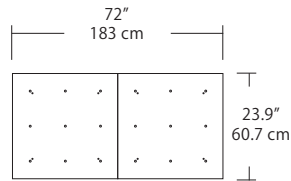Linear Configurations - See [Quatro Linear Configurations](#) section of our website for specification information (#)



6L (6'x2' / 25 Port)
MSQ-2425-##-6L-##


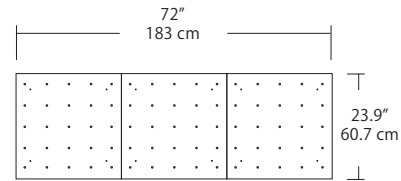


Duo

6L (6'4"x6" / 10 Port)
MSD-3810-##-6L-##

MPC

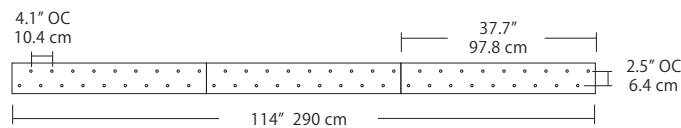
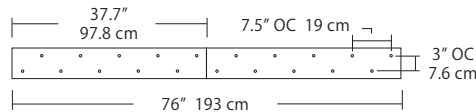
Linear Configurations - See [Duo Linear Configurations](#) section of our website for specification information (#)



- BL** Matte Black
- PC** Pol. Chrome
- WH** White
- SG** Satin Gold
- BZ** Bronze
- SS** Satin Silver


Solo

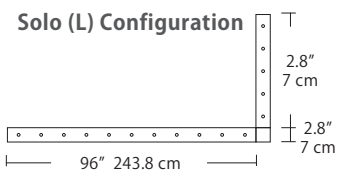Solo 48" Linear Configuration - See [Solo Linear Configuration](#) section of our website for specific information (#)




Solo 22" Grid Configuration - See [Solo Grid Configuration](#) section of our website for specific information (#)

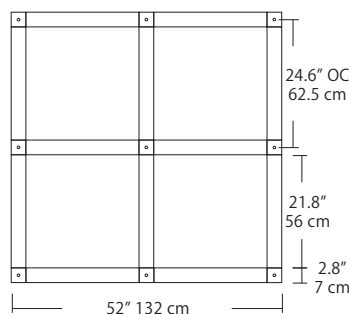MPC



Solo 48" Grid Configuration

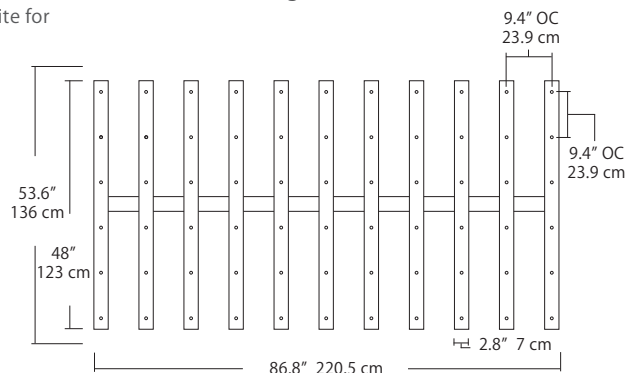

- BL** Matte Black
- PC** Pol. Chrome
- WH** White
- SG** Satin Gold
- BZ** Bronze
- SS** Satin Silver