

Project:

Note:

Type:

Quantity:

Model#: SP - PBX - FR - 20 - - - 23W - SP5 -

Description

Classic tapered form with playful additions of color and scale. Quality illumination delivered via integrated highly-efficient LEDs.

Features

- Suspends from an 8' adjustable cable
- Integrated LED light kit with glass diffuser comes with a 12' black power cord. (White shade comes with a white cord)
- Spun aluminum construction with a powder coated paint finish
- Damp location rated


Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K (standard)
- Lumens: 23W / 1800 Lumens
- Lamping: 23W
- Cable Length: 8' (see page 2 for detail), for longer lengths consult factory
- Fixture Weight: 4.2 lb (1.9kg)
- For recommended dimmers see <https://www.blackjacklighting.com/dimming-information>

Options

- Color Temperature: 2700K, 3000K, 3500K, 4000K
- Available in: BG - Black w/ Gold Interior or SW - Satin Nickel w/ White Interior
- Mounting: See page 2 for mounting options

Dimensions

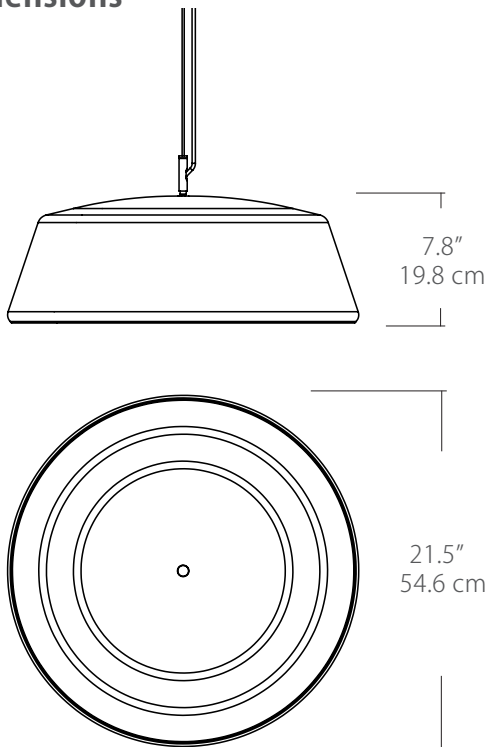

Finishes



BG - Black w/
Gold Interior



SW - Satin Nickel w/
White Interior





ORDERING GUIDE

Category	Series	Diffuser	Size	Finish	Color Temp.	Wattage	Mounting	Length
SP	PBX	FR	20		30K	23W	SP5	
SP Small Pendant	PBX Pillbox	FR Frosted diffuser w/ integrated light kit	20 20" Diameter	BG Black w/ Gold Interior SW Satin Nickel w/ White Interior	27K 2700K 30K 3000K 35K 3500K 40K 4000K	23W 23Watts/ 1800Lm	SP5 5" Canopy	BLANK (Leave blank for standard 96" cable length) ### for cable length longer than 96" specify cable length in inches
					(30K Standard)	(See page 2 for mounting information)		

Example: SP-PBX-FR-20-SW-30K-23W-SP5-

Finish



<p>Finish</p> <div style="border: 1px solid black; width: 40px; height: 20px; margin: 5px 0;"></div> <p>BG SW</p>	 <p>BG - Black with Gold Interior</p>	 <p>SW - Satin Nickel with White Interior</p>
--	--	--


Wattage

<p>Wattage</p> <div style="border: 1px solid black; width: 40px; height: 20px; margin: 5px 0;"></div> <p>23W</p>	<p>23W = 23 Watts / 1800 Lumens</p> <p>(Lumens measured at 3000K)</p>
---	---

Mounting

<p>Mounting</p> <div style="border: 1px solid black; width: 40px; height: 20px; margin: 5px 0;"></div> <p>SP5</p>	<p>SP5 = 5" canopy with integrated driver (included), attaches to rear of canopy and sits inside ceiling mounted junction box</p> <p><i>Cable with modular connector attaches to canopy w/ integrated universal driver (120-277V / TRIAC, ELV, 0-10V dimming)</i></p>
--	---

Pendant Mounting	Canopy	Dimensions	End/Side View	Finish Options
SP5	<p>5" Canopy</p> <p>Canopy and driver included with pendant</p>	 <p>5" dia. 12.7 cm</p>	 <p>.8" 2 cm</p> <p>(Integrated Driver)</p>	<p>BL Matte Black</p> <p>PC Pol. Chrome</p> <p>WH White</p> <p>SG Satin Gold</p> <p>BZ Bronze</p> <p>SS Satin Silver</p>

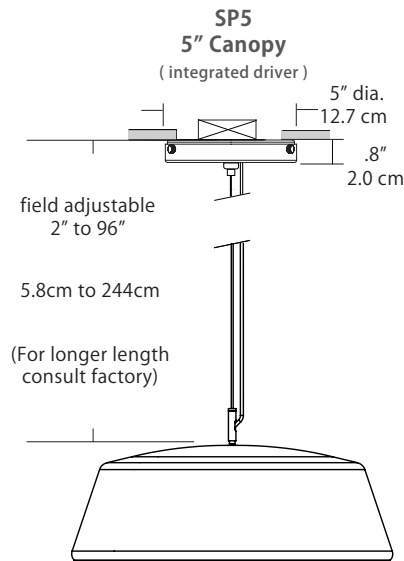

Max Cable Length

<p>Length</p> <div style="border: 1px solid black; width: 40px; height: 20px; margin: 5px 0;"></div> <p>BLANK ###</p>	<p>BLANK = Leave blank for standard 96" cable length.</p> <p>### = Specify maximum cable length needed for fixture (in inches).</p> <p>Factory pre-configuration of cable length is available. Consult factory for details.</p>
--	---