

Project: _____ Type: _____ Quantity: _____
Note: _____ SKU#: SP - FR - 20 - _____ - _____ - 23W - _____ - _____ - _____

Description

Classic tapered form with playful additions of color and scale. Quality illumination delivered via integrated highly-efficient LEDs.

Features

- Suspends from an 12' adjustable cable
- Integrated LED light kit with glass diffuser comes with a 12' black power cord.
- Spun aluminum construction with a powder coated paint finish
- Damp location rated



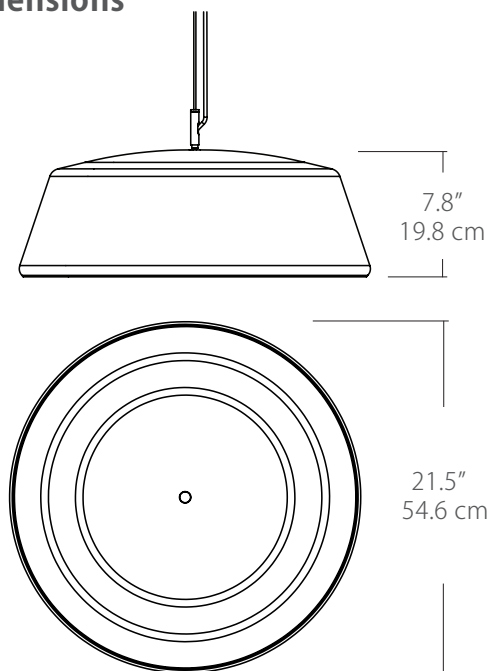
Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K (standard)
- Lumens: 2071 Lumens
- Fixture Wattage: 31W
- Cable Length: 12' (see page 2 for details; custom lengths available)
- Fixture Weight: 7.1 lb (3.22 kg)
- For recommended dimmers see <http://blackjacklighting.com>

Options

- Color Temperature: 2700K, 3000K, 3500K, 4000K
- Available in: BG - Black w/Gold Interior or SW - Satin Nickel w/White Interior
- Mounting: See page 2 for mounting options

Dimensions



Finishes



BG - Black w/
Gold Interior



SW - Satin Nickel w/
White Interior

ORDERING GUIDE

Category	Series	Diffuser	Size	Finish	Color Temp.	Wattage	Mounting	Length
SP	PBX	FR	20		30K	31W	SP5	144
SP Small Pendant	PBX Pillbox	FR Frosted diffuser w/ integrated light kit	20 20" Diameter	BG Black w/ Gold Interior SW Satin Nickel w/ White Interior	27K 2700K 30K 3000K 35K 3500K 40K 4000K	31W 31Watts/ 2071Lm	SP5 5" Canopy SP2 2.5" Fascia Canopy MPC Multi-Port Connector JTA JackTrack Adapter	144" (Standard) (Change Length for custom cable length, in inches)
Example: SP-PBX-FR-20-SW-30K-23W-SP5-144					(30K Standard)		(See page 2 for mounting information)	

Finish


Finish		
		
BG SW	BG - Black with Gold Interior	SW - Satin Nickel with White Interior

Wattage

Wattage	
	23W = 23 Watts / 1800 Lumens <i>(Lumens measured at 3000K)</i>
23W	

Mounting

Mounting	
	SP5 = 5" canopy with integrated driver (included), attaches to rear of canopy and sits inside ceiling mounted junction box <i>Cable with modular connector attaches to canopy w/ integrated universal driver (120-277V / TRIAC, ELV, 0-10V dimming)</i> SP2 = 2.5" thin profile canopy that attaches flush to a rigid ceiling (driver sold separately) <i>Cable with modular connector (and optional wire harness) attaches to a remote driver</i> MPC = Multi-port connector attaches to any of BlackJack's Multi-Port canopies (canopy and driver sold separately) <i>Cable with modular connector attaches to a driver inside a Multi-Port canopy (driver may be remote)</i> JTA = Adapter connects the pendant in any position along the JackTrack system (track and driver sold separately) <i>Cable is cut to length and inserted in a connector at the bottom of the JackTrack adapter</i>
SP5	
SP2	
MPC	
JTA	





















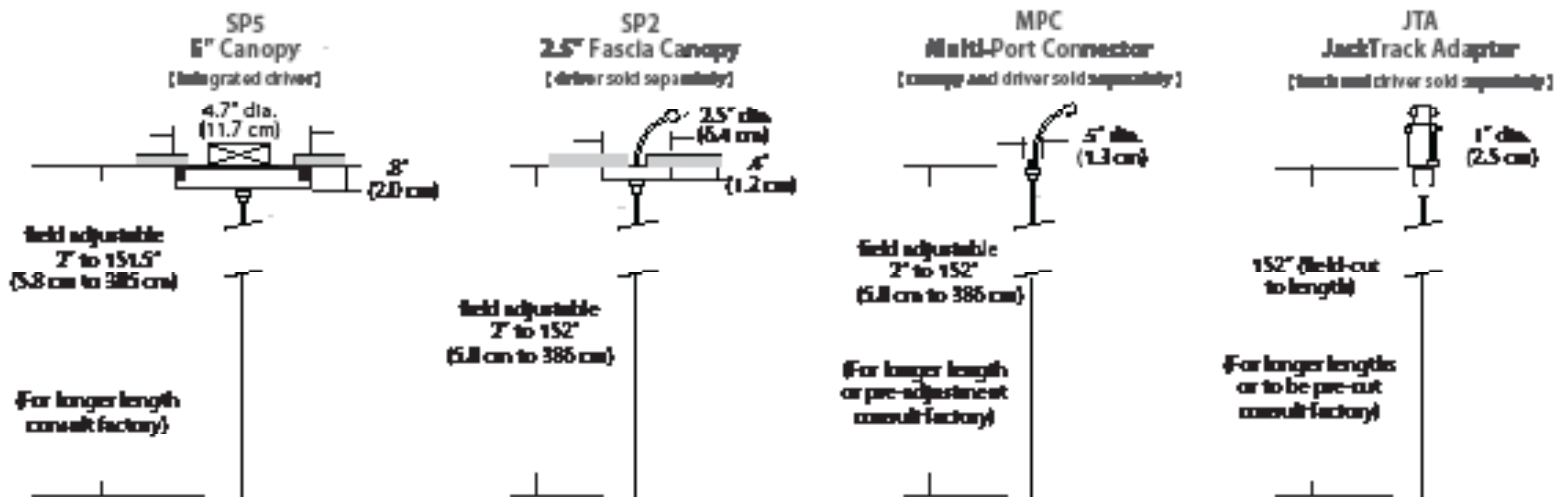


Max Cable Length

Length	
	144" (Standard) (Change Length for custom cable length, in inches)
144" (Standard)	
Custom Length	Factory pre-configuration of cable length is available. Consult factory for details.

For full specifications and ordering information, see blackjacklighting.com

(# symbol indicates additional specification required)


Pendant Mounting	Canopy	Dimensions	End / Side View	Finish Options
SP5	5" Canopy Canopy and driver included with pendant		 (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
SP2	2.5" Fascia Canopy Canopy included with pendant. Driver sold separately.		 (Remote Driver required)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	24" Multi-Port Square - 9 Port C-MPS-2409-# 24" Multi-Port Square - 25 Port C-MPS-2425-#	 9 Port  25 Port	 (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	38" Multi-Port Rectangle - 10 Port C-MPT-3810-# 38" Multi-Port Rectangle - 18 Port C-MPT-3818-#	 10 Port  18 Port	 (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	22" Multi-Port Linear - 5 Port C-MPL-2205-# 48" Multi-Port Linear - 11 Port C-MPL-4811-#	 5 Port  11 Port	 (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	10" Round - 3 Port C-MPR-1003-# 10" Round - 9 Port C-MPR-1009-#	 3 Port  9 Port	 (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	20" Round - 3 Port C-MPR-2003-# 20" Round - 12 Port C-MPR-2012-#	 3 Port  12 Port	 (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
JTA	24" JackTrack See JackTrack Spec Sheet 48" JackTrack See JackTrack Spec Sheet 94" JackTrack See JackTrack Spec Sheet	 23" 58.4 cm  47" 119.4 cm  94" 238.8 cm	 (Integrated or Remote Driver)	BL Matte Black WH White

System	Pendant Mounting	Configuration Examples	Finish Options
--------	------------------	------------------------	----------------


Quatro

Square Configurations - See [Quatro Square Configurations](#) section of our website for specification information (#)

4S (4' 2x2 / 9 Port)
MSQ-2409-#-#-4S-#-#



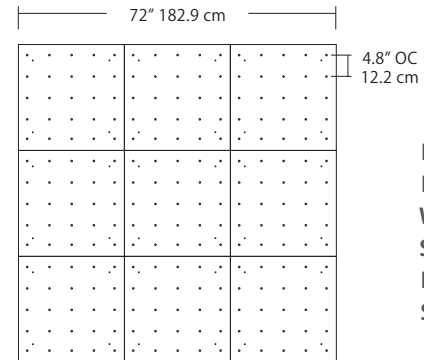6S (6' 3x3 / 25 Port)
MSQ-2425-#-#-6S-#-#




BL Matte Black
PC Pol. Chrome
WH White
SG Satin Gold
BZ Bronze
SS Satin Silver


MPC

Linear Configurations - See [Quatro Linear Configurations](#) section of our website for specification information (#)

4L (4' x2' / 9 Port)
MSQ-2409-#-#-4L-#-#



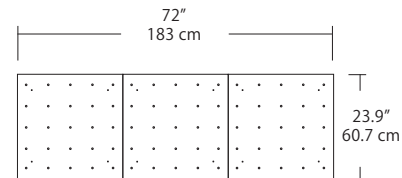
6L (6' x2' / 25 Port)
MSQ-2425-#-#-6L-#-#



Duo

Linear Configurations - See [Duo Linear Configurations](#) section of our website for specification information (#)


6L (6' 4"x6" / 10 Port)
MSD-3810-#-#-6L-#-#



BL Matte Black
PC Pol. Chrome
WH White
SG Satin Gold
BZ Bronze
SS Satin Silver



MPC

9L (9' 6"x6" / 18 Port)
MSD-3818-#-#-9L-#-#



Solo



Solo 48" Linear Configuration - See [Solo Linear Configuration](#) section of our website for specific information (#)



Solo 22" Grid Configuration - See [Solo Grid Configuration](#) section of our website for specific information (#)

Solo 48" Grid Configuration

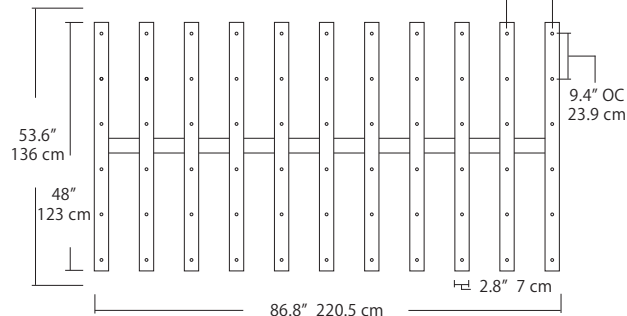MPC



BL Matte Black
PC Pol. Chrome
WH White
SG Satin Gold
BZ Bronze
SS Satin Silver