

Project:

Note:

Type:

Quantity:

Model#: SP - VEL - - 05 - - - - -

Description

The Velo glass pendant is a simple geometric cylindrical form. Executed in clear or smoked blown glass, this pendant uses an integrated LED light source, and a screw-in optical light guide for even light distribution in all directions

Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K (standard)
- Cable Length: 8' (see page 2 for detail), for longer lengths consult factory
- Fixture Weight: 3 lb. (1.4 kg) (for 5" Canopy System)
- For recommended dimmers see <https://www.blackjacklighting.com/dimming-information>


Features

- Replaceable light source
- Acrylic light guide
- Blown glass diffuser

Options

- Color Temperature: 2700K, 3000K, 3500K, 4000K
- Blown Glass Diffuser: Clear or Smoke finish
- Standard Socket Finishes: BL - Matte Black, PC - Polished Chrome or WH - White
- Special Order Socket Powder Coat Finishes: BZ - Bronze, SG - Satin Gold or SS - Satin Silver
- Light Guide: Tall Clear, Filament or Bubble
- Lumens: 2W/ 90 Lumens or 3W/ 170 Lumens
- Lamping: 2W or 3W
- Mounting: See page 2 for mounting options

Dimensions

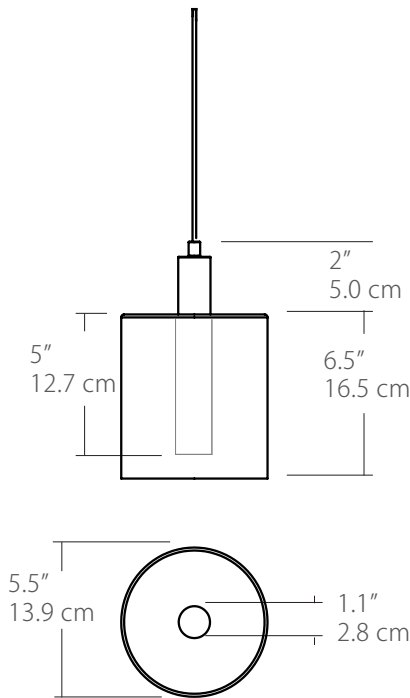

Diffusers

CC - Clear Diffuser w/ Tall Clear Light Guide



CF - Clear Diffuser w/ Filament Light Guide



CB - Clear Diffuser w/ Bubble Light Guide



SC - Smoked Diffuser w/ Clear Light Guide



SF - Smoked Diffuser w/ Filament Light Guide



SB - Smoked Diffuser w/ Bubble Light Guide



For canopy options see page 3.



ORDERING GUIDE

Category	Series	Diffuser	Size	Finish	Color Temp.	Wattage	Mounting	Length
SP	VEL		05		30K			
SP Small Pendant	VEL Velo	CB Clear Glass/ Bubble CF Clear Glass/ Filament CC Clear Glass/ Tall Clear SB Smoked Glass/ Bubble SF Smoked Glass/ Filament SC Smoked Glass/ Tall Clear	05 5" Diameter	BL Black PC Polished Chrome WH White BZ Bronze SG Satin Gold SS Satin Silver	27K 2700K 30K 3000K 35K 3500K 40K 4000K	2W 2Watts/ 90Lm 3W 3Watts/ 140Lm (recommended for single pendant application)	SP5 5" Canopy SP2 2.5" Fascia Canopy MPC Multi-Port Connector JTA JackTrack Adapter (See page 2 for mounting information)	BLANK (Leave blank for standard 96" cable length) ### for cable length longer than 96" specify cable length in inches

Example: SP-VEL-CF-05-BL-30K-2W-SP2-

(30K Standard)

Finish


<p>Finish</p> <div style="border: 1px solid black; width: 40px; height: 20px; margin: 0 auto;"></div> <p>PC BL WH BZ SG SS</p>	 <p>PC - Polished Chrome</p>	 <p>BL - Matte Black</p>	 <p>WH - White</p>	 <p>BZ - Bronze</p>	 <p>SG - Satin Gold</p>	 <p>SS - Satin Silver</p>
<p>Standard Finishes</p>				<p>Special Order Powder Coat Finishes</p>		

Wattage

<p>Wattage</p> <div style="border: 1px solid black; width: 40px; height: 20px; margin: 0 auto;"></div> <p>2W 3W</p>	<p>2W = 2 Watts / 90 Lumens, recommended for Multi-Port applications (Multi-Port system and JackTrack adapter).</p> <p>3W = 3 Watts / 140 Lumens, recommended for single pendant applications (5" Canopy and 2.5" Fascia Canopy).</p> <p>(Lumens measured at 3000K)</p>
--------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Mounting

<p>Mounting</p> <div style="border: 1px solid black; width: 40px; height: 20px; margin: 0 auto;"></div> <p>SP5 SP2 MPC JTA</p>	<p>SP5 = 5" canopy with integrated driver (included), attaches to rear of canopy and sits inside ceiling mounted junction box <i>Cable with modular connector attaches to canopy w/ integrated universal driver (120-277V / TRIAC, ELV, 0-10V dimming)</i></p> <p>SP2 = 2.5" thin profile canopy that attaches flush to a rigid ceiling (driver sold separately) <i>Cable with modular connector (and optional wire harness) attaches to a remote driver</i></p> <p>MPC = Multi-port connector attaches to any of BlackJack's Multi-Port canopies (canopy and driver sold separately) <i>Cable with modular connector attaches to a driver inside a Multi-Port canopy (driver may be remote)</i></p> <p>JTA = Adapter connects the pendant in any position along the JackTrack system (track and driver sold separately) <i>Cable is cut to length and inserted in a connector at the bottom of the JackTrack adapter</i></p>
---------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

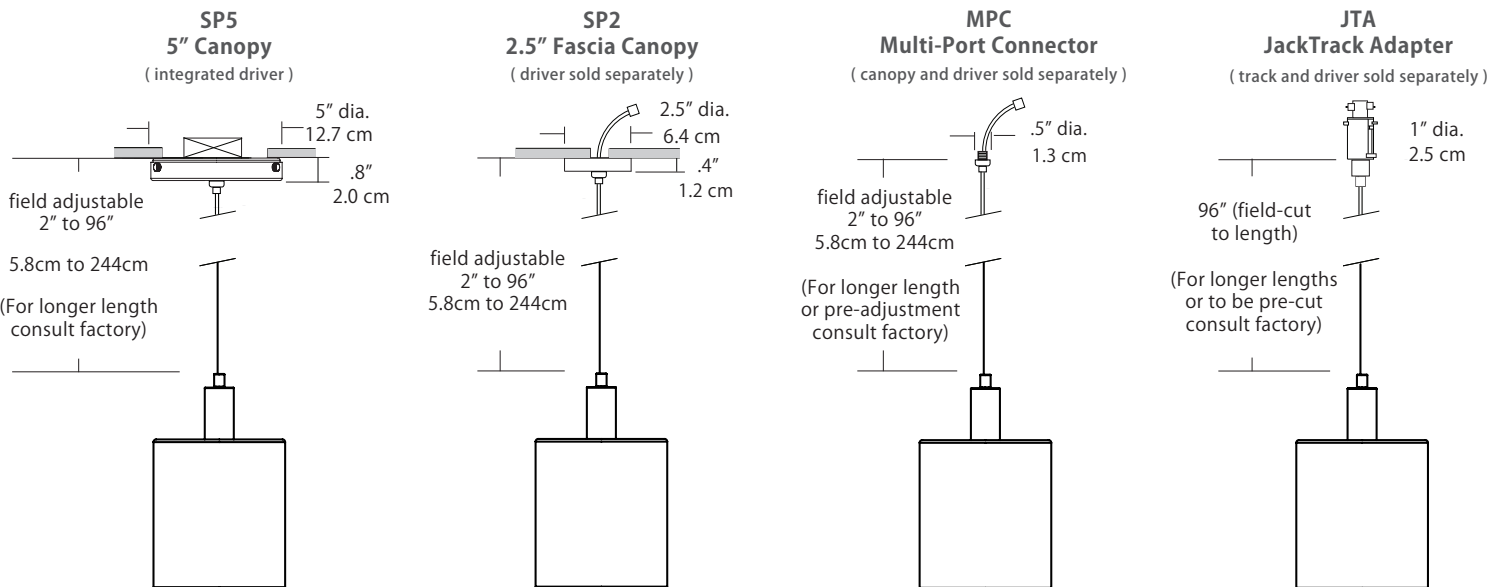



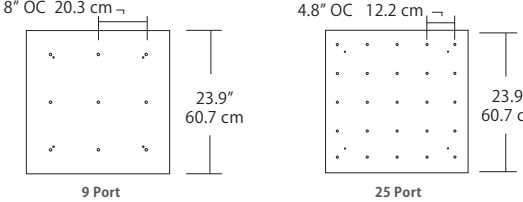

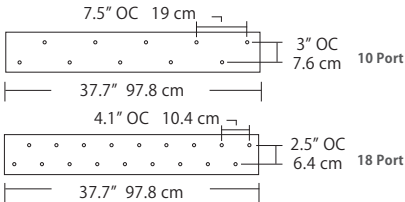

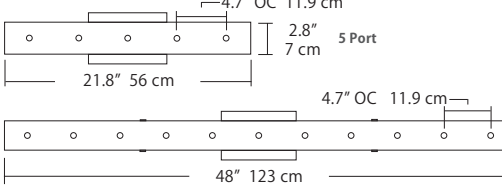

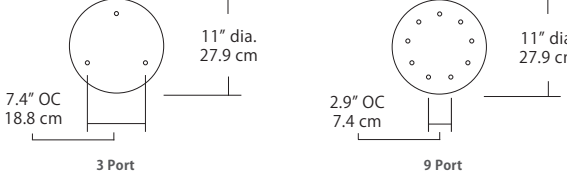

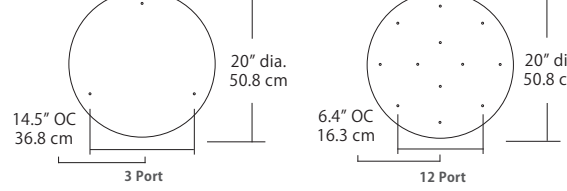

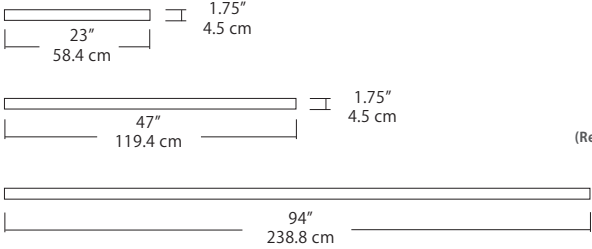



Max Cable Length

<p>Length</p> <div style="border: 1px solid black; width: 40px; height: 20px; margin: 0 auto;"></div> <p>BLANK ###</p>	<p>BLANK = Leave blank for standard 96" cable length.</p> <p>### = Specify maximum cable length needed for fixture (in inches).</p> <p>Factory pre-configuration of cable length is available. Consult factory for details.</p>
-----------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

For full specifications and ordering information see blackjacklighting.com

(# symbol indicates additional specification required)

Pendant Mounting	Canopy	Dimensions	End / Side View	Finish Options
SP5	5" Canopy Canopy and driver included with pendant	 5" dia. 12.7 cm	 (Integrated Driver) .8" / 2 cm	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
SP2	2.5" Fascia Canopy Canopy included with pendant. Driver sold separately.	 2.5" dia. 6.4 cm	 (Remote Driver) .4" / 1.3 cm	
MPC	24" Multi-Port Square - 9 Port C-MPS-2409-# 24" Multi-Port Square - 25 Port C-MPS-2425-#	 8" OC 20.3 cm 4.8" OC 12.2 cm 23.9" / 60.7 cm 9 Port 25 Port	 (Integrated or Remote Driver) 21.5" / 54.6 cm 2.5" / 6 cm	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	38" Multi-Port Rectangle - 10 Port C-MPT-3810-# 38" Multi-Port Rectangle - 18 Port C-MPT-3818-#	 7.5" OC 19 cm 3" OC 7.6 cm 10 Port 4.1" OC 10.4 cm 2.5" OC 6.4 cm 18 Port 37.7" / 97.8 cm	 (Integrated Driver) 4.7" / 11.9 cm 6" / 15.2 cm 2.5" / 6 cm	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	22" Multi-Port Linear - 5 Port C-MPL-2205-# 48" Multi-Port Linear - 11 Port C-MPL-4811-#	 4.7" OC 11.9 cm 2.8" / 7 cm 5 Port 21.8" / 56 cm 4.7" OC 11.9 cm 2.8" / 7 cm 11 Port 48" / 123 cm	 (Integrated or Remote Driver) 2.8" / 7 cm 1.4" / 4 cm	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	10" Round - 3 Port C-MPR-1003-# 10" Round - 9 Port C-MPR-1009-#	 11" dia. 27.9 cm 7.4" OC 18.8 cm 3 Port 2.9" OC 7.4 cm 9 Port	 (Integrated Driver) 10" dia. 25.4 cm 2.1" / 5.3 cm	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	20" Round - 3 Port C-MPR-2003-# 20" Round - 12 Port C-MPR-2012-#	 20" dia. 50.8 cm 14.5" OC 36.8 cm 3 Port 6.4" OC 16.3 cm 12 Port	 (Integrated Driver) 18" dia. 45.7 cm 2.5" / 6 cm	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
JTA	24" JackTrack #-#-# 48" JackTrack #-#-# 94" JackTrack #-#-#	 23" / 58.4 cm 1.75" / 4.5 cm 47" / 119.4 cm 1.75" / 4.5 cm 94" / 238.8 cm 1.75" / 4.5 cm	 (Remote Driver) 1.38" / 3.5 cm 1.75" / 4.5 cm	BL Matte Black WH White

For more information see www.Blackjacklighting.com

(# symbol indicates additional specification required)


System	Pendant Mounting	Configuration Examples	Finish Options
--------	------------------	------------------------	----------------

Quatro


4S (4' 2x2 / 9 Port)
MSQ-2409-##-4S-##

MPC

Square Configurations - See [Quatro Square Configurations](#) section of our website for specification information (#)

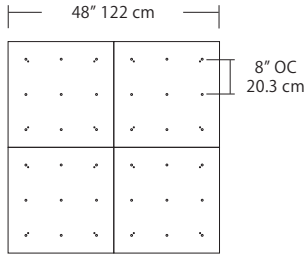


6S (6' 3x3 / 25 Port)
MSQ-2425-##-6S-##

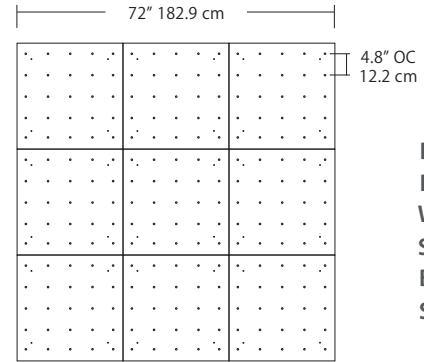


- BL** Matte Black
- PC** Pol. Chrome
- WH** White
- SG** Satin Gold
- BZ** Bronze
- SS** Satin Silver

4L (4'x2' / 9 Port)
MSQ-2409-##-4L-##

Linear Configurations - See [Quatro Linear Configurations](#) section of our website for specification information (#)

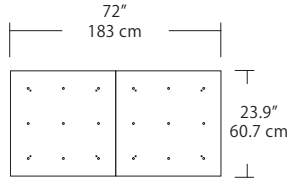

6L (6'x2' / 25 Port)
MSQ-2425-##-6L-##

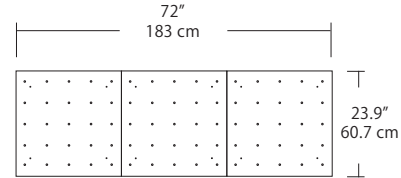


Duo

6L (6'4"x6" / 10 Port)
MSD-3810-##-6L-##


MPC

Linear Configurations - See [Duo Linear Configurations](#) section of our website for specification information (#)

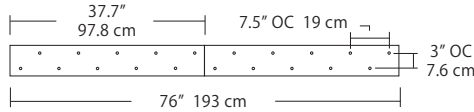



- BL** Matte Black
- PC** Pol. Chrome
- WH** White
- SG** Satin Gold
- BZ** Bronze
- SS** Satin Silver

9L (9'6"x6" / 18 Port)
MSD-3818-##-9L-##

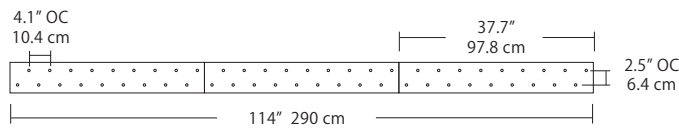

Solo



Solo 48" Linear Configuration - See [Solo Linear Configuration](#) section of our website for specific information (#)

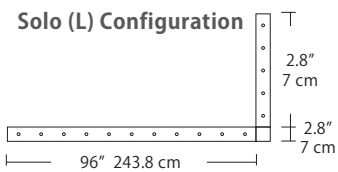

Solo 22" Grid Configuration - See [Solo Grid Configuration](#) section of our website for specific information (#)

MPC

Solo 48" Grid Configuration

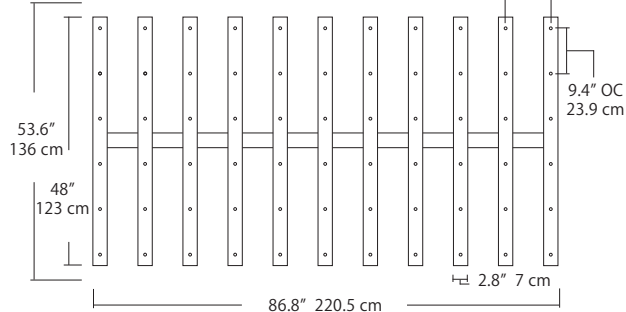

- BL** Matte Black
- PC** Pol. Chrome
- WH** White
- SG** Satin Gold
- BZ** Bronze
- SS** Satin Silver