

**Project:**

**Note:**

**Type:**

**Quantity:**

**Model#:** SP - VEL -      - 05 -      -      -      -      -     

**Description**

The Velo glass pendant is a simple geometric cylindrical form. Executed in clear or smoked blown glass, this pendant uses an integrated LED light source, and a screw-in optical light guide for even light distribution in all directions

**Specifications**

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K (standard)
- Cable Length: 8' (see page 2 for detail), for longer lengths consult factory
- Fixture Weight: 3 lb. (1.4 kg) (for 5" Canopy System)
- For recommended dimmers see <https://www.blackjacklighting.com/dimming-information>


**Features**

- Replaceable light source
- Acrylic light guide
- Blown glass diffuser

**Options**

- Color Temperature: 2700K, 3000K, 3500K, 4000K
- Blown Glass Diffuser: Clear or Smoke finish
- Standard Socket Finishes: BL - Matte Black, PC - Polished Chrome or WH - White
- Special Order Socket Powder Coat Finishes: BZ - Bronze, SG - Satin Gold or SS - Satin Silver
- Light Guide: Tall Clear, Filament or Bubble
- Lumens: 2W/ 90 Lumens or 3W/ 170 Lumens
- Lamping: 2W or 3W
- Mounting: See page 2 for mounting options

**Dimensions**

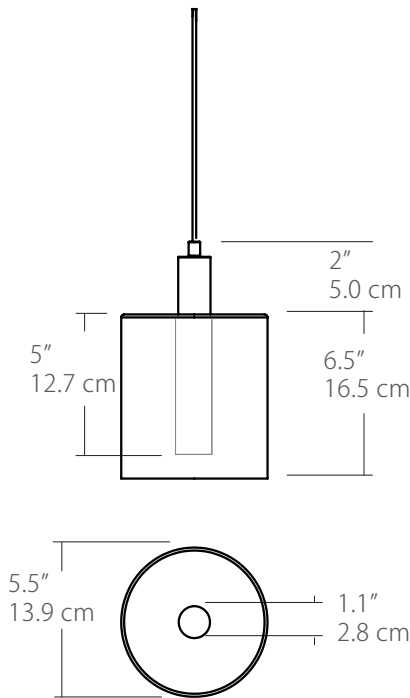

**Diffusers**

**CC** - Clear Diffuser w/ Tall Clear Light Guide



**CF** - Clear Diffuser w/ Filament Light Guide



**CB** - Clear Diffuser w/ Bubble Light Guide



**SC** - Smoked Diffuser w/ Clear Light Guide



**SF** - Smoked Diffuser w/ Filament Light Guide



**SB** - Smoked Diffuser w/ Bubble Light Guide



For canopy options see page 3.



**ORDERING GUIDE**

Category	Series	Diffuser	Size	Finish	Color Temp.	Wattage	Mounting	Length
<b>SP</b>	<b>VEL</b>		<b>05</b>		<b>30K</b>			
SP Small Pendant	VEL Velo	<b>CB</b> Clear Glass/ Bubble <b>CF</b> Clear Glass/ Filament <b>CC</b> Clear Glass/ Tall Clear <b>SB</b> Smoked Glass/ Bubble <b>SF</b> Smoked Glass/ Filament <b>SC</b> Smoked Glass/ Tall Clear	05 5" Diameter	<b>Standard</b> <b>BL</b> Black <b>PC</b> Polished Chrome <b>WH</b> White <b>Special Order</b> <b>BZ</b> Bronze <b>SG</b> Satin Gold <b>SS</b> Satin Silver	<b>27K</b> 2700K <b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K	<b>2W</b> 2Watts/ 90Lm <b>3W</b> 3Watts/ 140Lm (recommended for single pendant application)	<b>SP5</b> 5" Canopy <b>SP2</b> 2.5" Fascia Canopy <b>MPC</b> Multi-Port Connector <b>JTA</b> JackTrack Adapter	<b>BLANK</b> (Leave blank for standard 96" cable length) ### for cable length longer than 96" specify cable length in inches


(See page 2 for mounting information)

Example: SP-VEL-CF-05-BL-30K-2W-SP2-


**Finish**


<b>Finish</b>  PC BL WH BZ SG SS	 <b>PC - Polished Chrome</b>	 <b>BL - Matte Black</b>	 <b>WH - White</b>	 <b>BZ - Bronze</b>	 <b>SG - Satin Gold</b>	 <b>SS - Satin Silver</b>
<b>Standard Finishes</b>				<b>Special Order Powder Coat Finishes</b>		

**Wattage**


<b>Wattage</b>   2W 3W	<p><b>2W</b> = 2 Watts / 90 Lumens, recommended for Multi-Port applications (Multi-Port system and JackTrack adapter).</p> <p><b>3W</b> = 3 Watts / 140 Lumens, recommended for single pendant applications (5" Canopy and 2.5" Fascia Canopy).</p> <p>(Lumens measured at 3000K)</p>
---	---

**Mounting**

<b>Mounting</b>   SP5 SP2 MPC JTA	<p><b>SP5</b> = 5" canopy with integrated driver (included), attaches to rear of canopy and sits inside ceiling mounted junction box <i>Cable with modular connector attaches to canopy w/ integrated universal driver (120-277V / TRIAC, ELV, 0-10V dimming)</i></p> <p><b>SP2</b> = 2.5" thin profile canopy that attaches flush to a rigid ceiling (driver sold separately) <i>Cable with modular connector (and optional wire harness) attaches to a remote driver</i></p> <p><b>MPC</b> = Multi-port connector attaches to any of BlackJack's Multi-Port canopies (canopy and driver sold separately) <i>Cable with modular connector attaches to a driver inside a Multi-Port canopy (driver may be remote)</i></p> <p><b>JTA</b> = Adapter connects the pendant in any position along the JackTrack system (track and driver sold separately) <i>Cable is cut to length and inserted in a connector at the bottom of the JackTrack adapter</i></p>
--	---

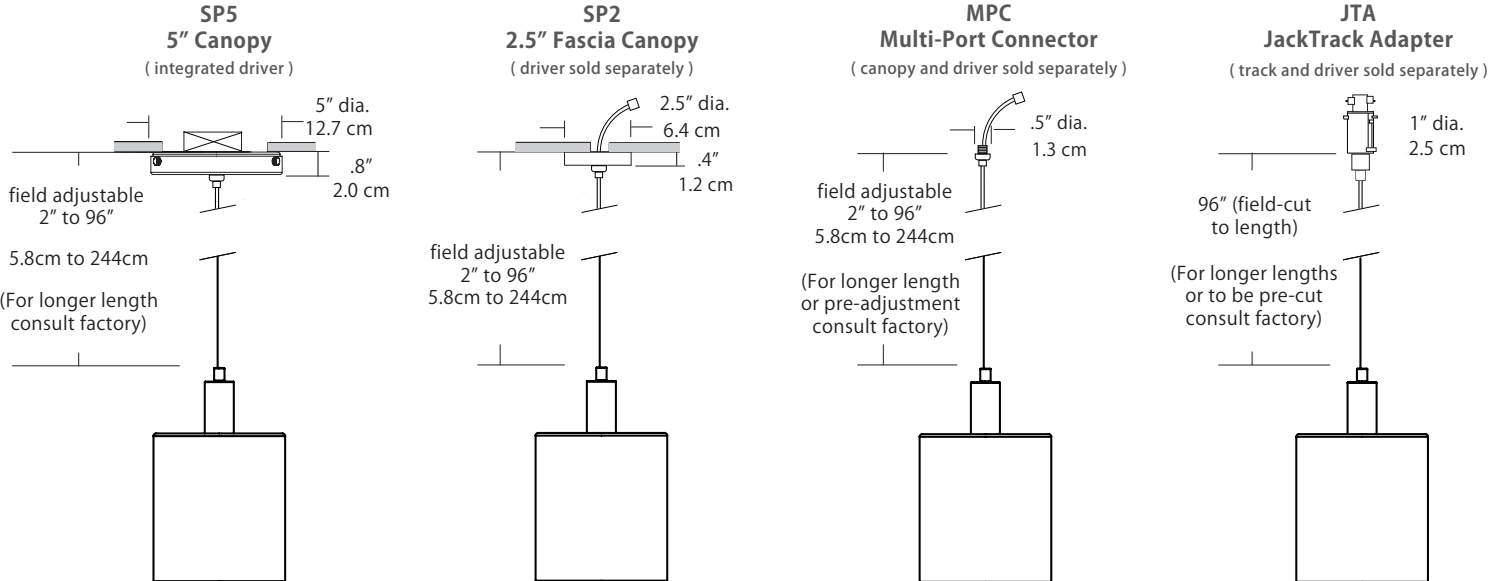



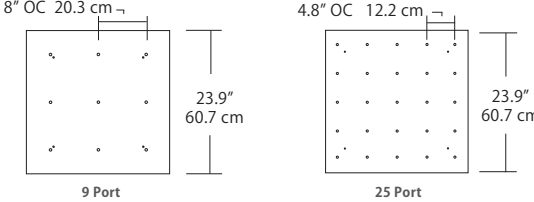

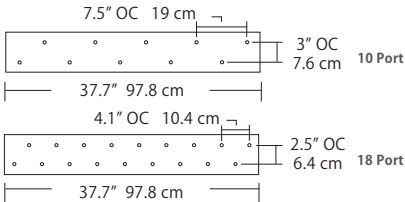

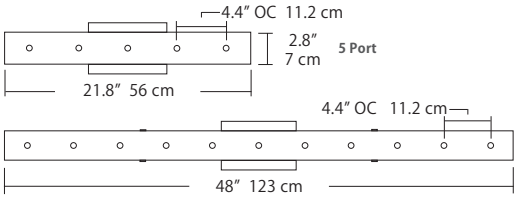

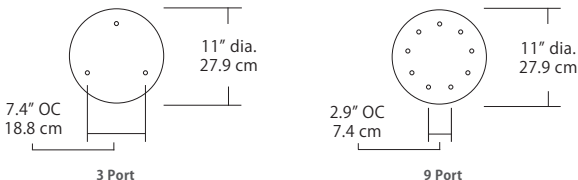

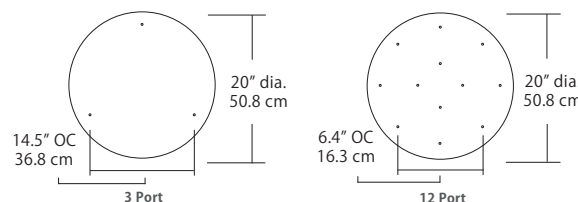

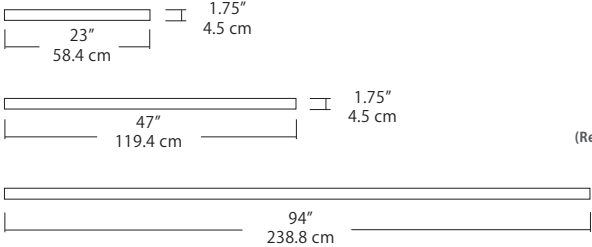



**Max Cable Length**

<b>Length</b>   BLANK ###	<p><b>BLANK</b> = Leave blank for standard 96" cable length.</p> <p><b>###</b> = Specify maximum cable length needed for fixture (in inches).</p> <p>Factory pre-configuration of cable length is available. Consult factory for details.</p>
--	---

For full specifications and ordering information see [blackjacklighting.com](http://blackjacklighting.com)

(# symbol indicates additional specification required)

Pendant Mounting	Canopy	Dimensions	End / Side View	Finish Options
SP5	<b>5" Canopy</b> Canopy and driver included with pendant	 5" dia. 12.7 cm	 (Integrated Driver) .8" / 2 cm	<b>BL</b> Matte Black <b>PC</b> Pol. Chrome <b>WH</b> White <b>SG</b> Satin Gold <b>BZ</b> Bronze <b>SS</b> Satin Silver
SP2	<b>2.5" Fascia Canopy</b> Canopy included with pendant. Driver sold separately.	 2.5" dia. 6.4 cm	 (Remote Driver) .4" / 1.3 cm	
MPC	<b>24" Multi-Port Square - 9 Port</b> C-MPS-2409-# <b>24" Multi-Port Square - 25 Port</b> C-MPS-2425-#	 8" OC 20.3 cm 4.8" OC 12.2 cm 23.9" / 60.7 cm 9 Port 25 Port	 21.5" / 54.6 cm 2.5" / 6 cm (Integrated or Remote Driver)	<b>BL</b> Matte Black <b>PC</b> Pol. Chrome <b>WH</b> White <b>SG</b> Satin Gold <b>BZ</b> Bronze <b>SS</b> Satin Silver
MPC	<b>38" Multi-Port Rectangle - 10 Port</b> C-MPT-3810-# <b>38" Multi-Port Rectangle - 18 Port</b> C-MPT-3818-#	 7.5" OC 19 cm 3" OC 7.6 cm 37.7" / 97.8 cm 4.1" OC 10.4 cm 2.5" OC 6.4 cm 10 Port 18 Port 37.7" / 97.8 cm	 4.7" / 11.9 cm 6" / 15.2 cm 2.5" / 6 cm (Integrated Driver)	<b>BL</b> Matte Black <b>PC</b> Pol. Chrome <b>WH</b> White <b>SG</b> Satin Gold <b>BZ</b> Bronze <b>SS</b> Satin Silver
MPC	<b>22" Multi-Port Linear - 5 Port</b> C-MPL-2205-# <b>48" Multi-Port Linear - 11 Port</b> C-MPL-4811-#	 4.4" OC 11.2 cm 2.8" / 7 cm 21.8" / 56 cm 4.4" OC 11.2 cm 2.8" / 7 cm 5 Port 11 Port 48" / 123 cm	 2.8" / 7 cm 1.4" / 4 cm (Integrated or Remote Driver)	<b>BL</b> Matte Black <b>PC</b> Pol. Chrome <b>WH</b> White <b>SG</b> Satin Gold <b>BZ</b> Bronze <b>SS</b> Satin Silver
MPC	<b>10" Round - 3 Port</b> C-MPR-1003-# <b>10" Round - 9 Port</b> C-MPR-1009-#	 11" dia. / 27.9 cm 7.4" OC 18.8 cm 2.9" OC 7.4 cm 3 Port 9 Port	 10" dia. / 25.4 cm 2.1" / 5.3 cm (Integrated Driver)	<b>BL</b> Matte Black <b>PC</b> Pol. Chrome <b>WH</b> White <b>SG</b> Satin Gold <b>BZ</b> Bronze <b>SS</b> Satin Silver
MPC	<b>20" Round - 3 Port</b> C-MPR-2003-# <b>20" Round - 12 Port</b> C-MPR-2012-#	 20" dia. / 50.8 cm 14.5" OC 36.8 cm 6.4" OC 16.3 cm 3 Port 12 Port	 18" dia. / 45.7 cm 2.5" / 6 cm (Integrated Driver)	<b>BL</b> Matte Black <b>PC</b> Pol. Chrome <b>WH</b> White <b>SG</b> Satin Gold <b>BZ</b> Bronze <b>SS</b> Satin Silver
JTA	<b>24" JackTrack</b> #-#-# <b>48" JackTrack</b> #-#-# <b>94" JackTrack</b> #-#-#	 23" / 58.4 cm 47" / 119.4 cm 94" / 238.8 cm 1.75" / 4.5 cm 1.75" / 4.5 cm 1.75" / 4.5 cm	 1.38" / 3.5 cm 1.75" / 4.5 cm (Remote Driver)	<b>BL</b> Matte Black <b>WH</b> White

For more information see [www.Blackjacklighting.com](http://www.Blackjacklighting.com)

(# symbol indicates additional specification required)


System	Pendant Mounting	Configuration Examples	Finish Options
--------	------------------	------------------------	----------------

**Quatro**


**4S (4' 2x2 / 9 Port)**  
MSQ-2409-##-4S-##

MPC

**Square Configurations** - See [Quatro Square Configurations](#) section of our website for specification information (#)

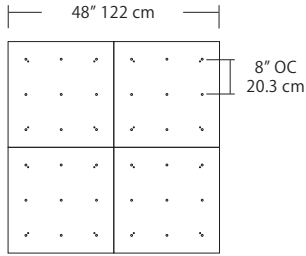


**6S (6' 3x3 / 25 Port)**  
MSQ-2425-##-6S-##

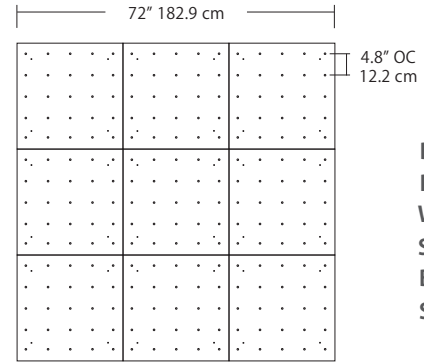


- BL** Matte Black
- PC** Pol. Chrome
- WH** White
- SG** Satin Gold
- BZ** Bronze
- SS** Satin Silver

**4L (4'x2' / 9 Port)**  
MSQ-2409-##-4L-##

**Linear Configurations** - See [Quatro Linear Configurations](#) section of our website for specification information (#)

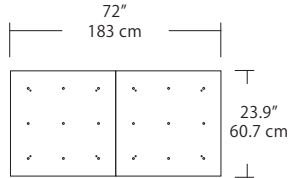

**6L (6'x2' / 25 Port)**  
MSQ-2425-##-6L-##

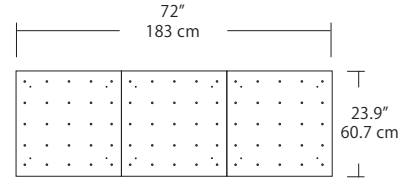


**Duo**

**6L (6'4"x6" / 10 Port)**  
MSD-3810-##-6L-##


MPC

**Linear Configurations** - See [Duo Linear Configurations](#) section of our website for specification information (#)

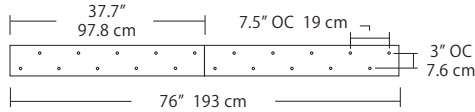



- BL** Matte Black
- PC** Pol. Chrome
- WH** White
- SG** Satin Gold
- BZ** Bronze
- SS** Satin Silver

**9L (9'6"x6" / 18 Port)**  
MSD-3818-##-9L-##

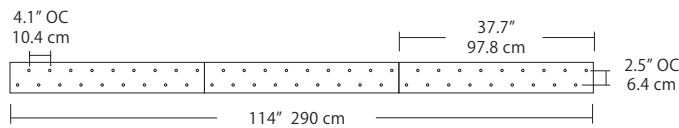

**Solo**



**Solo 48" Linear Configuration** - See [Solo Linear Configuration](#) section of our website for specific information (#)

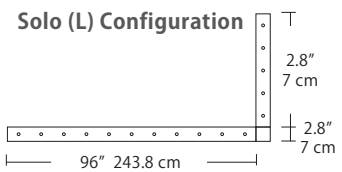

**Solo 22" Grid Configuration** - See [Solo Grid Configuration](#) section of our website for specific information (#)

MPC

**Solo 48" Grid Configuration**

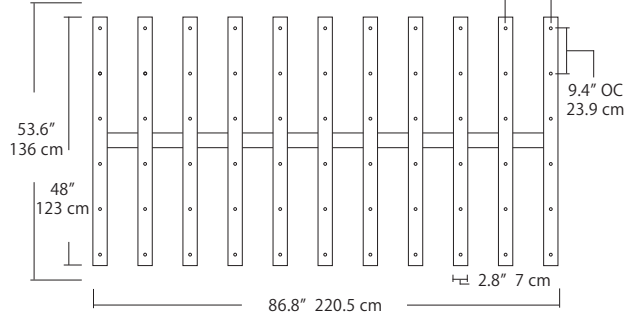

- BL** Matte Black
- PC** Pol. Chrome
- WH** White
- SG** Satin Gold
- BZ** Bronze
- SS** Satin Silver