

FROST VANITY

FRS-25V (25")

CAUTION

TURN OFF THE MAIN POWER AT THE CIRCUIT BREAKER BEFORE INSTALLING THE FIXTURE IN ORDER TO PREVENT POSSIBLE SHOCK

IF YOU ARE UNFAMILIAR WITH PROPER ELECTRICAL WIRING CONNECTIONS OBTAIN THE SERVICES OF A QUALIFIED ELECTRICIAN

GENERAL

- Read all instructions carefully for safe operation and installation.
- All electrical connections must be in accordance with local and national electrical code (N.E.C) standards.
- Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instruction. Please contact Blackjack Lighting if any parts are missing or damaged.
- This product is suitable for damp locations.

INSTALLATION**PREPARATION**

1. Remove the fixture from its box.
2. Remove the decorative plate/ glass assembly(14/15) from the fixture pan(11) by loosening the two Thumbscrews(18).
3. Remove the back panel(10) from the fixture pan(11) by loosening the four screws(12)

MOUNTING

4. Pull the supply wires (2&4) and the house ground wire(6) out of the outlet box(1) and install the cross bar(17) to the outlet box(1) by using the two mounting screws (9).
5. Place the back panel(10) over the cross bar(17) through the two outward screws(16) and secure it by tightening the two hex nuts(13).

ELECTRICAL CONNECTIONS

6. Using the wire connectors(8), connect the white supply wire(2) to the white fixture wire(3); connect the black supply wire(4) to the black fixture wire(5); and connect the house ground wire(6) to the fixture ground wire(7).

FINAL ASSEMBLY

7. Align the four holes on the fixture pan(11) with the four screws(12) and securely tighten the fixture pan(11) to the back panel(10)
8. Assemble the decorative plate/ glass assembly(14/15), to the fixture pan(11) by aligning the holes on the bottom of the fixture pan(11) with the holes on the bottom of the assembly(14/15), then inserting and tightening the two thumbscrews(18)

DIMMING

- Fixture Dimming Type: TRIAC dimmable
- For recommended dimmers see <https://www.blackjacklighting.com/dimming-information>

HARDWARE



Wire Connectors(#8)

[3 Included]

Mounting Screws(#9)

[2 Included]

Screws(#12)

[4 Included]

Hex Nut(#13)


[2 Included]

Outward Screw(#16)

[2 Included]

Thumb screws(#18)

[2 Included]

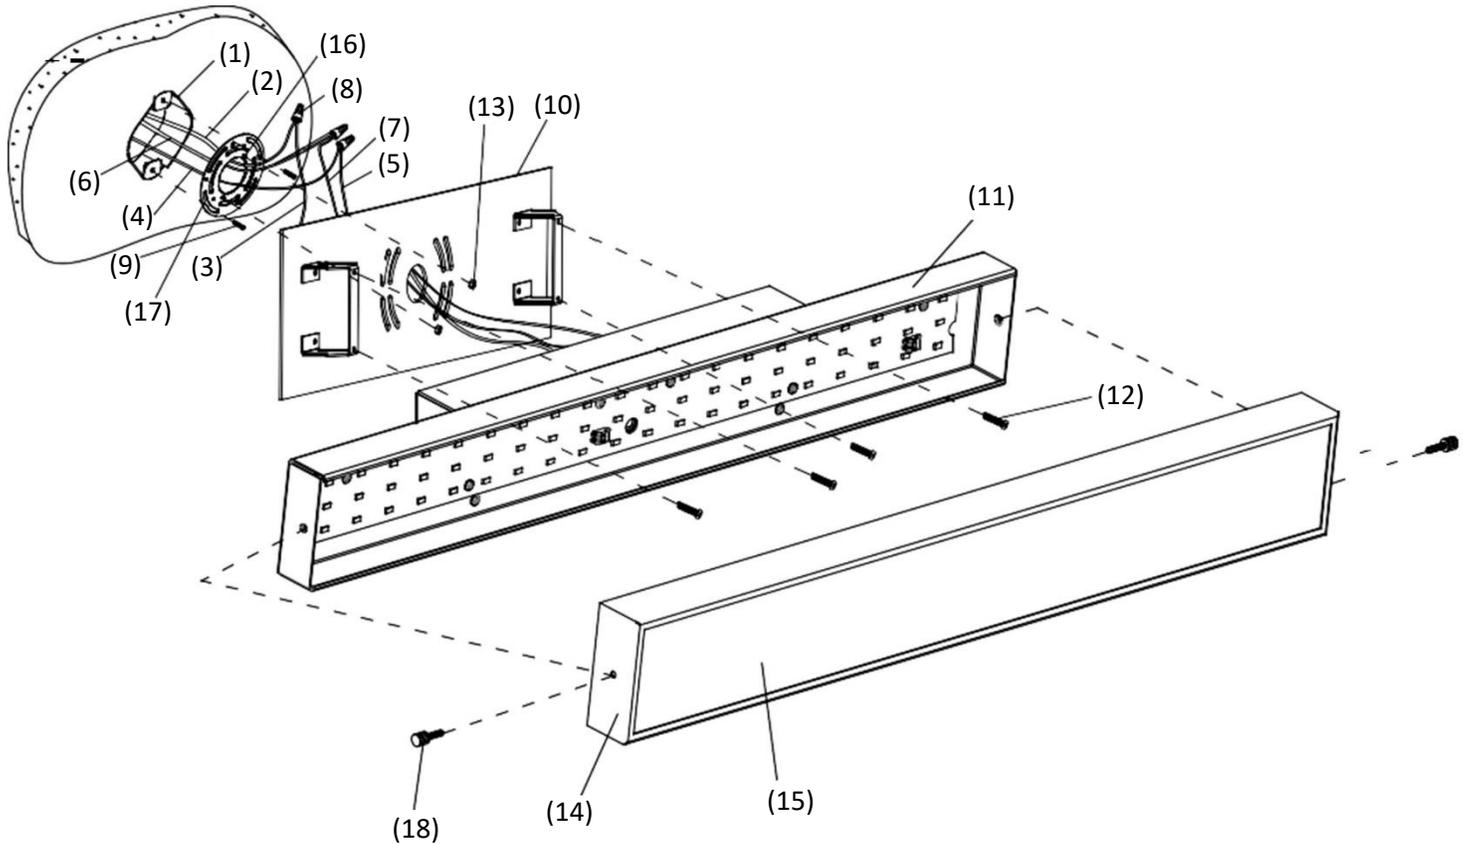

- | | |
|---|--|
| <ol style="list-style-type: none"> 1. OUTLET BOX (by others) 2. WHITE SUPPLY WIRE 3. WHITE FIXTURE WIRE 4. BLACK SUPPLY WIRE 5. BLACK FIXTURE WIRE 6. HOUSE GROUND WIRE 7. FIXTURE GROUND WIRE 8. WIRE CONNECTORS 9. MOUNTING SCREWS | <ol style="list-style-type: none"> 10. BACK PANEL 11. FIXTURE PAN 12. SCREWS 13. HEX NUT 14. DECORATIVE PLATE 15. GLASS 16. OUTWARD SCREW 17. CROSS BAR 18. THUMBSCREWS |
|---|--|