

**Project:**

**Note:**

**Type:**

**Quantity:**

**Model#:** SP - LGD - FL - 01 - \_\_\_ - \_\_\_ - \_\_\_ - \_\_\_ - \_\_\_

**Description**

The Filament pendant features a clear acrylic diffuser with a laser etched filament design, reminiscent of light sources of by-gone eras. Light from the integrated LED source evenly lights the diffuser to create pleasing illumination that delivers a fun and unique touch to any space.

**Specifications**

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K (standard)
- Cable Length: 8' (see page 2 for detail), for longer lengths consult factory
- For recommended dimmers see <https://www.blackjacklighting.com/dimming-information>


**Features**

- Screw-in, decorative optical acrylic light guide
- Suspends from an 8' adjustable cable
- Damp location rated

**Options**

- Color Temperature: 2700K, 3000K, 3500K, 4000K
- Lumens: 2W/90 Lumens or 3W/140 Lumens (recommended for single pendant application)
- Lamping 2W or 3W
- Standard Finishes: BL - Black, PC - Polished Chrome or WH - White
- Special Order Powder Coat Finishes: BZ - Bronze, SG - Satin Gold or SS - Satin Silver
- Mounting: See page 2 for mounting options

**Dimensions**

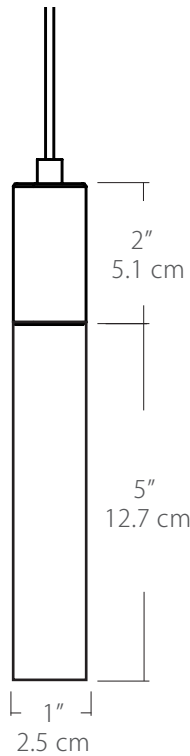

**Diffuser**



**ORDERING GUIDE**

Category	Series	Diffuser	Size	Finish	Color Temp.	Wattage	Mounting	Length
<b>SP</b> SP Small Pendant	<b>LGD</b> LGD Light Guide	<b>FL</b> FL Filament	<b>01</b> 01 1" Diameter	<b>BL</b> Black <b>PC</b> Polished Chrome <b>WH</b> White <b>BZ</b> Bronze <b>SG</b> Satin Gold <b>SS</b> Satin Silver	<b>30K</b> 27K 2700K 30K 3000K 35K 3500K 40K 4000K	<b>2W</b> 2Watts/ 90Lm <b>3W</b> 3Watts/ 140Lm (recommended for single pendant application)	<b>SP5</b> 5" Canopy <b>SP2</b> 2.5" Fascia Canopy <b>MPC</b> Multi-Port Connector <b>JTA</b> JackTrack Adapter  (See page 2 for mounting information)	<b>BLANK</b> (Leave blank for standard 96" cable length) <b>###</b> for cable length longer than 96" specify cable length in inches


Example: SP-LGD-FL-01-BL-30K-2W-SP2-

(30K Standard)


**Finish**


<p><b>Finish</b></p>  <p>PC BL WH BZ SG SS</p>	 <p><b>PC</b> - Polished Chrome</p>	 <p><b>BL</b> - Matte Black</p>	 <p><b>WH</b> - White</p>	 <p><b>BZ</b> - Bronze</p>	 <p><b>SG</b> - Satin Gold</p>	 <p><b>SS</b> - Satin Silver</p>
<p><b>Standard Finishes</b></p>			<p><b>Special Order Powder Coat Finishes</b></p>			

**Wattage**


<p><b>Wattage</b></p>  <p>2W 3W</p>	<p><b>2W</b> = 2 Watts / 90 Lumens, recommended for Multi-Port applications (Multi-Port system and JackTrack adapter).</p> <p><b>3W</b> = 3 Watts / 140 Lumens, recommended for single pendant applications (5" Canopy and 2.5" Fascia Canopy).</p> <p>(Lumens measured at 3000K)</p>
--	---

**Mounting**

<p><b>Mounting</b></p>  <p>SP5 SP2 MPC JTA</p>	<p><b>SP5</b> = 5" canopy with integrated driver (included), attaches to rear of canopy and sits inside ceiling mounted junction box <i>Cable with modular connector attaches to canopy w/ integrated universal driver (120-277V / TRIAC, ELV, 0-10V dimming)</i></p> <p><b>SP2</b> = 2.5" thin profile canopy that attaches flush to a rigid ceiling (driver sold separately) <i>Cable with modular connector (and optional wire harness) attaches to a remote driver</i></p> <p><b>MPC</b> = Multi-port connector attaches to any of BlackJack's Multi-Port canopies (canopy and driver sold separately) <i>Cable with modular connector attaches to a driver inside a Multi-Port canopy (driver may be remote)</i></p> <p><b>JTA</b> = Adapter connects the pendant in any position along the JackTrack system (track and driver sold separately) <i>Cable is cut to length and inserted in a connector at the bottom of the JackTrack adapter</i></p>
---	---



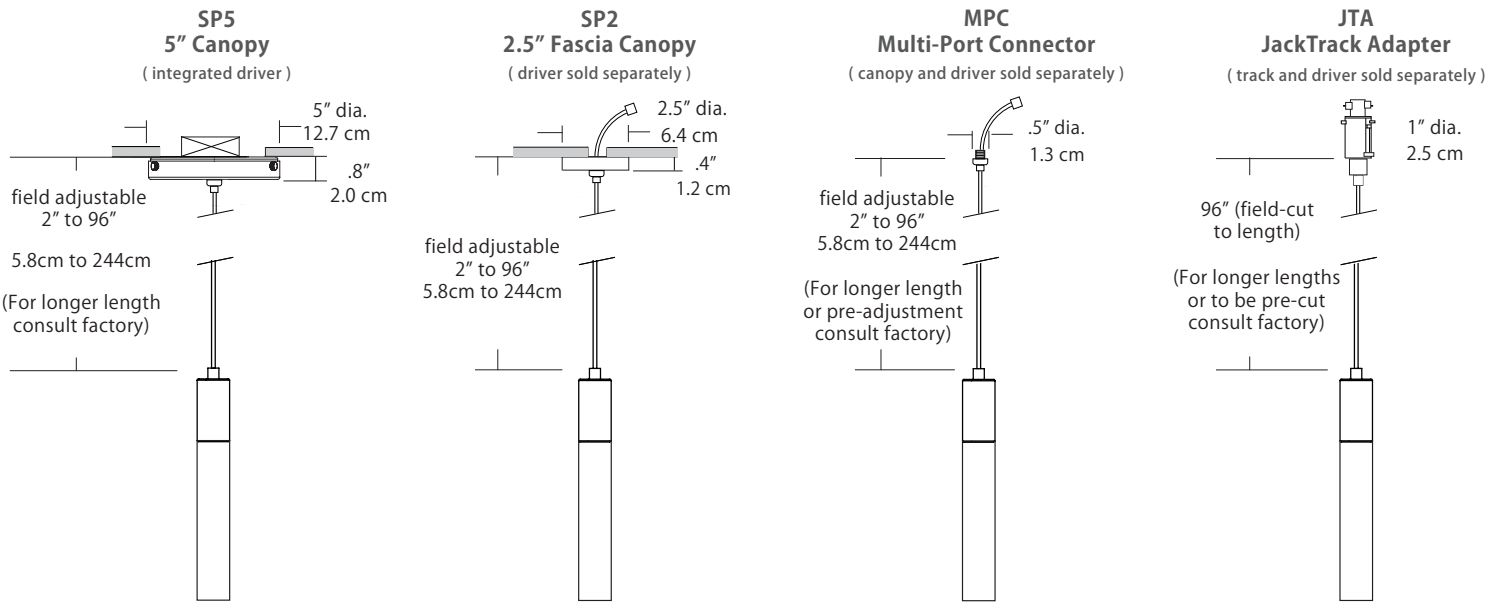

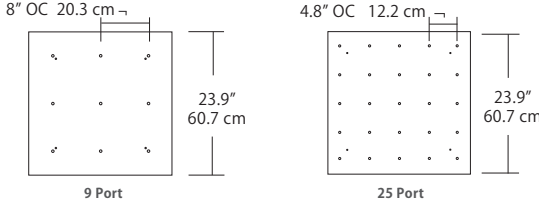

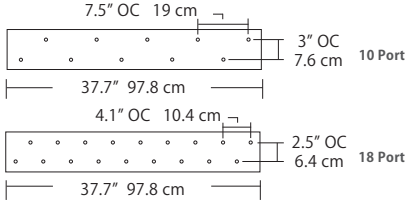

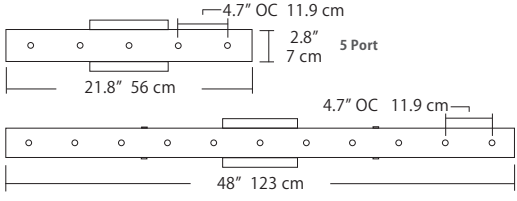

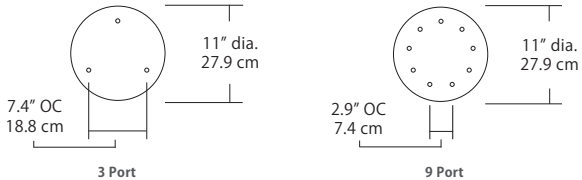

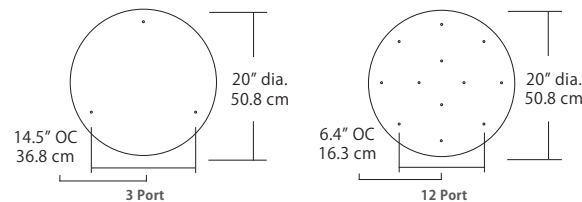

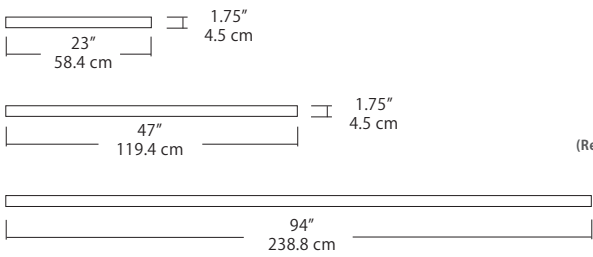



**Max Cable Length**

<p><b>Length</b></p>  <p>BLANK ###</p>	<p><b>BLANK</b> = Leave blank for standard 96" cable length.</p> <p><b>###</b> = Specify maximum cable length needed for fixture (in inches).</p> <p>Factory pre-configuration of cable length is available. Consult factory for details.</p>
---	---

For full specifications and ordering information see [blackjacklighting.com](http://blackjacklighting.com)

(# symbol indicates additional specification required)

Pendant Mounting	Canopy	Dimensions	End / Side View	Finish Options
SP5	<b>5" Canopy</b> Canopy and driver included with pendant	 5" dia. 12.7 cm	 (Integrated Driver) .8" / 2 cm	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
SP2	<b>2.5" Fascia Canopy</b> Canopy included with pendant. Driver sold separately.	 2.5" dia. 6.4 cm	 (Remote Driver) .4" / 1.3 cm	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	<b>24" Multi-Port Square - 9 Port</b> C-MPS-2409-#  <b>24" Multi-Port Square - 25 Port</b> C-MPS-2425-#	 8" OC 20.3 cm 23.9" 60.7 cm 4.8" OC 12.2 cm 23.9" 60.7 cm 9 Port 25 Port	 21.5" 54.6 cm 2.5" 6 cm (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	<b>38" Multi-Port Rectangle - 10 Port</b> C-MPT-3810-#  <b>38" Multi-Port Rectangle - 18 Port</b> C-MPT-3818-#	 7.5" OC 19 cm 37.7" 97.8 cm 3" OC 7.6 cm 10 Port 4.1" OC 10.4 cm 2.5" OC 6.4 cm 18 Port 37.7" 97.8 cm	 4.7" 11.9 cm 2.5" 6 cm 6" 15.2 cm (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	<b>22" Multi-Port Linear - 5 Port</b> C-MPL-2205-#  <b>48" Multi-Port Linear - 11 Port</b> C-MPL-4811-#	 4.7" OC 11.9 cm 21.8" 56 cm 2.8" 7 cm 5 Port 4.7" OC 11.9 cm 48" 123 cm 2.8" 7 cm 11 Port	 2.8" 7 cm 1.4" 4 cm (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	<b>10" Round - 3 Port</b> C-MPR-1003-#  <b>10" Round - 9 Port</b> C-MPR-1009-#	 7.4" OC 18.8 cm 11" dia. 27.9 cm 3 Port 2.9" OC 7.4 cm 11" dia. 27.9 cm 9 Port	 10" dia. 25.4 cm 2.1" 5.3 cm (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	<b>20" Round - 3 Port</b> C-MPR-2003-#  <b>20" Round - 12 Port</b> C-MPR-2012-#	 14.5" OC 36.8 cm 20" dia. 50.8 cm 3 Port 6.4" OC 16.3 cm 20" dia. 50.8 cm 12 Port	 18" dia. 45.7 cm 2.5" 6 cm (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
JTA	<b>24" JackTrack</b> #-#-#  <b>48" JackTrack</b> #-#-#  <b>94" JackTrack</b> #-#-#	 23" 58.4 cm 1.75" 4.5 cm 47" 119.4 cm 1.75" 4.5 cm 94" 238.8 cm 1.75" 4.5 cm	 1.38" 3.5 cm 1.75" 4.5 cm (Remote Driver)	BL Matte Black WH White

For more information see [www.Blackjacklighting.com](http://www.Blackjacklighting.com)

(# symbol indicates additional specification required)


System	Pendant Mounting	Configuration Examples	Finish Options
--------	------------------	------------------------	----------------

**Quatro**


**4S (4' 2x2 / 9 Port)**  
MSQ-2409-##-4S-##

MPC

**Square Configurations** - See [Quatro Square Configurations](#) section of our website for specification information (#)

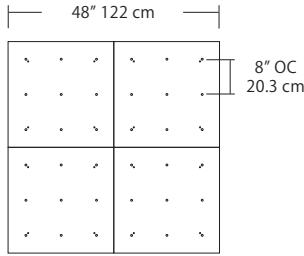


**6S (6' 3x3 / 25 Port)**  
MSQ-2425-##-6S-##

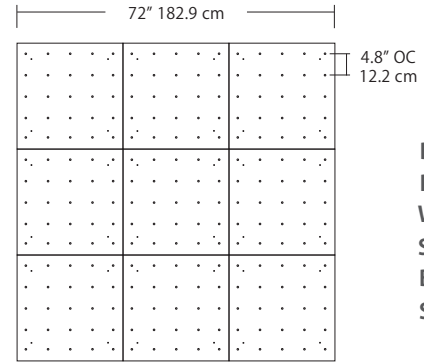


- BL** Matte Black
- PC** Pol. Chrome
- WH** White
- SG** Satin Gold
- BZ** Bronze
- SS** Satin Silver

**4L (4'x2' / 9 Port)**  
MSQ-2409-##-4L-##

**Linear Configurations** - See [Quatro Linear Configurations](#) section of our website for specification information (#)

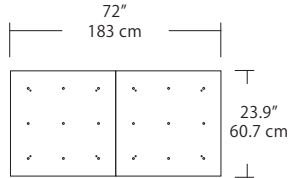

**6L (6'x2' / 25 Port)**  
MSQ-2425-##-6L-##

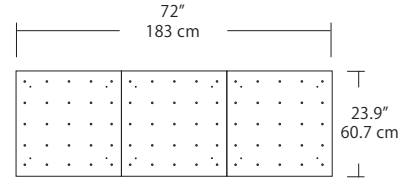


**Duo**

**6L (6'4"x6" / 10 Port)**  
MSD-3810-##-6L-##


MPC

**Linear Configurations** - See [Duo Linear Configurations](#) section of our website for specification information (#)

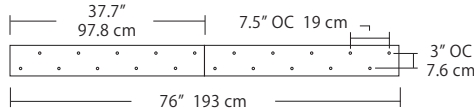



- BL** Matte Black
- PC** Pol. Chrome
- WH** White
- SG** Satin Gold
- BZ** Bronze
- SS** Satin Silver

**9L (9'6"x6" / 18 Port)**  
MSD-3818-##-9L-##

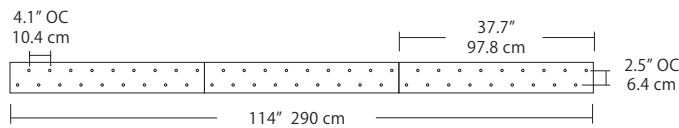

**Solo**



**Solo 48" Linear Configuration** - See [Solo Linear Configuration](#) section of our website for specific information (#)

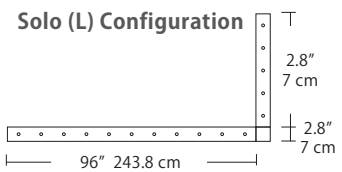

**Solo 22" Grid Configuration** - See [Solo Grid Configuration](#) section of our website for specific information (#)

MPC

**Solo 48" Grid Configuration**

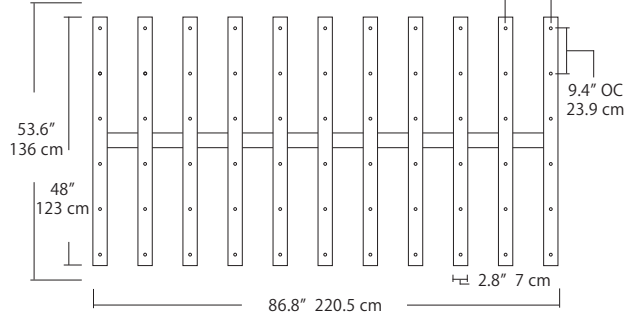

- BL** Matte Black
- PC** Pol. Chrome
- WH** White
- SG** Satin Gold
- BZ** Bronze
- SS** Satin Silver